



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area  
**Store 3 - Norton**  
 Machine Id  
**JOHN DEERE 850L D18 (S/N F446525)**  
 Component  
**Front Left Final Drive**  
 Fluid  
**GEAR OIL SAE 90 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0047730	---	---
Sample Date		Client Info		04 Jan 2024	---	---
Machine Age	hrs	Client Info		521	---	---
Oil Age	hrs	Client Info		521	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

**WEAR**

All component wear rates are normal.

PQ		ASTM D8184	>1250	172	---	---
Iron	ppm	ASTM D5185m	>750	114	---	---
Chromium	ppm	ASTM D5185m	>9	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	4	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	19	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

**FLUID CONDITION**

The oil viscosity is lower than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m	>51	2	---	---
Boron	ppm	ASTM D5185m	400	<1	---	---
Barium	ppm	ASTM D5185m	200	3	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	12	109	---	---
Calcium	ppm	ASTM D5185m	150	3559	---	---
Phosphorus	ppm	ASTM D5185m	1650	1058	---	---
Zinc	ppm	ASTM D5185m	125	1262	---	---
Sulfur	ppm	ASTM D5185m	22500	3795	---	---
Visc @ 40°C	cSt	ASTM D445	183	▲ 56.7	---	---

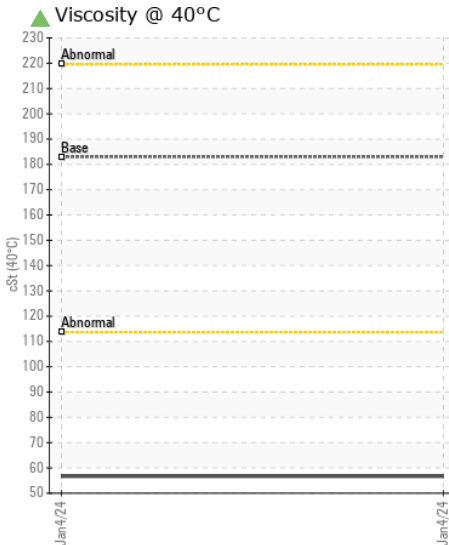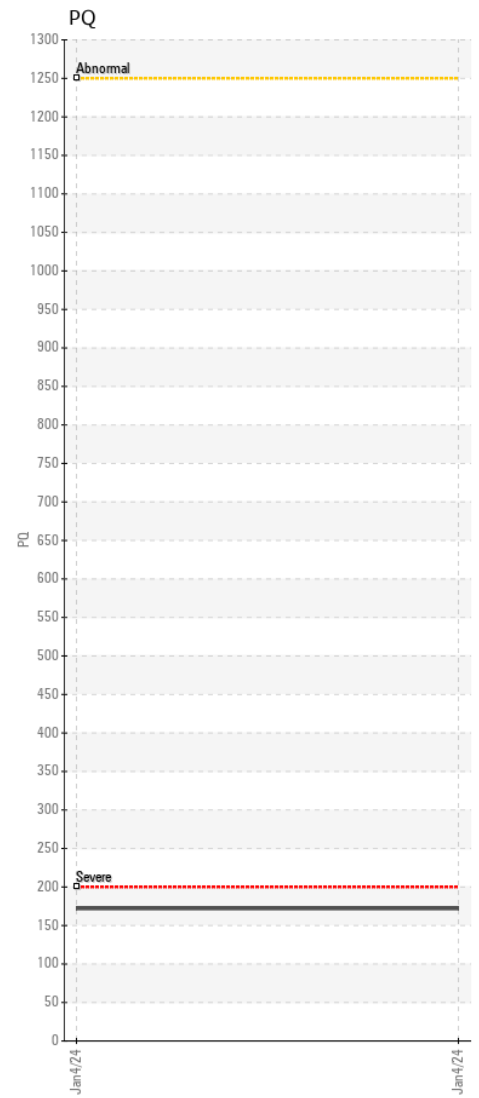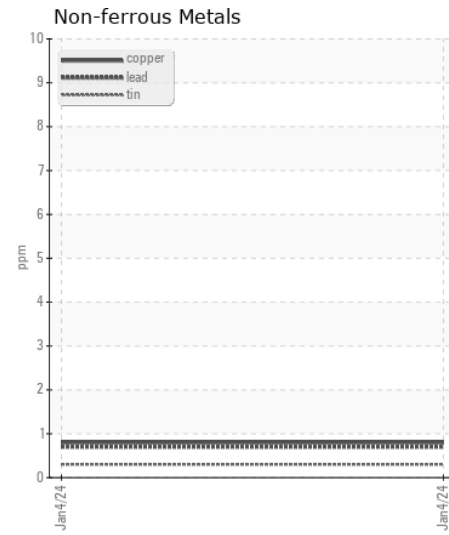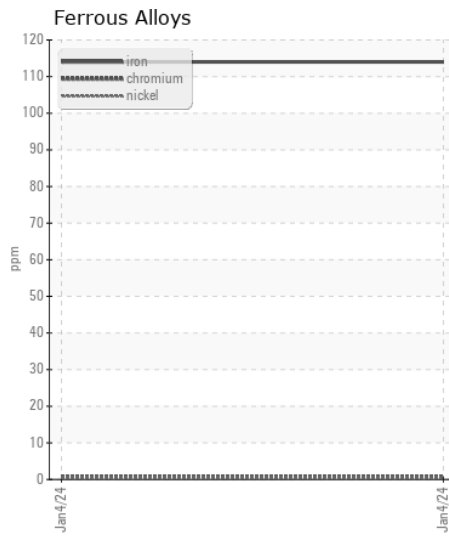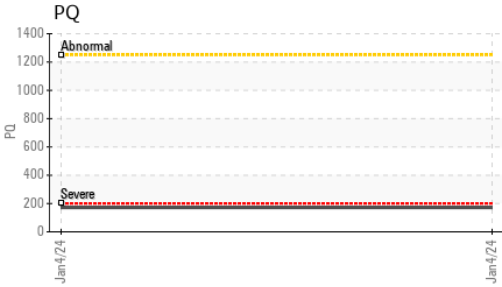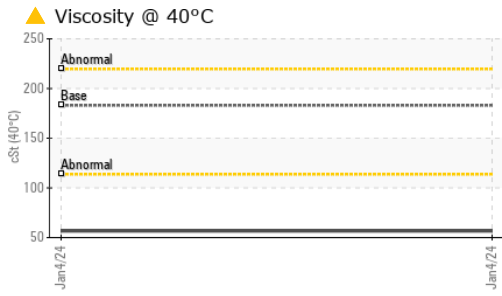

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0047730 **Received** : 17 Jan 2024  
**Lab Number** : 06063868 **Diagnosed** : 20 Jan 2024  
**Unique Number** : 10835250 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LANE PIPELINE**  
 2946 E MAIN ST  
 BRIDGEPORT, WV  
 US 26330

Contact: JESSE WILBURN  
 jessewilburn@gmail.com

T: (740)440-0927

F: