



# VOLVO

## OIL ANALYSIS REPORT

WEAR  
CONTAMINATION  
FLUID CONDITION

**ATTENTION**  
**ABNORMAL**  
**NORMAL**



Area  
**[659877]**  
Machine Id  
**VOLVO L120H 632860**  
Component  
**Diesel Engine**  
Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP437448</b>	VCP432769	VCP370518
Sample Date		Client Info		<b>15 Jan 2024</b>	06 Sep 2023	06 Jun 2023
Machine Age	hrs	Client Info		<b>6693</b>	5768	4936
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>39</b>	46	24
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>▲ 15</b>	▲ 19	9
Lead	ppm	ASTM D5185m	>40	<b>4</b>	5	0
Copper	ppm	ASTM D5185m	>20	<b>3</b>	3	1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION













Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>20	<b>▲ 30</b>	▲ 44	▲ 21
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	1.2	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.4</b>	11.0	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.6</b>	24.2	22.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	4	2
Boron	ppm	ASTM D5185m	2.5	<b>26</b>	20	28
Barium	ppm	ASTM D5185m	0.0	<b>3</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.7	<b>56</b>	49	50
Manganese	ppm	ASTM D5185m	0.0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	256	<b>621</b>	537	455
Calcium	ppm	ASTM D5185m	2057	<b>1897</b>	2150	1657
Phosphorus	ppm	ASTM D5185m	935	<b>1060</b>	1119	907
Zinc	ppm	ASTM D5185m	1223	<b>1357</b>	1348	1017
Sulfur	ppm	ASTM D5185m	4079	<b>3483</b>	3762	3091
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.5</b>	22.6	19.7
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>8.3</b>	7.5	9.1
Visc @ 100°C	cSt	ASTM D445	15.0	<b>14.4</b>	14.4	14.1

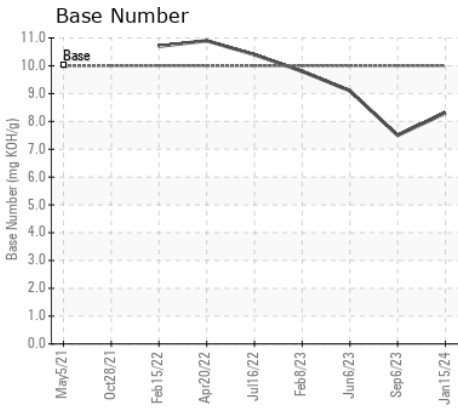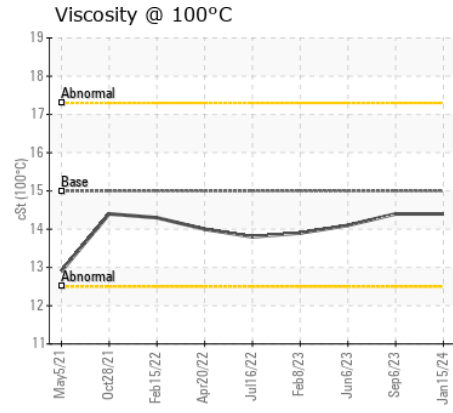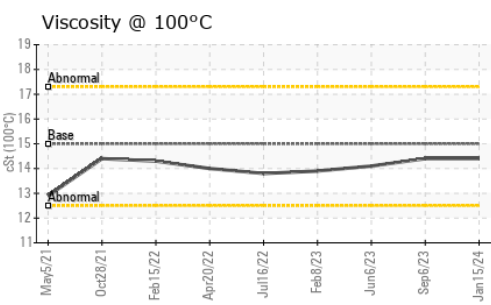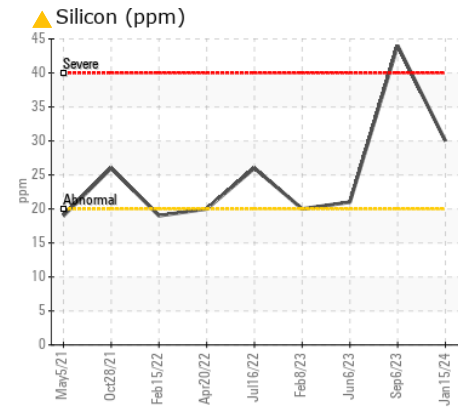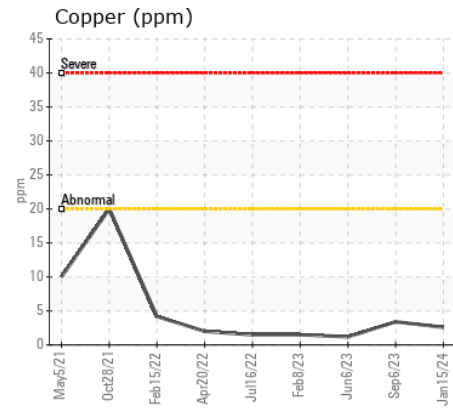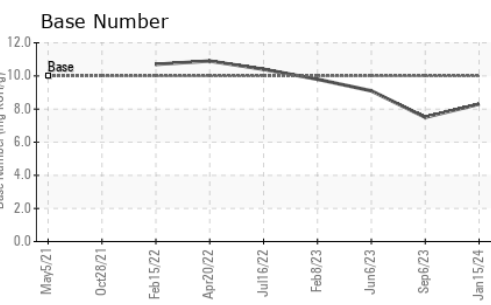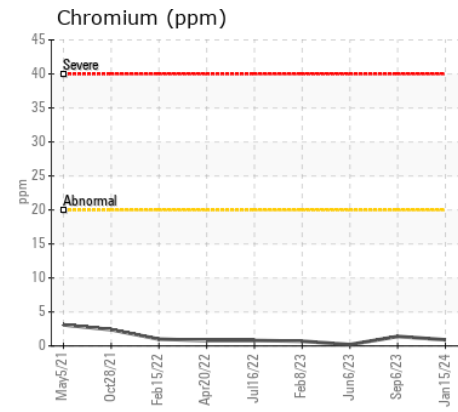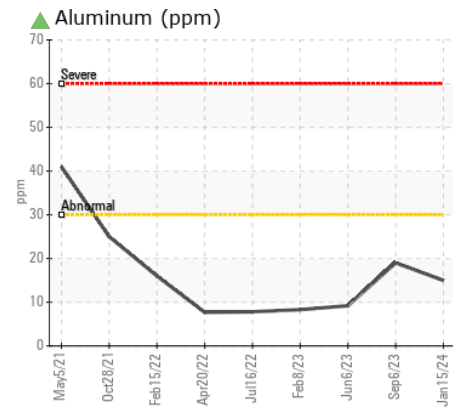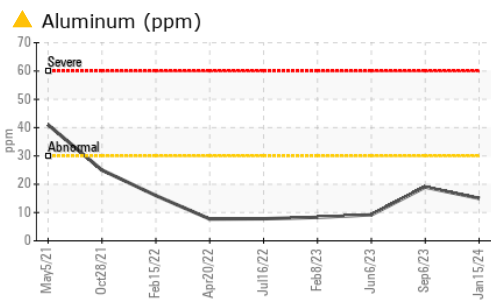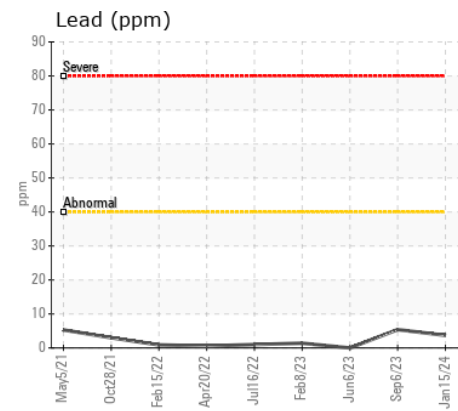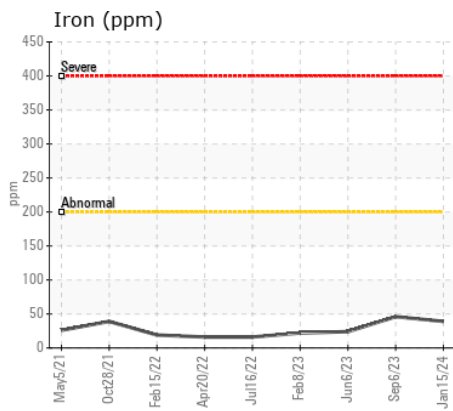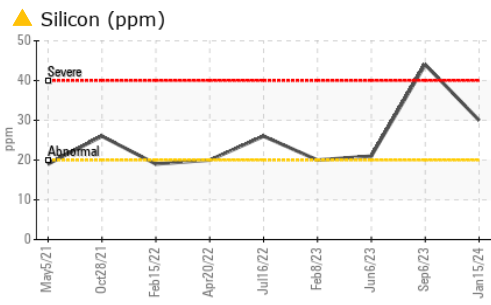

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP437448 **Received** : 18 Jan 2024  
**Lab Number** : 06063967 **Diagnosed** : 20 Jan 2024  
**Unique Number** : 10835349 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ORANGE COUNTY SOLID WASTE**  
 5901 YOUNG PINE ROAD  
 ORLANDO, FL  
 US 32829  
 Contact: MICHAEL BEEBE  
 michael.beebe@ocfl.net  
 T: (407)836-6652  
 F: (407)836-6650

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)