



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id
7492L
 Component
Diesel Engine
 Fluid
{not provided} (--- QTS)

RECOMMENDATION

The oil is near the end of it's useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06063995	---	---
Sample Date		Client Info		29 Dec 2023	---	---
Machine Age	mls	Client Info		0	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	60	---	---
Chromium	ppm	ASTM D5185m	>20	3	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	9	---	---
Lead	ppm	ASTM D5185m	>40	14	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	---	---
Potassium	ppm	ASTM D5185m	>20	23	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	15.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	35.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN level is low.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		64	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		1058	---	---
Calcium	ppm	ASTM D5185m		1120	---	---
Phosphorus	ppm	ASTM D5185m		1015	---	---
Zinc	ppm	ASTM D5185m		1315	---	---
Sulfur	ppm	ASTM D5185m		3047	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	41.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		▲ 2.7	---	---
Visc @ 100°C	cSt	ASTM D445		14.4	---	---

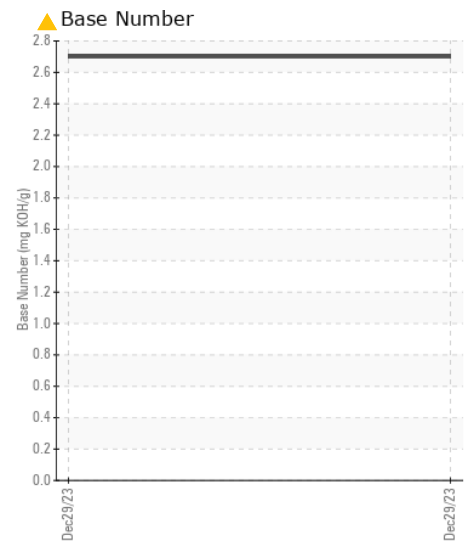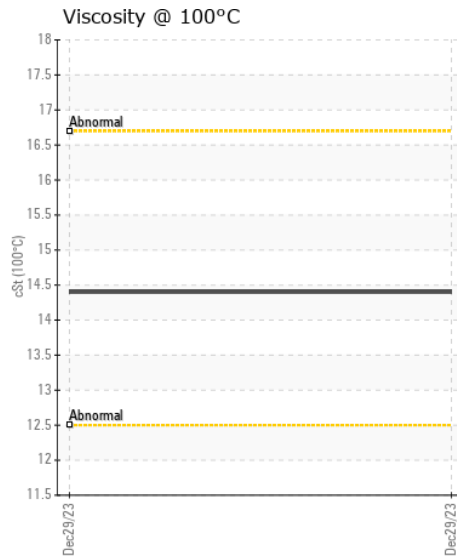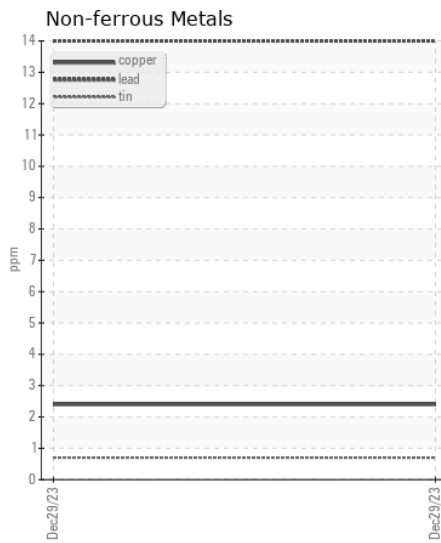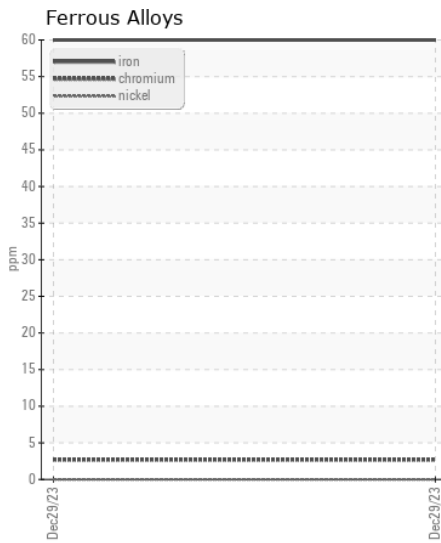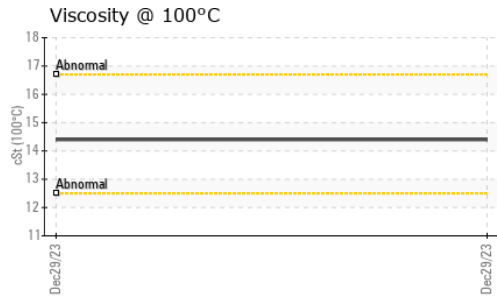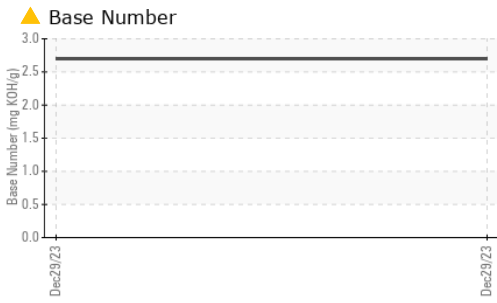

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06063995 **Received** : 18 Jan 2024
Lab Number : 06063995 **Diagnosed** : 20 Jan 2024
Unique Number : 10835377 **Diagnostician** : Don Baldrige
Test Package : FLEET

RUSH TRUCK CENTER - CHICAGO IDEALEASE
 4655 SOUTH CENTRAL AVENUE
 CHICAGO, IL
 US 60638

Contact: MIKE LINLEY
 linleym@rushtruckcenters.com
 T: (708)496-7500
 F: (708)496-8818

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)