



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

[W63135]

Machine Id

JOHN DEERE 470G 1FF470GXAFE471337

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (26 GAL)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W63135)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0188423	JR0177375	JR0161791
Sample Date		Client Info		16 Jan 2024	16 Aug 2023	18 Apr 2023
Machine Age	hrs	Client Info		10095	9557	8986
Oil Age	hrs	Client Info		538	9007	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	35	▲ 62	27
Chromium	ppm	ASTM D5185m	>11	<1	2	1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>31	3	7	2
Lead	ppm	ASTM D5185m	>26	<1	▲ 61	7
Copper	ppm	ASTM D5185m	>26	13	6	2
Tin	ppm	ASTM D5185m	>4	1	2	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elemental level of silicon (Si) above normal.


Silicon	ppm	ASTM D5185m	>22	▲ 51	12	8
Potassium	ppm	ASTM D5185m	>20	9	1	2
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.5	▲ 4.3	2.5
Nitration	Abs/cm	*ASTM D7624	>20	9.0	16.5	12.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	40.3	30.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	3	7	3
Boron	ppm	ASTM D5185m		250	105	191
Barium	ppm	ASTM D5185m		4	0	0
Molybdenum	ppm	ASTM D5185m		251	249	232
Manganese	ppm	ASTM D5185m		4	2	<1
Magnesium	ppm	ASTM D5185m		873	899	835
Calcium	ppm	ASTM D5185m		1372	2079	1873
Phosphorus	ppm	ASTM D5185m		873	1288	1174
Zinc	ppm	ASTM D5185m		1116	1596	1458
Sulfur	ppm	ASTM D5185m		3191	3777	3178
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	30.7	22.5
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.5	▲ 0.0	9.8
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	15.1	16.0


▲ Silicon (ppm)

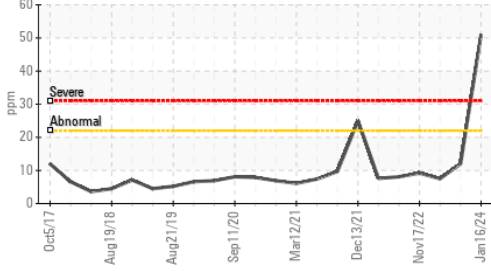


Ferrous Alloys

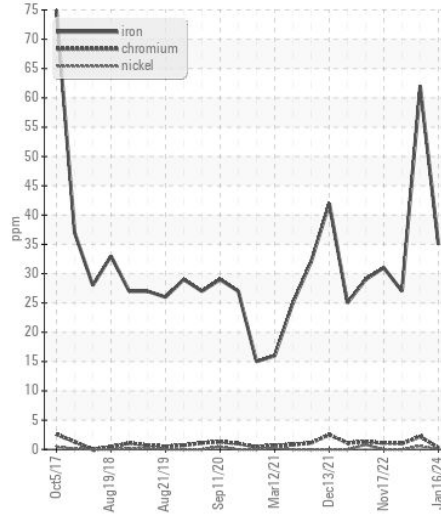


Base Number

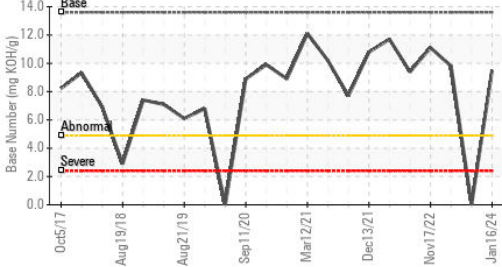


Non-ferrous Metals

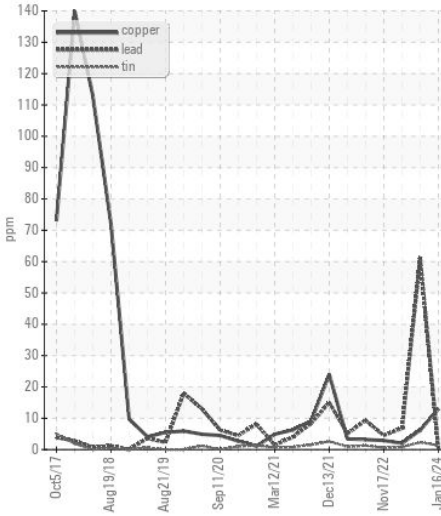


Viscosity @ 100°C

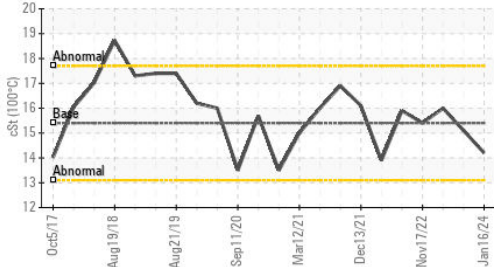

Viscosity @ 100°C

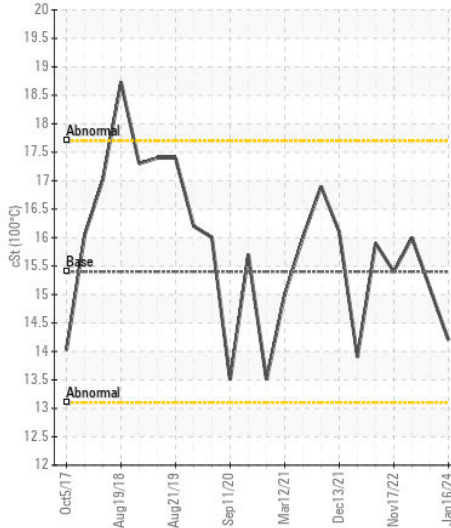

Base Number

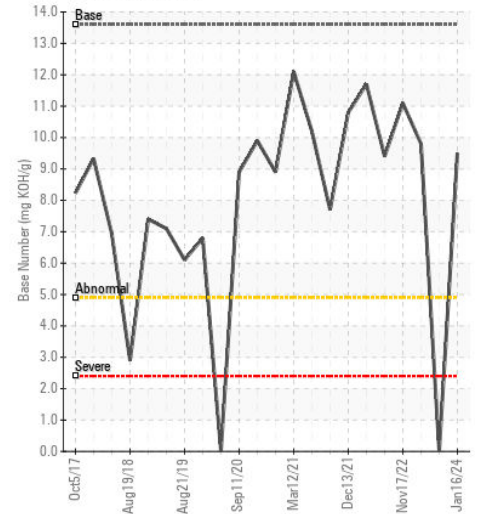

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0188423 **Received** : 18 Jan 2024
Lab Number : 06064040 **Diagnosed** : 20 Jan 2024
Unique Number : 10835422 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198