



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
10623

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (13 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0109861 | GFL0101176 | GFL0101252 |
| Sample Date | | Client Info | | 12 Jan 2024 | 29 Dec 2023 | 22 Nov 2023 |
| Machine Age | hrs | Client Info | | 19488 | 19355 | 19203 |
| Oil Age | hrs | Client Info | | 133 | 582 | 430 |
| Filter Age | hrs | Client Info | | 133 | 582 | 430 |
| Oil Changed | | Client Info | | Not Changd | Changed | Not Changd |
| Filter Changed | | Client Info | | Not Changd | Changed | Not Changd |
| Sample Status | | | | NORMAL | MARGINAL | ABNORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 5 | 8 | 5 |
| Chromium | ppm | ASTM D5185m | >5 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >15 | 2 | 2 | <1 |
| Lead | ppm | ASTM D5185m | >25 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >100 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >4 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 3 | 7 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | 0 |
| Fuel | | WC Method | >3.0 | <1.0 | ▲ 1.9 | ▲ 4.5 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >6 | 0.2 | 0.3 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 5.5 | 7.0 | 6.9 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 17.2 | 18.3 | 17.8 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|--------|
| Sodium | ppm | ASTM D5185m | | 8 | 21 | 18 |
| Boron | ppm | ASTM D5185m | 0 | 7 | 8 | 5 |
| Barium | ppm | ASTM D5185m | 0 | 3 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 60 | 58 | 54 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m | 1010 | 922 | 864 | 829 |
| Calcium | ppm | ASTM D5185m | 1070 | 1028 | 1002 | 1042 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 958 | 1018 | 971 |
| Zinc | ppm | ASTM D5185m | 1270 | 1180 | 1176 | 1126 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3233 | 2788 | 2640 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 12.5 | 13.7 | 13.4 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.3 | 7.9 | 7.7 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.3 | 13.1 | ▲ 12.3 |

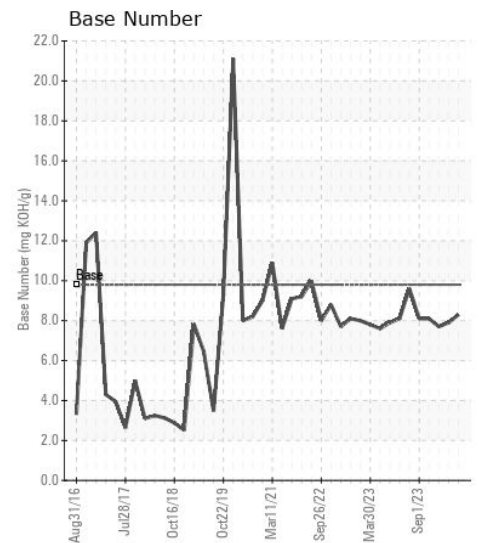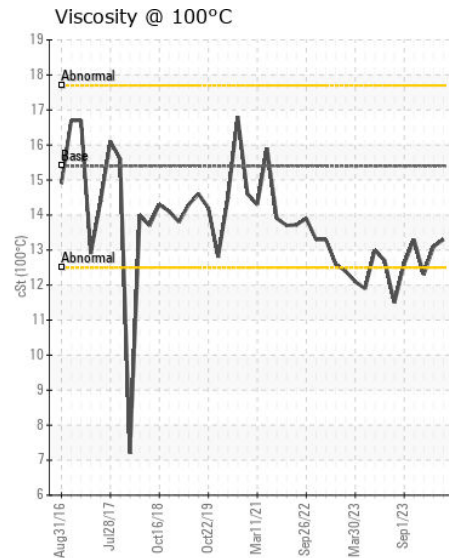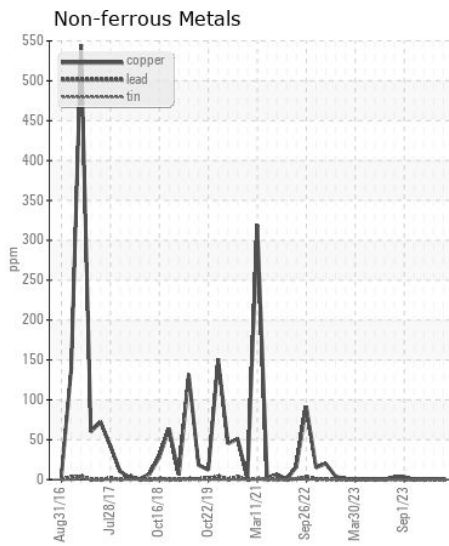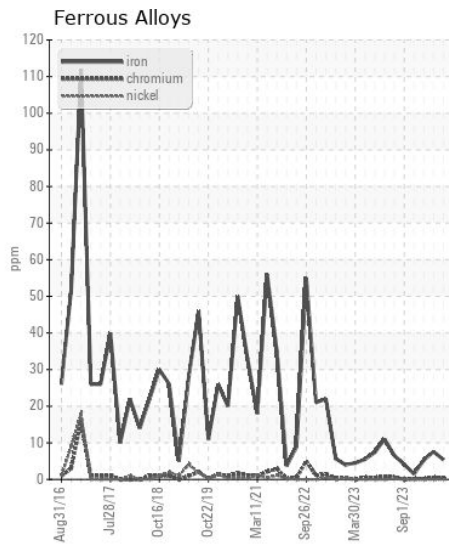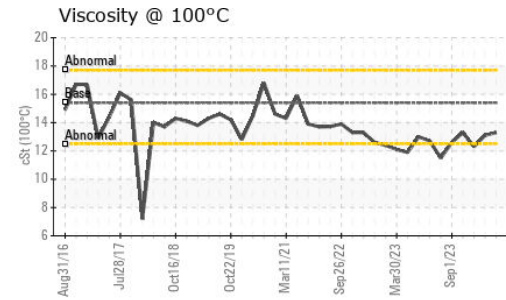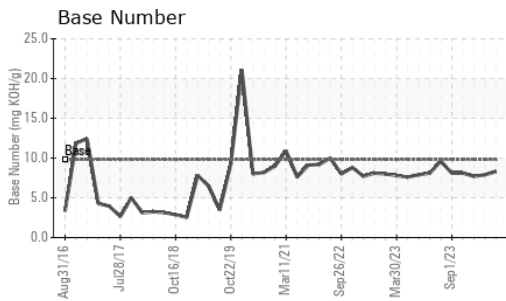

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109861 **Received** : 18 Jan 2024
Lab Number : 06064082 **Diagnosed** : 19 Jan 2024
Unique Number : 10835464 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: