



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 310E 1DW310EXKMF711885
Component
Hydraulic System
Fluid
JOHN DEERE HYDRAU (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0200212	JR0166017	JR0153224
Sample Date		Client Info		16 Jan 2024	19 Jul 2023	07 Dec 2022
Machine Age	hrs	Client Info		3451	2986	2393
Oil Age	hrs	Client Info		0	2986	0
Filter Age	hrs	Client Info		0	2986	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	16	6	10
Iron	ppm	ASTM D5185m	>71	0	4	4
Chromium	ppm	ASTM D5185m	>11	<1	4	4
Nickel	ppm	ASTM D5185m	>6	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>11	1	0	<1
Lead	ppm	ASTM D5185m	>13	0	<1	<1
Copper	ppm	ASTM D5185m	>21	<1	2	2
Tin	ppm	ASTM D5185m	>5	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION















The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>24	3	3	2
Potassium	ppm	ASTM D5185m	>20	7	4	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	3689	33145	41110
Particles >6µm		ASTM D7647	>5000	1024	495	1161
Particles >14µm		ASTM D7647	>640	78	41	66
Particles >21µm		ASTM D7647	>160	19	10	11
Particles >38µm		ASTM D7647	>40	6	1	1
Particles >71µm		ASTM D7647	>10	5	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	19/17/13	22/16/13	23/17/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	0	2
Boron	ppm	ASTM D5185m		<1	<1	2
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		0	1	2
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		6	5	4
Calcium	ppm	ASTM D5185m	87	308	322	313
Phosphorus	ppm	ASTM D5185m	727	638	632	576
Zinc	ppm	ASTM D5185m	900	944	840	761
Sulfur	ppm	ASTM D5185m	1500	1790	1795	1668
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.77	0.77	0.74
Visc @ 40°C	cSt	ASTM D445	65	60.5	58.1	58.1

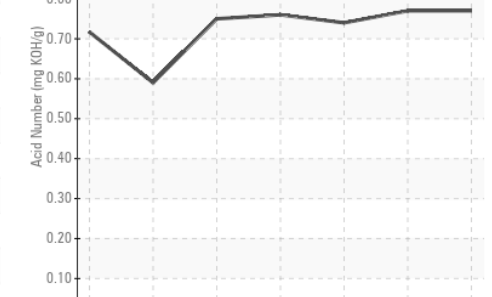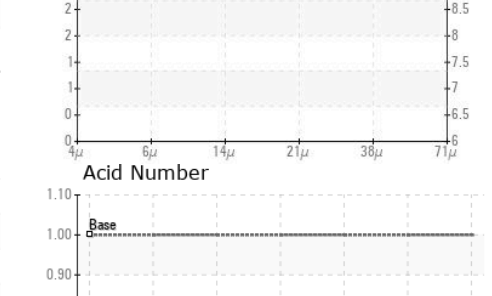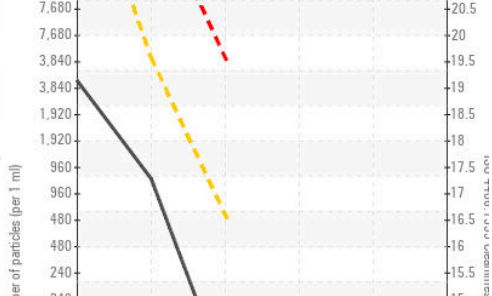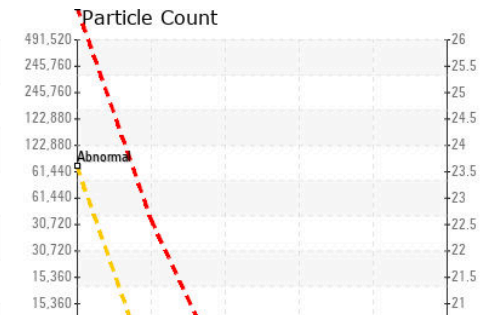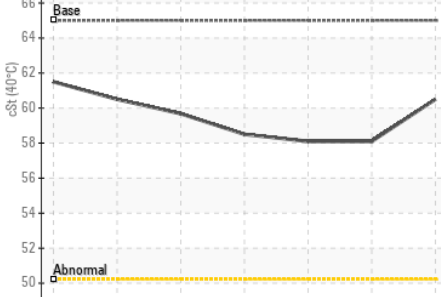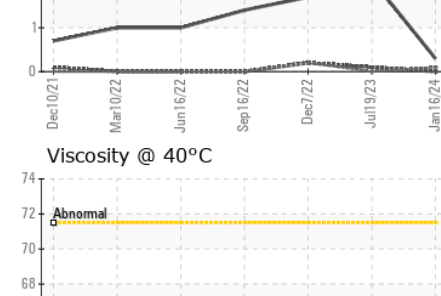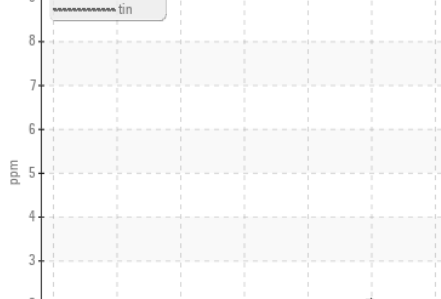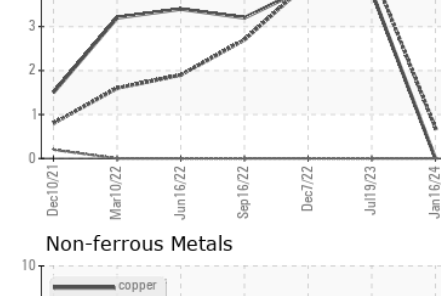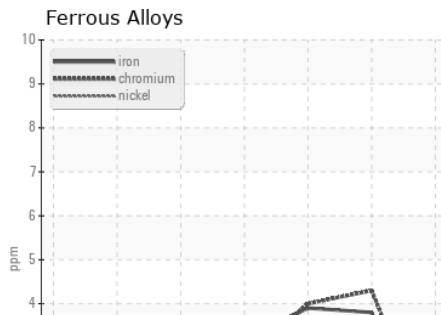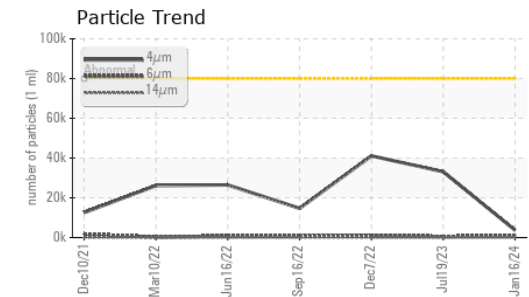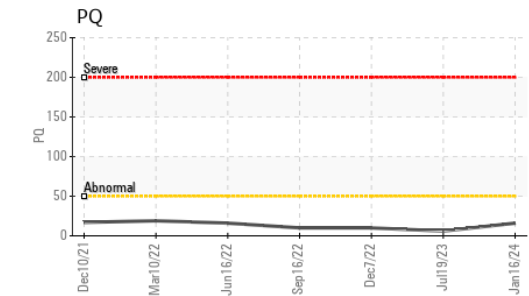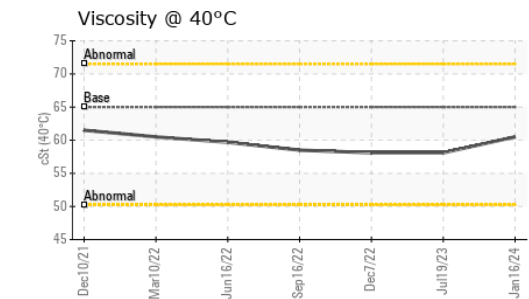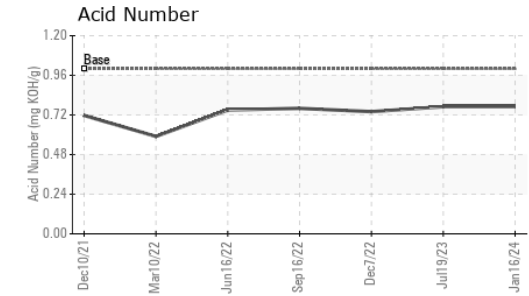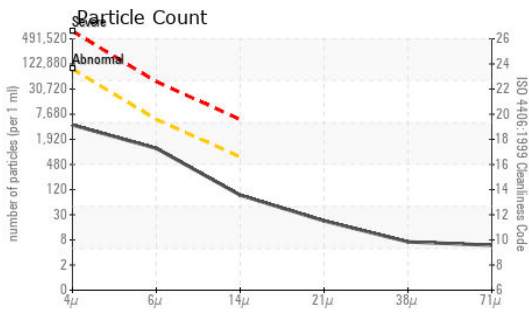

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200212 **Received** : 18 Jan 2024
Lab Number : 06064192 **Diagnosed** : 19 Jan 2024
Unique Number : 10835574 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)