



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[AMG]
 Machine Id
SENNEBOGEN 830 830.0.3462
 Component
Hydraulic System
 Fluid
SENNEBOGEN HO46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP407078	---	---
Sample Date		Client Info		07 Dec 2023	---	---
Machine Age	hrs	Client Info		1441	---	---
Oil Age	hrs	Client Info		1441	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	3	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	1299	---	---
Particles >6µm		ASTM D7647	>1300	384	---	---
Particles >14µm		ASTM D7647	>160	30	---	---
Particles >21µm		ASTM D7647	>40	8	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/16/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		5	---	---
Calcium	ppm	ASTM D5185m		1195	---	---
Phosphorus	ppm	ASTM D5185m		583	---	---
Zinc	ppm	ASTM D5185m		696	---	---
Sulfur	ppm	ASTM D5185m		4094	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.07	---	---
Visc @ 40°C	cSt	ASTM D445		35.6	---	---

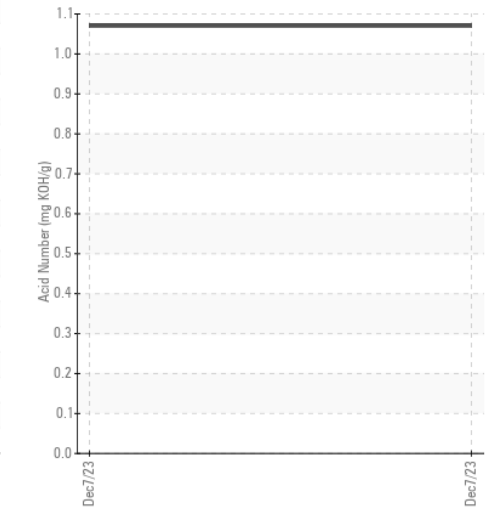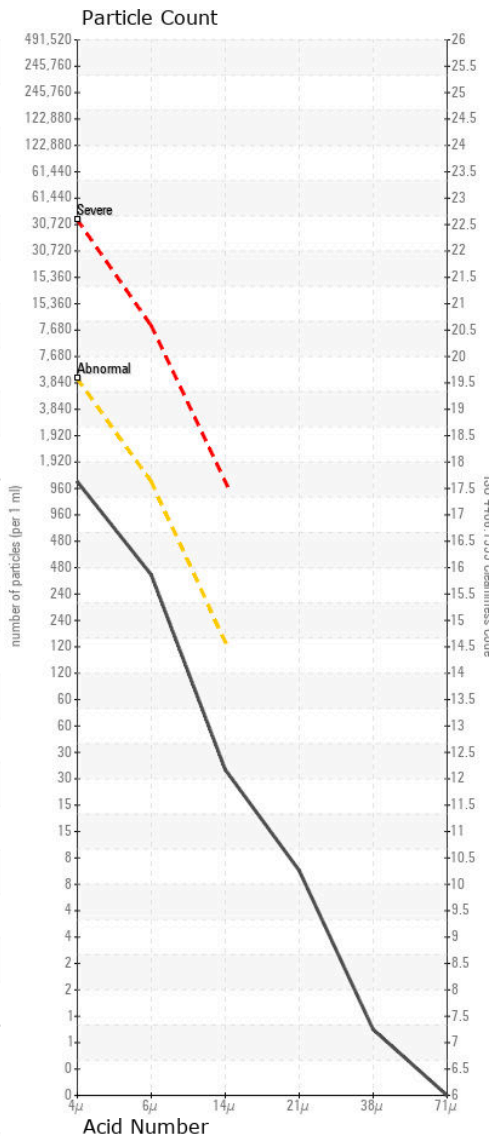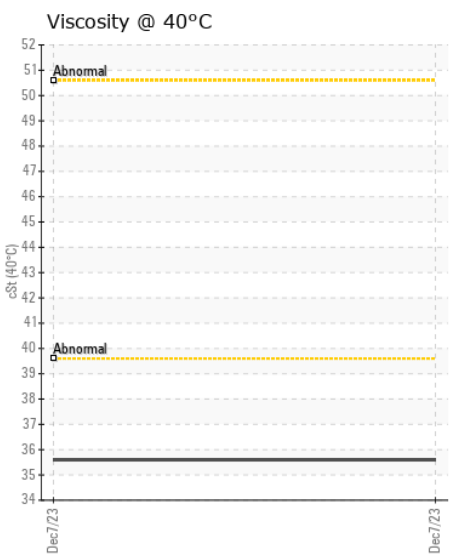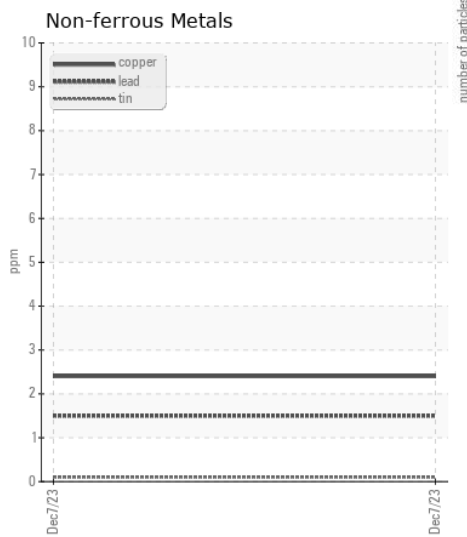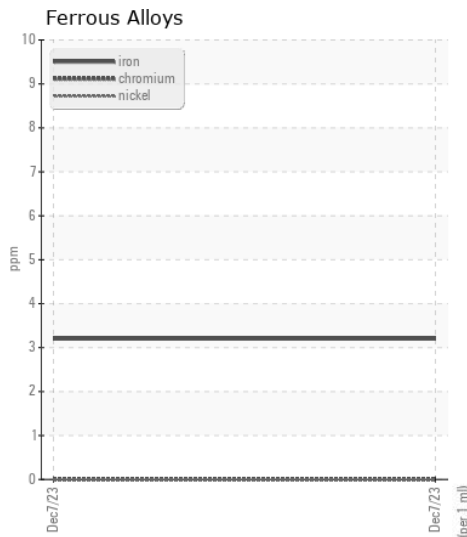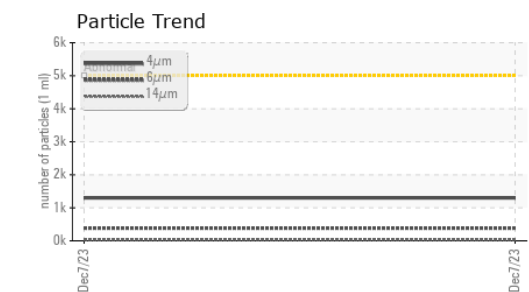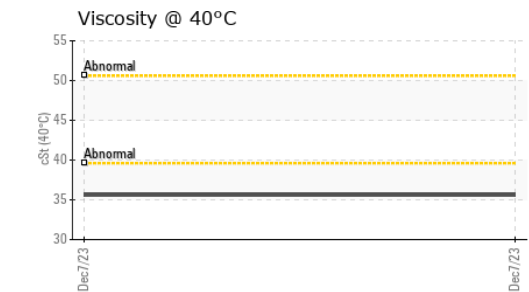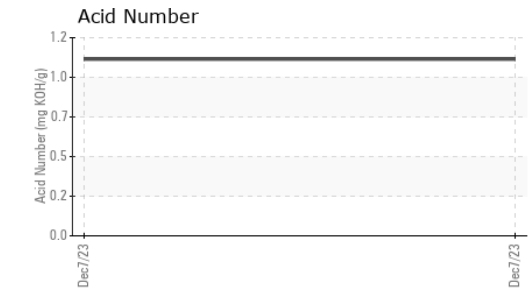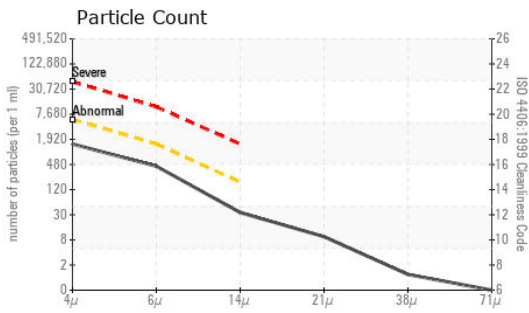

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP407078 **Received** : 18 Jan 2024
Lab Number : 06064236 **Diagnosed** : 22 Jan 2024
Unique Number : 10835618 **Diagnostician** : Doug Bogart
Test Package : MOB 2

GREEN MACHINE SERVICES LLC
 13 SPYROS DRIVE
 SOUTH AMBOY, NJ
 US 08879
 Contact: JOE GRZANKOWSKI
 JOE@GREENMSRV.COM
 T: (732)673-5920
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)