



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JLG 400S PL6304 (S/N 0300116304)

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0004139	HPL0000484	---
Sample Date		Client Info		15 Jan 2024	13 Apr 2022	---
Machine Age	hrs	Client Info		1919	1444	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	25	29	---
Chromium	ppm	ASTM D5185m	>20	2	3	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	8	8	---
Lead	ppm	ASTM D5185m	>40	2	2	---
Copper	ppm	ASTM D5185m	>330	6	8	---
Tin	ppm	ASTM D5185m	>15	1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	16	---
Potassium	ppm	ASTM D5185m	>20	3	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	2	---
Nitration	Abs/cm	*ASTM D7624	>20	11.9	9.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	33.9	24.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	10	---
Boron	ppm	ASTM D5185m	250	72	208	---
Barium	ppm	ASTM D5185m	10	<1	0	---
Molybdenum	ppm	ASTM D5185m	100	570	547	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	851	598	---
Calcium	ppm	ASTM D5185m	3000	3286	4174	---
Phosphorus	ppm	ASTM D5185m	1150	1062	1002	---
Zinc	ppm	ASTM D5185m	1350	1315	1147	---
Sulfur	ppm	ASTM D5185m	4250	12169	14911	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	32.7	17.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	14.05	13.8	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	14.4	---

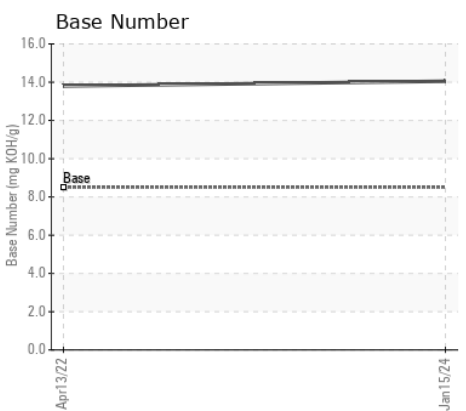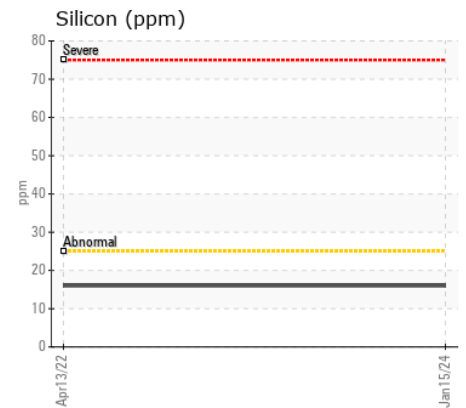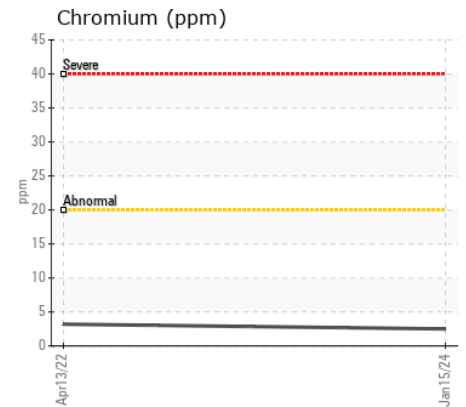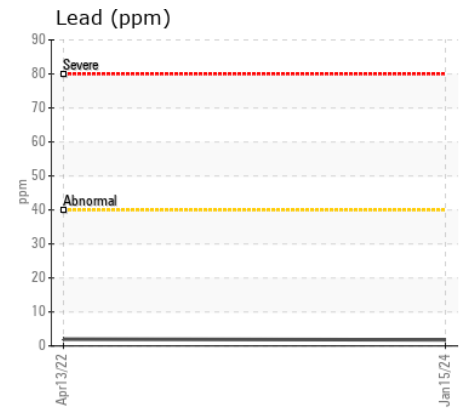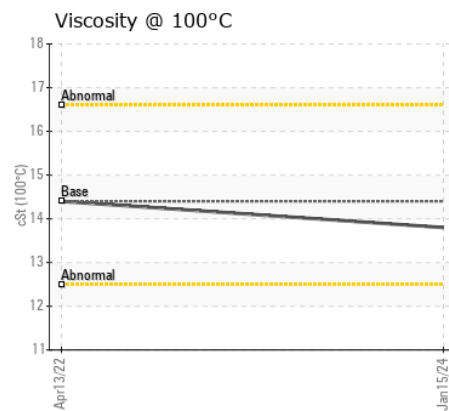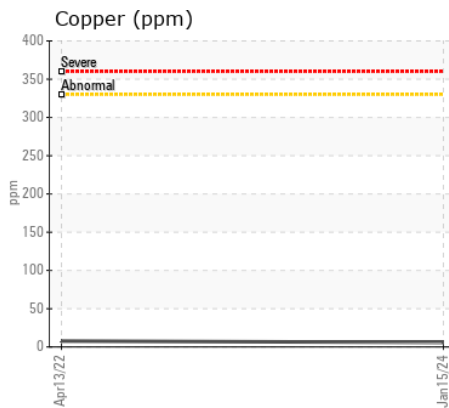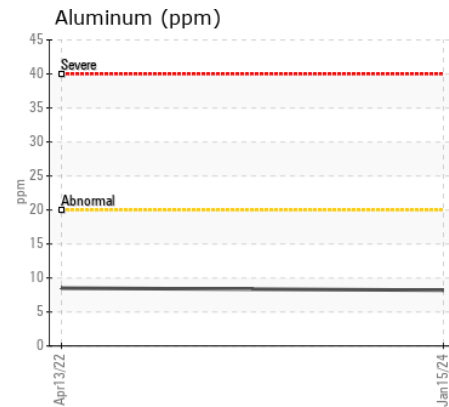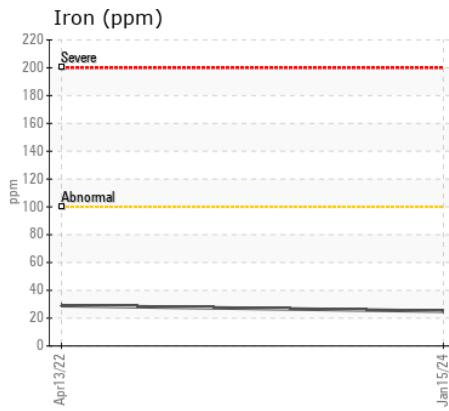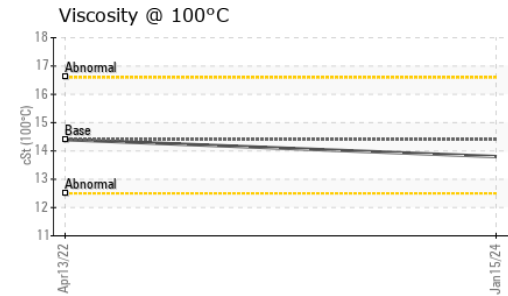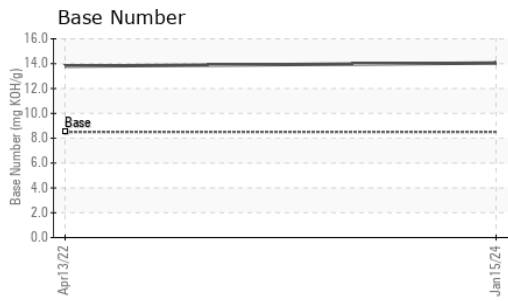

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0004139 **Received** : 18 Jan 2024
Lab Number : 06064488 **Diagnosed** : 21 Jan 2024
Unique Number : 10835870 **Diagnostician** : Don Baldrige
Test Package : MOB 2

STEVENS ON CRANE
 410 STEVENSON DR
 BOLINGBROOK, IL
 US 60440
 Contact: DAVE KOEHNE
 davidk@stevensoncrane.com
 T: (630)972-9199
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)