



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
JOHN DEERE 750K 1T0750KXHFK363027
Component
Left Outer Final Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0198709 | JR0188667 | JR0171200 |
| Sample Date | | Client Info | | 15 Jan 2024 | 29 Sep 2023 | 19 Jun 2023 |
| Machine Age | hrs | Client Info | | 6578 | 6002 | 5489 |
| Oil Age | hrs | Client Info | | 576 | 5057 | 4544 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Not Changed | Changed | Not Changed |
| Filter Changed | | Client Info | | N/A | N/A | Not Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|-------|--------------|------|------|
| PQ | | ASTM D8184 | >1250 | 9 | 25 | 34 |
| Iron | ppm | ASTM D5185m | >750 | 34 | 38 | 50 |
| Chromium | ppm | ASTM D5185m | >9 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >40 | 1 | 3 | 11 |
| Lead | ppm | ASTM D5185m | >15 | <1 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >40 | 0 | 0 | <1 |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|--------|-------------|--------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >75 | 8 | 12 | 26 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | <1 | 1 |
| Water | | WC Method | >0.075 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | LIGHT |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | NEG | NEG |

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >51 | <1 | 2 | 2 |
| Boron | ppm | ASTM D5185m | 6 | 3 | 3 | <1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 145 | 107 | 111 | 101 |
| Calcium | ppm | ASTM D5185m | 3570 | 3338 | 3598 | 3466 |
| Phosphorus | ppm | ASTM D5185m | 1290 | 1070 | 1054 | 967 |
| Zinc | ppm | ASTM D5185m | 1640 | 1288 | 1304 | 1217 |
| Sulfur | ppm | ASTM D5185m | | 4132 | 3733 | 3965 |
| Visc @ 40°C | cSt | ASTM D445 | 57.0 | 58.3 | 53.9 | 55.0 |


Viscosity @ 40°C

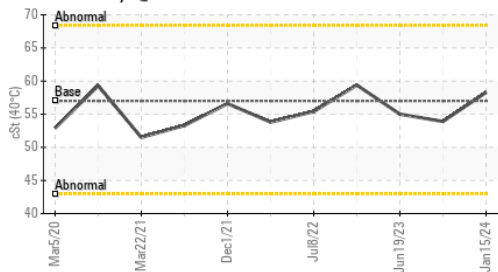


PQ

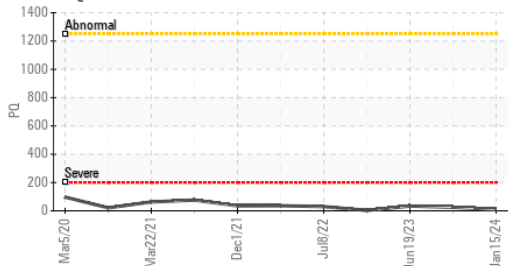


Ferrous Alloys

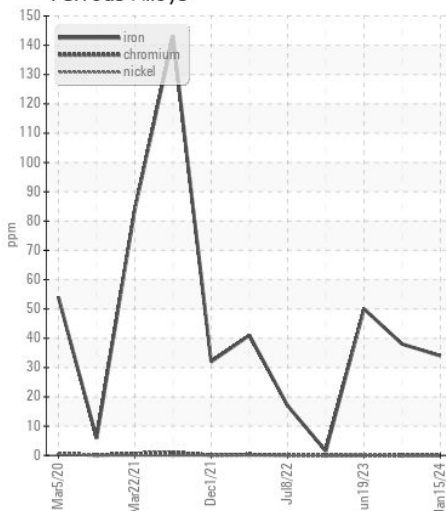


Non-ferrous Metals

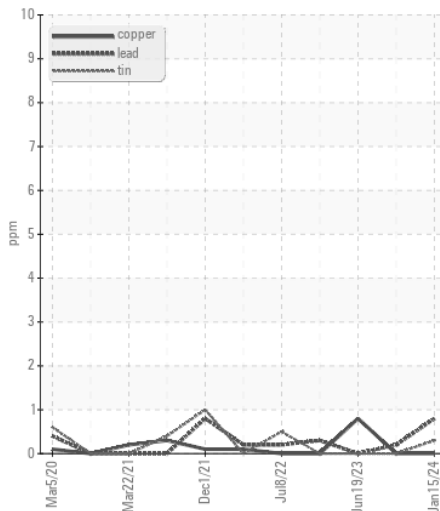

PQ

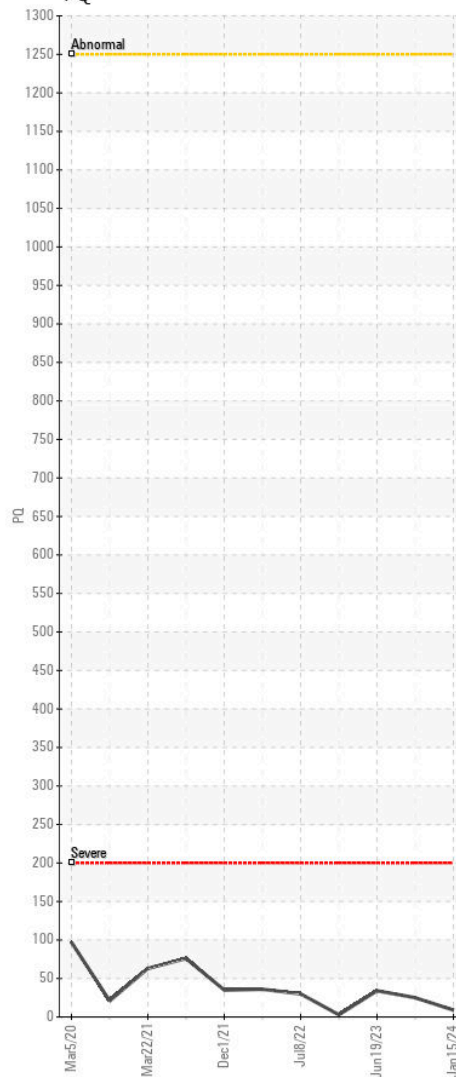

Viscosity @ 40°C

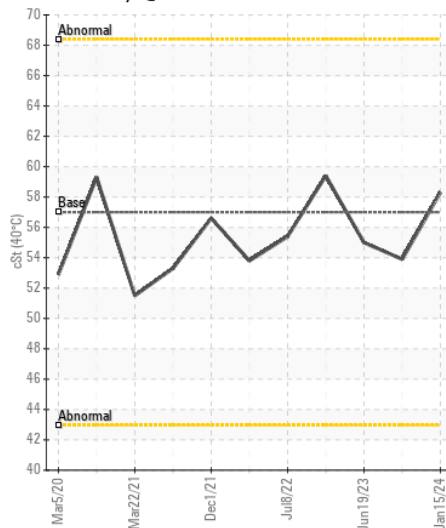

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0198709 **Received** : 18 Jan 2024
Lab Number : 06064526 **Diagnosed** : 19 Jan 2024
Unique Number : 10835908 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)