



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W63109]
 Machine Id
JOHN DEERE 210G 1FF210GXHJF526691
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W63109)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0198658	JR0178701	JR0161973
Sample Date		Client Info		16 Jan 2024	17 Aug 2023	28 Apr 2023
Machine Age	hrs	Client Info		3539	2989	2639
Oil Age	hrs	Client Info		2859	2793	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	26	18	75
Iron	ppm	ASTM D5185m	>750	15	1	130
Chromium	ppm	ASTM D5185m	>9	0	0	2
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	0	<1	10
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	0	0	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	1	<1	20
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	1	1
Boron	ppm	ASTM D5185m		2	1	12
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	2
Magnesium	ppm	ASTM D5185m		3	0	2
Calcium	ppm	ASTM D5185m		99	5	15
Phosphorus	ppm	ASTM D5185m		755	1665	448
Zinc	ppm	ASTM D5185m		18	0	12
Sulfur	ppm	ASTM D5185m		23388	31456	25106
Visc @ 40°C	cSt	ASTM D445		166	241	141

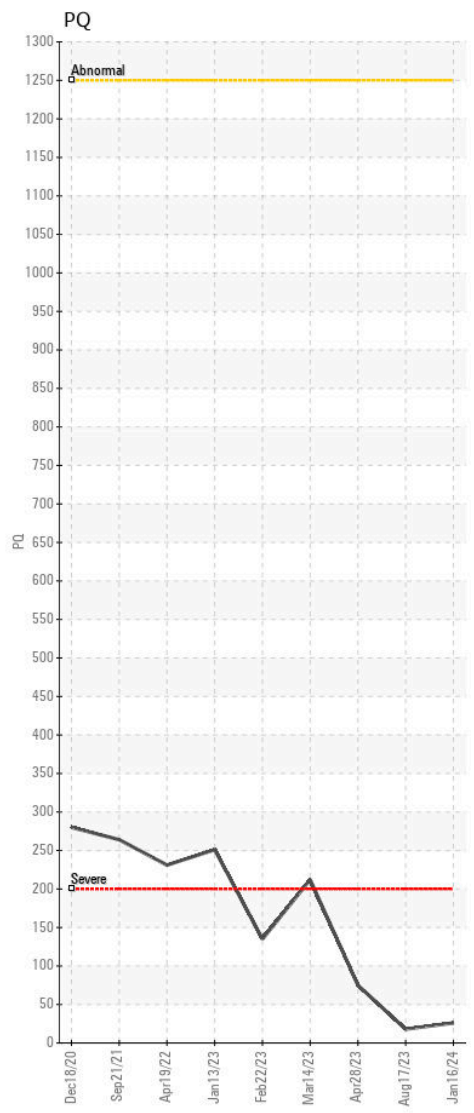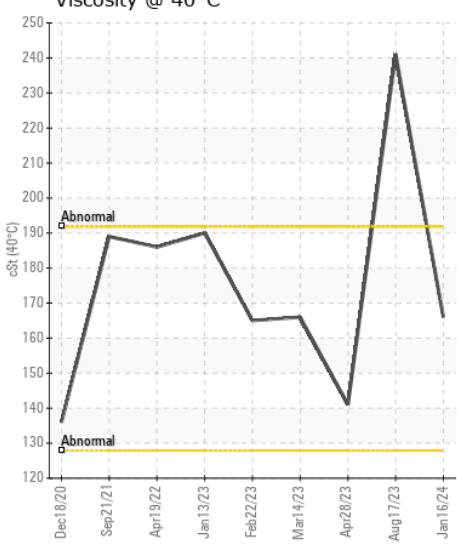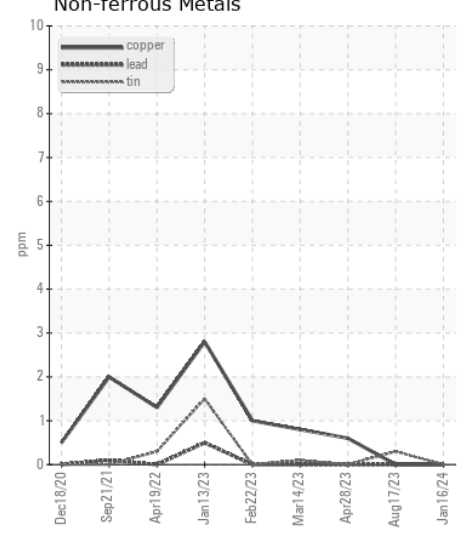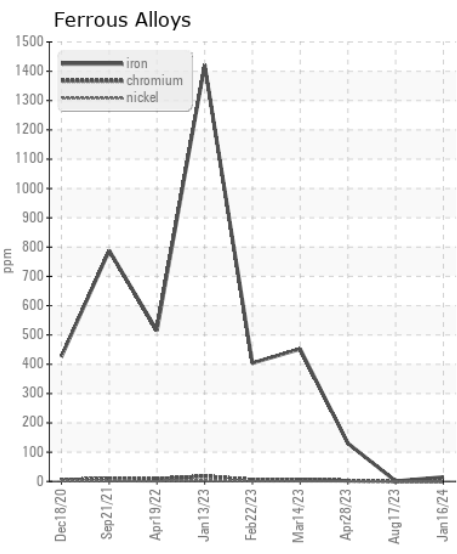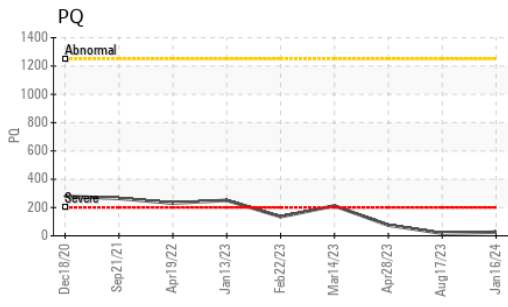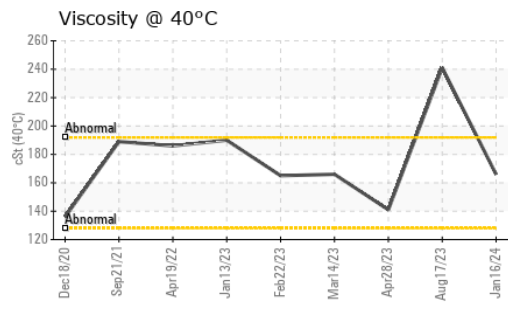

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0198658 **Received** : 18 Jan 2024
Lab Number : 06064531 **Diagnosed** : 21 Jan 2024
Unique Number : 10835913 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)