



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 2 - Beaver [RO#146830]
Machine Id
JOHN DEERE 1050K 1T01050PEJF332204
Component
Left Outer Final Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0046928	LEC0041465	---
Sample Date		Client Info		12 Jan 2024	14 Jun 2023	---
Machine Age	hrs	Client Info		815	210	---
Oil Age	hrs	Client Info		815	210	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	43	23	---
Iron	ppm	ASTM D5185m	>750	18	30	---
Chromium	ppm	ASTM D5185m	>9	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	2	<1	---
Lead	ppm	ASTM D5185m	>15	0	0	---
Copper	ppm	ASTM D5185m	>40	1	<1	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	3	6	---
Potassium	ppm	ASTM D5185m	>20	15	10	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	3	---
Boron	ppm	ASTM D5185m	6	0	<1	---
Barium	ppm	ASTM D5185m	0	3	0	---
Molybdenum	ppm	ASTM D5185m	0	0	<1	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	145	103	108	---
Calcium	ppm	ASTM D5185m	3570	3326	3595	---
Phosphorus	ppm	ASTM D5185m	1290	977	1041	---
Zinc	ppm	ASTM D5185m	1640	1263	1311	---
Sulfur	ppm	ASTM D5185m		3793	4531	---
Visc @ 40°C	cSt	ASTM D445	57.0	58.1	58.1	---

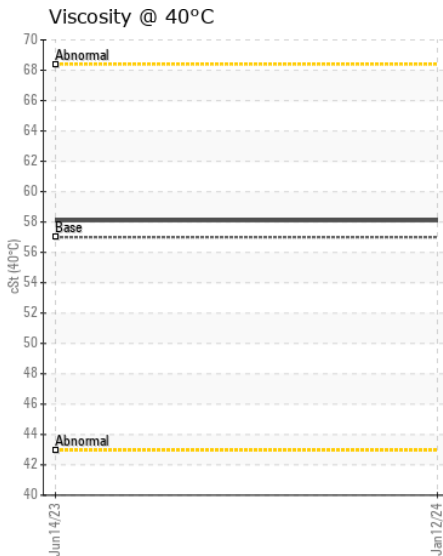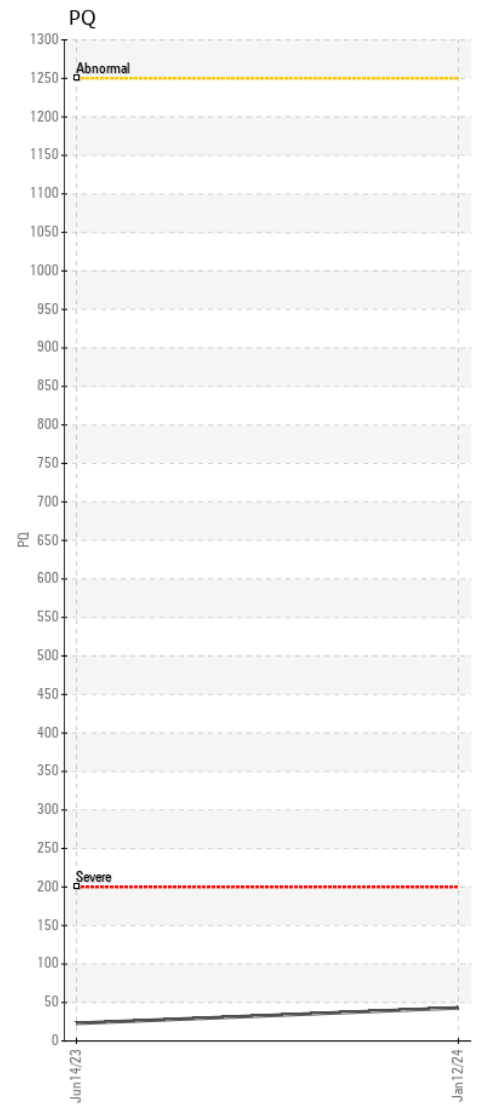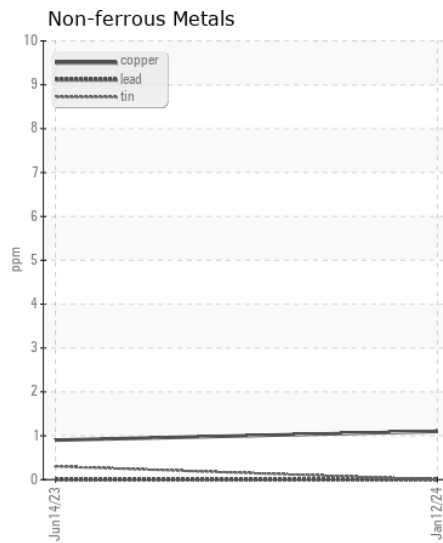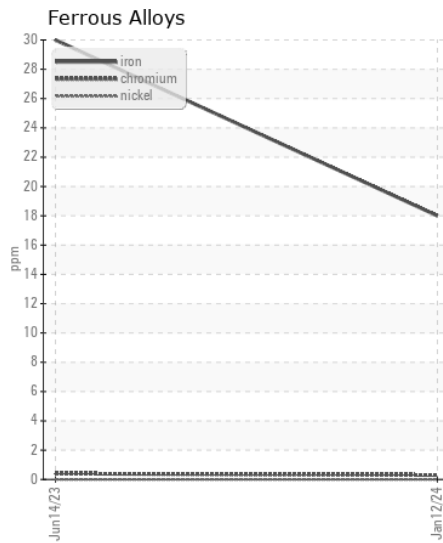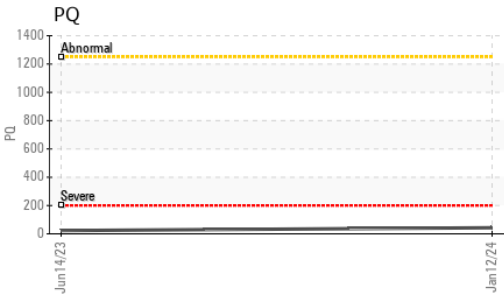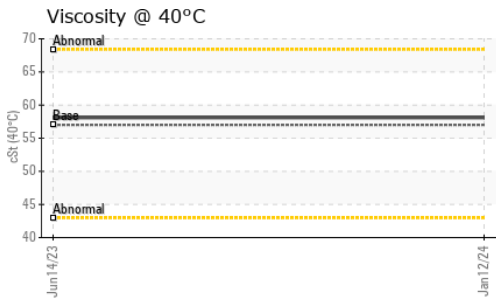

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0046928 **Recieved** : 18 Jan 2024
Lab Number : 06064579 **Diagnosed** : 19 Jan 2024
Unique Number : 10835961 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)