



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[659478]
Machine Id
VOLVO A40G 31517
Component
Front Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP438978	---	---
Sample Date		Client Info		11 Jan 2024	---	---
Machine Age	hrs	Client Info		2059	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	59	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>150	1	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>50	2	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	111	▲ 320	---	---
Barium	ppm	ASTM D5185m	0.0	3	---	---
Molybdenum	ppm	ASTM D5185m	0.9	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	3	---	---
Magnesium	ppm	ASTM D5185m	39	0	---	---
Calcium	ppm	ASTM D5185m	93	▲ 8	---	---
Phosphorus	ppm	ASTM D5185m	920	▲ 2268	---	---
Zinc	ppm	ASTM D5185m	104	▲ 0	---	---
Sulfur	ppm	ASTM D5185m	20179	▲ 31301	---	---
Visc @ 40°C	cSt	ASTM D445	333	▲ 52.8	---	---


▲ Viscosity @ 40°C

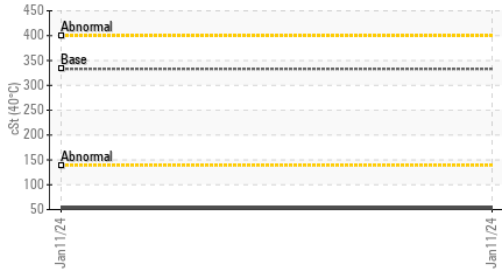


▲ Additives




Iron (ppm)

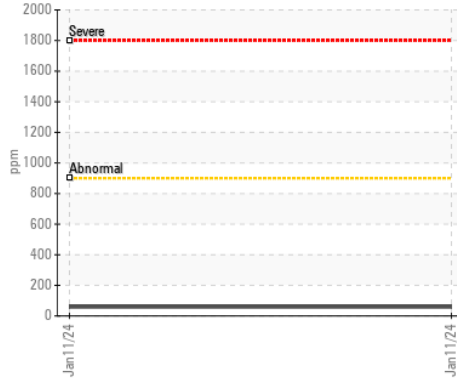


Aluminum (ppm)

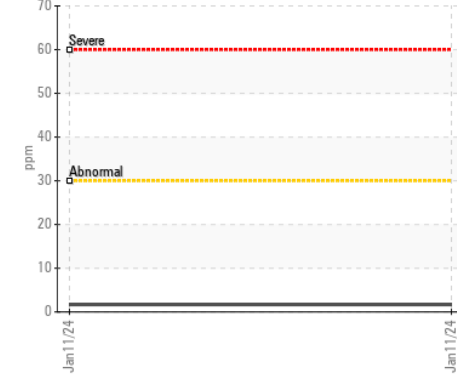


Copper (ppm)

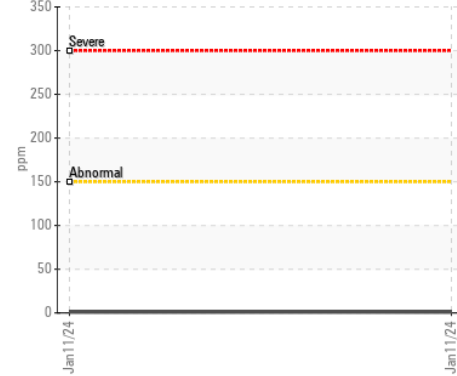


▲ Viscosity @ 40°C

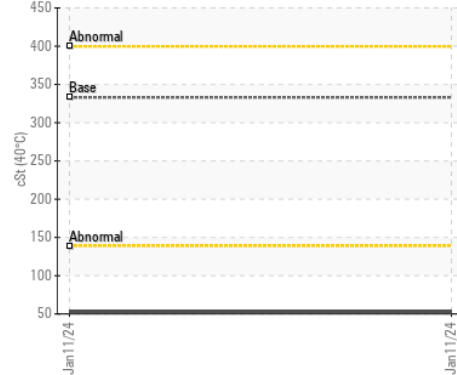


Lead (ppm)

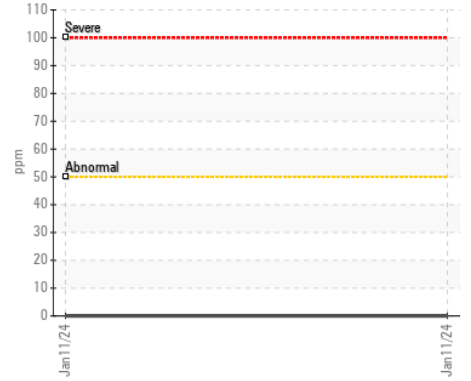


Chromium (ppm)

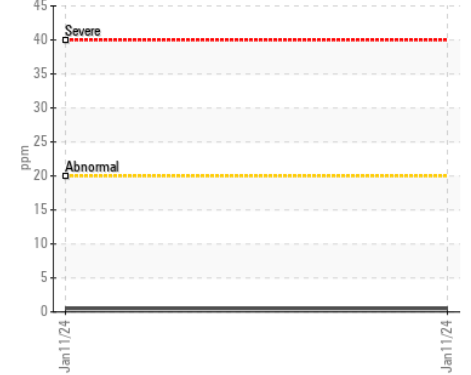

Silicon (ppm)

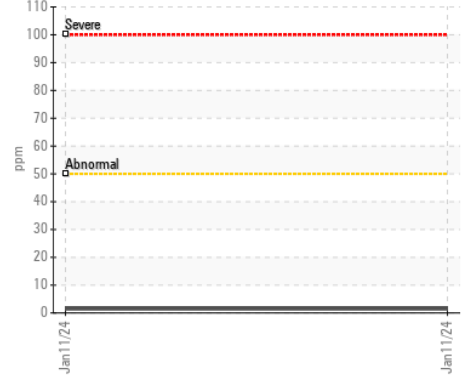

▲ Additives

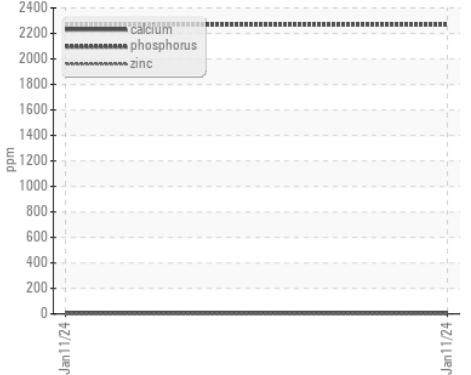

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP438978 Recieved : 18 Jan 2024
 Lab Number : 06064612 Diagnosed : 21 Jan 2024
 Unique Number : 10835994 Diagnostician : Don Baldrige
 Test Package : MOB 1

JON M HALL COMPANY
 1920 BOOTHE CIRCLE SUITE 110
 LONGWOOD, FL
 US 32750
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (407)215-0410

F: