



OIL ANALYSIS REPORT

| | |
|-----------------|-----------------|
| WEAR | NORMAL |
| CONTAMINATION | MARGINAL |
| FLUID CONDITION | NORMAL |

Machine Id
6387
Component
Diesel Engine
Fluid
CASTROL VECTON 15W40 CK4 (26 QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | WC0813387 | WC0813365 | WC0813352 |
| Sample Date | | Client Info | | 17 Jan 2024 | 16 Jan 2024 | 16 Oct 2023 |
| Machine Age | hrs | Client Info | | 6005 | 5367 | 5737 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | MARGINAL | NORMAL | ABNORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 4 | 2 | 7 |
| Chromium | ppm | ASTM D5185m | >20 | 0 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | <1 | <1 | 3 |
| Lead | ppm | ASTM D5185m | >40 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >330 | <1 | <1 | 1 |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION








Light fuel dilution occurring. No other contaminants were detected in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|--------------|-------|--------------|
| Silicon | ppm | ASTM D5185m | >25 | 4 | 4 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | 1 | <1 | 2 |
| Fuel | % | ASTM D3524 | >5 | ▲ 4.8 | <1.0 | ▲ 6.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.2 | 0.2 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.9 | 9.3 | 10.8 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.0 | 19.5 | 20.5 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|---------------|
| Sodium | ppm | ASTM D5185m | | 3 | 2 | <1 |
| Boron | ppm | ASTM D5185m | | 27 | 33 | 26 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 10 |
| Molybdenum | ppm | ASTM D5185m | | 44 | 43 | 46 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | | 527 | 527 | 473 |
| Calcium | ppm | ASTM D5185m | | 1467 | 1479 | 1385 |
| Phosphorus | ppm | ASTM D5185m | | 726 | 765 | 698 |
| Zinc | ppm | ASTM D5185m | | 881 | 883 | 843 |
| Sulfur | ppm | ASTM D5185m | | 2185 | 2191 | 2207 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 17.7 | 16.9 | 18.4 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 10 | 7.3 | 7.7 | 6.7 |
| Visc @ 100°C | cSt | ASTM D445 | 15.5 | 12.4 | 12.3 | ▲ 12.2 |

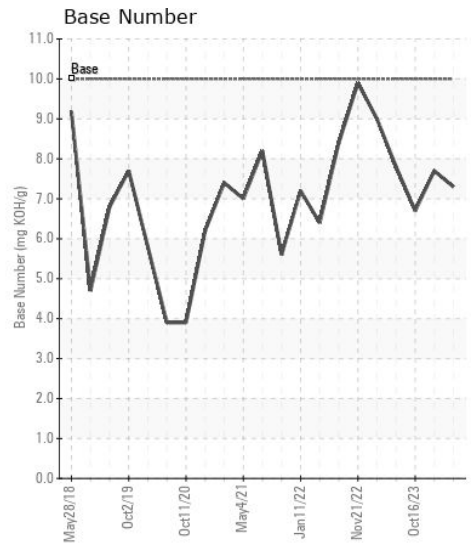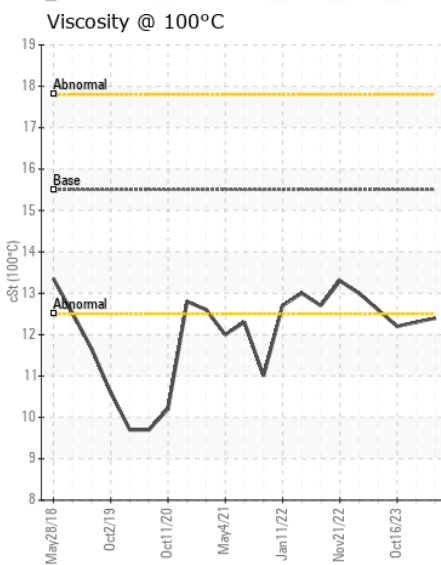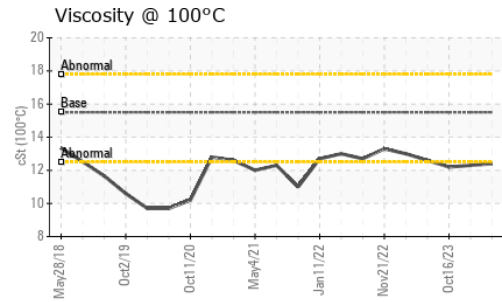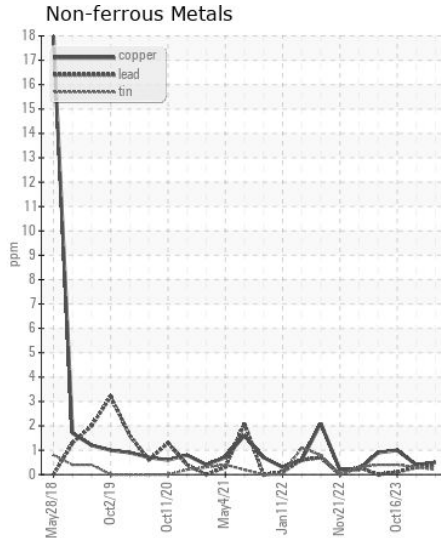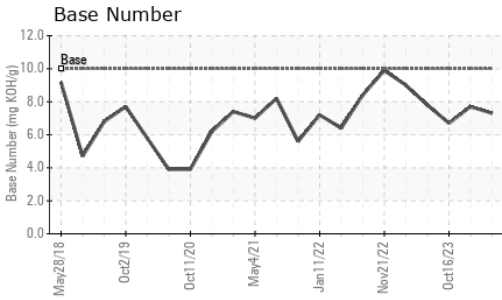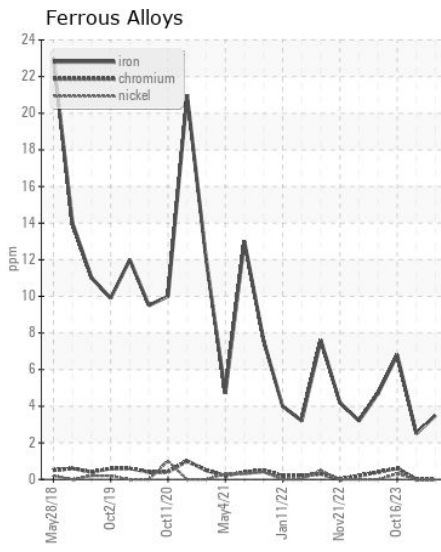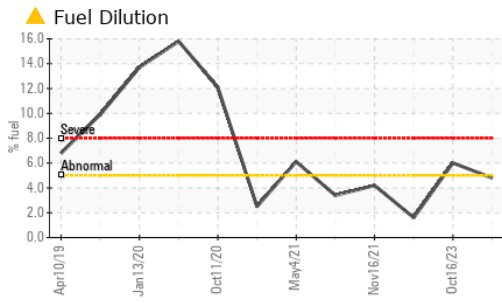

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0813387 **Received** : 18 Jan 2024
Lab Number : 06064694 **Diagnosed** : 23 Jan 2024
Unique Number : 10836076 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

CITY OF BERKELEY
 1199 SECOND ST
 BERKELEY, CA
 US 94710
 Contact: BAL JOHAL
 bjoahal@ci.berkeley.ca.us
 T: (510)981-6375
 F: (510)558-1330

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)