



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2109
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 5W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0876668	WC0686104	WC0604082
Sample Date		Client Info		06 Jan 2024	21 Aug 2022	01 Sep 2021
Machine Age	mls	Client Info		460216	324001	342463
Oil Age	mls	Client Info		50000	100000	100000
Filter Age	mls	Client Info		50000	50000	100000
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	50	18	48
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	13	1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	4	2	3
Lead	ppm	ASTM D5185m	>40	<1	2	<1
Copper	ppm	ASTM D5185m	>330	9	7	6
Tin	ppm	ASTM D5185m	>15	2	1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	6	6
Potassium	ppm	ASTM D5185m	>20	5	0	6
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.9	0.8	0.6
Nitration	Abs/cm	*ASTM D7624	>20	12.0	12.3	17.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.9	26.1	31.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		10	2	6
Boron	ppm	ASTM D5185m	250	21	32	15
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	76	42	65
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m	450	830	723	1130
Calcium	ppm	ASTM D5185m	3000	1342	1426	999
Phosphorus	ppm	ASTM D5185m	1150	1125	909	1039
Zinc	ppm	ASTM D5185m	1350	1381	1188	1408
Sulfur	ppm	ASTM D5185m	4250	3066	2932	2620
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.3	24.1	39.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.3	7.6	2.5
Visc @ 100°C	cSt	ASTM D445	10.9	12.8	12.0	▲ 13.1

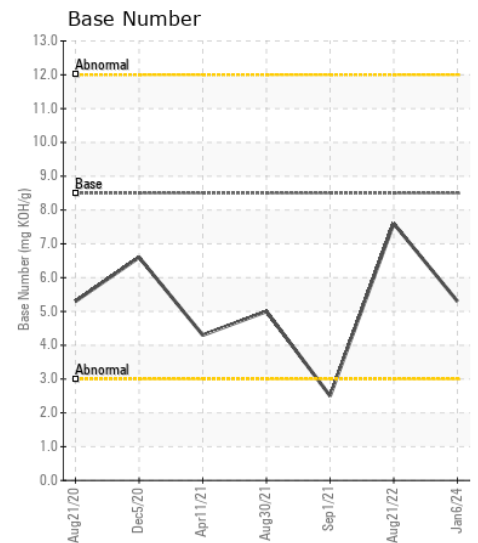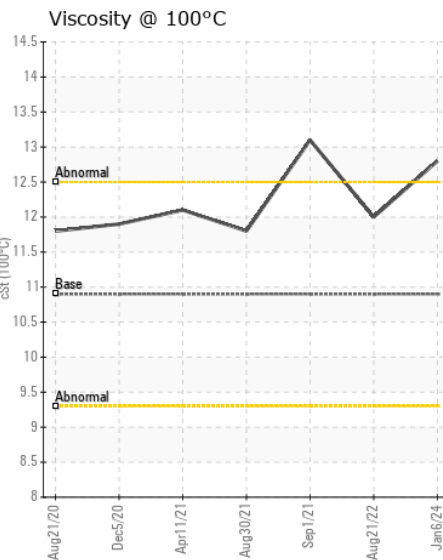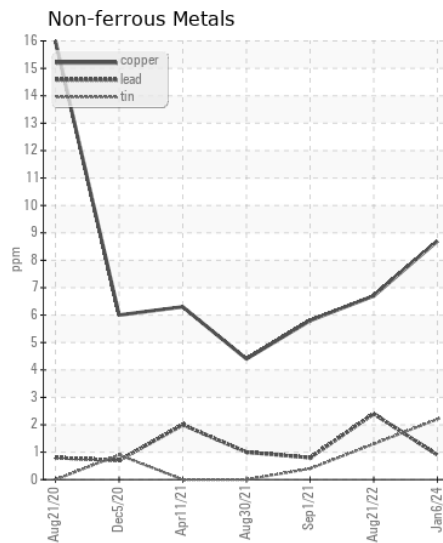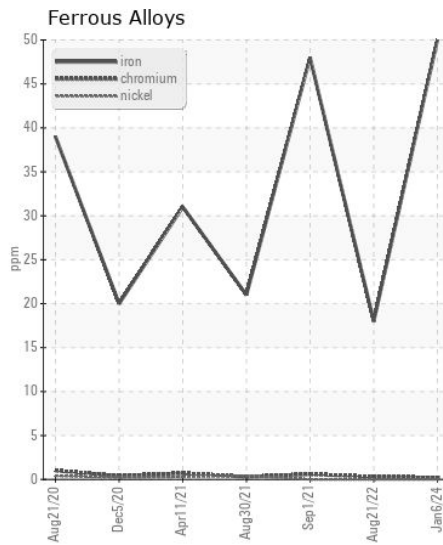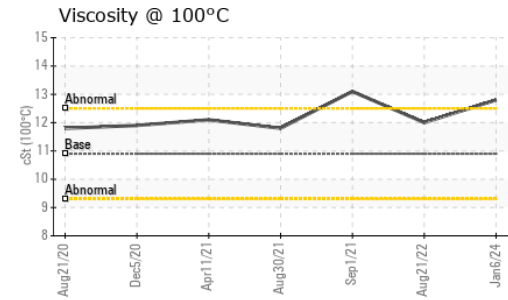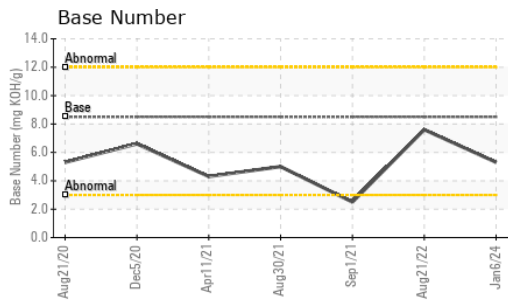

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876668 **Received** : 18 Jan 2024
Lab Number : 06064704 **Diagnosed** : 21 Jan 2024
Unique Number : 10836086 **Diagnostician** : Don Baldrige
Test Package : FLEET

MABE TRUCKING
 PO BOX 1081
 EDEN, NC
 US 27289

Contact: MAINTENANCE
 maintenancemanager@mabetrucking.com

T:
 F: (336)635-1791

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)