



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
59266
Component
Diesel Engine
Fluid
CHEV (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0819499	WC0795705	---
Sample Date		Client Info		10 Jan 2024	07 Sep 2023	---
Machine Age	mls	Client Info		24370	15757	---
Oil Age	mls	Client Info		8613	15757	---
Filter Age	mls	Client Info		0	15757	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	8	32	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	4	14	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	3	16	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	16	---
Potassium	ppm	ASTM D5185m	>20	16	56	---
Fuel		WC Method	>5	<1.0	0.4	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.4	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	6.2	7.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	20.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	---
Boron	ppm	ASTM D5185m		16	65	---
Barium	ppm	ASTM D5185m		0	1	---
Molybdenum	ppm	ASTM D5185m		72	65	---
Manganese	ppm	ASTM D5185m		<1	3	---
Magnesium	ppm	ASTM D5185m		947	475	---
Calcium	ppm	ASTM D5185m		1146	1637	---
Phosphorus	ppm	ASTM D5185m		1056	991	---
Zinc	ppm	ASTM D5185m		1238	1250	---
Sulfur	ppm	ASTM D5185m		3198	3430	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.7	8.6	---
Visc @ 100°C	cSt	ASTM D445		12.6	▲ 11.5	---

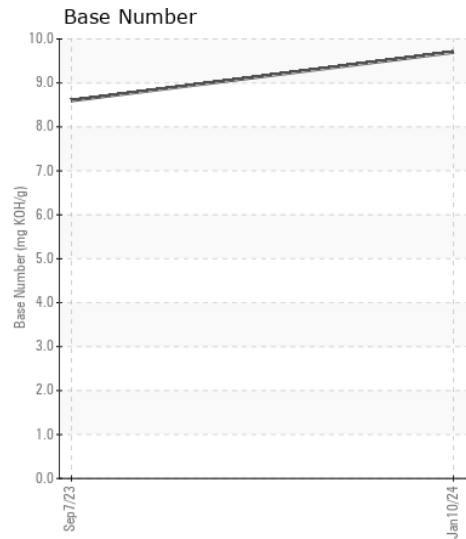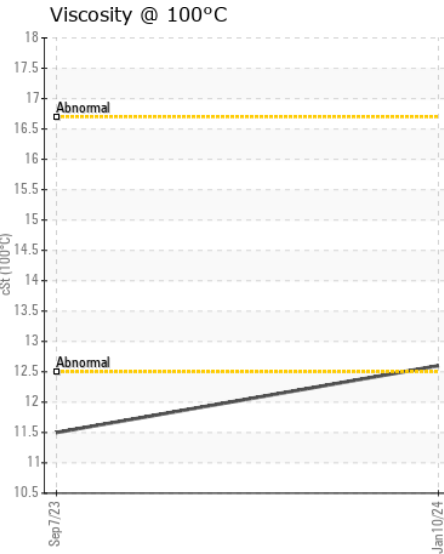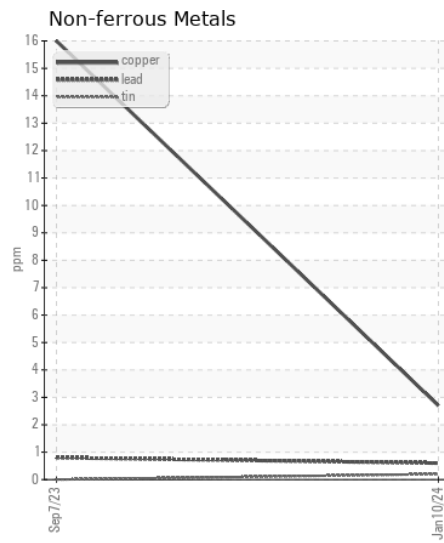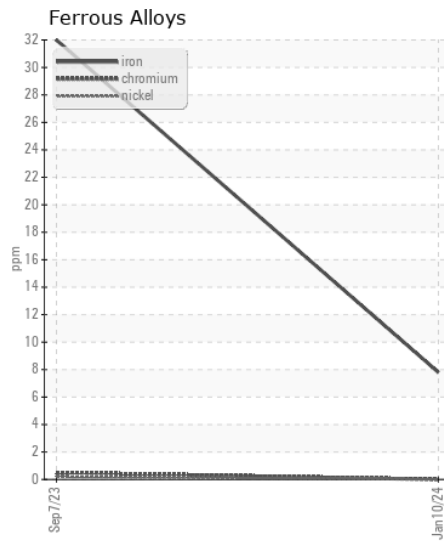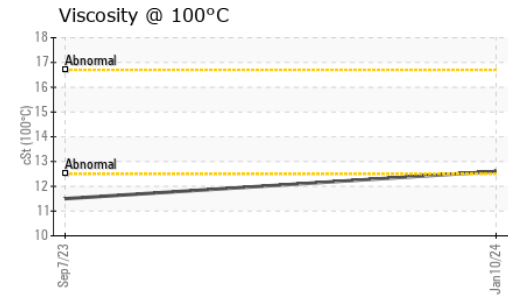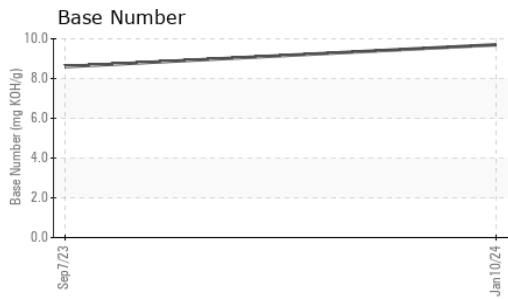

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0819499 **Received** : 18 Jan 2024
Lab Number : 06064735 **Diagnosed** : 19 Jan 2024
Unique Number : 10836117 **Diagnostician** : Wes Davis
Test Package : FLEET

SALEM NATIONALEASE CORPORATION
 198 PARK PLAZA DRIVE
 WINSTON SALEM, NC
 US 27105
 Contact: Audrey Hopkins
 Audrey.Hopkins@salemcorp.com
 T: (336)767-9642
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)