



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
6391
Component
Diesel Engine
Fluid
CASTROL VECTON 15W40 CK4 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0813360	WC0813340	WC0666186
Sample Date		Client Info		17 Jan 2024	15 Oct 2023	15 May 2023
Machine Age	hrs	Client Info		6848	7160	6586
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	7	7
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	2	2
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	5	5
Potassium	ppm	ASTM D5185m	>20	2	3	4
Fuel		WC Method	>5	<1.0	▲ 4.1	■ 9.1
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.9	9.9	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	19.6	20.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	4	2
Boron	ppm	ASTM D5185m		30	28	27
Barium	ppm	ASTM D5185m		0	3	0
Molybdenum	ppm	ASTM D5185m		45	45	45
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		530	475	519
Calcium	ppm	ASTM D5185m		1435	▲ 1444	1453
Phosphorus	ppm	ASTM D5185m		757	▲ 677	690
Zinc	ppm	ASTM D5185m		919	▲ 815	879
Sulfur	ppm	ASTM D5185m		2343	▲ 2054	2704
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.2	16.9	17.9
Base Number (BN)	mg KOH/g	ASTM D2896	10	7.5	7.2	6.4
Visc @ 100°C	cSt	ASTM D445	15.5	12.7	12.8	▲ 11.0

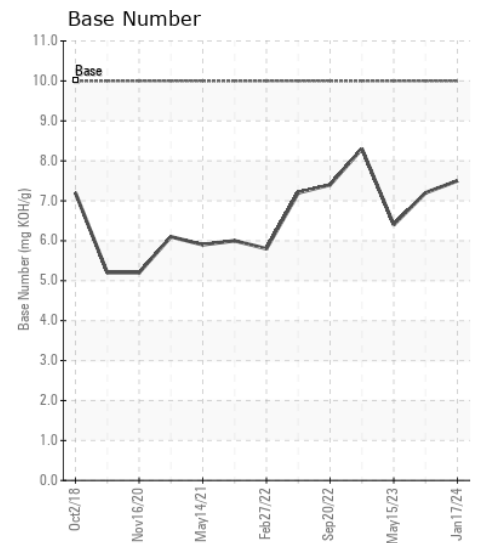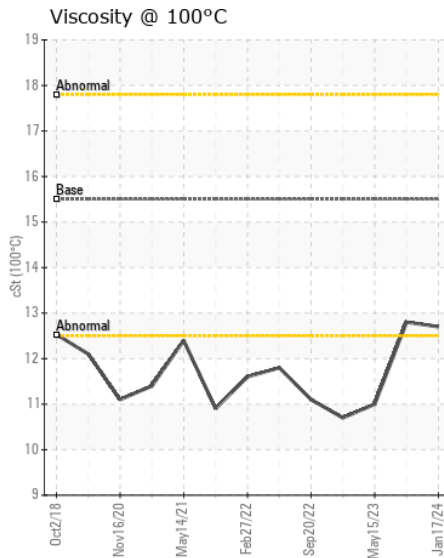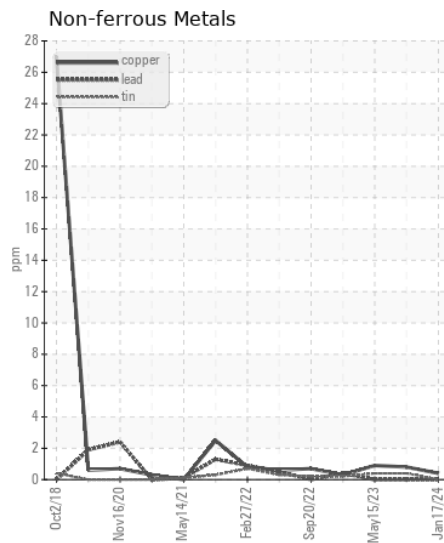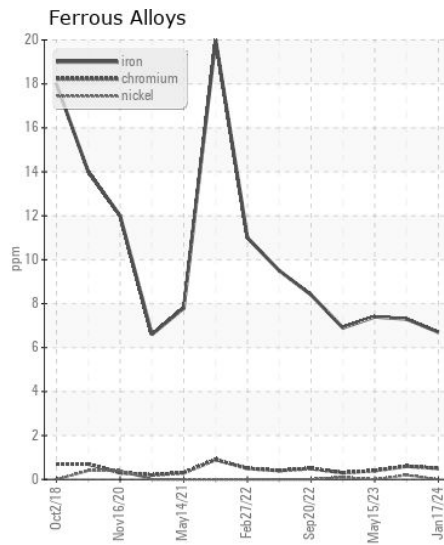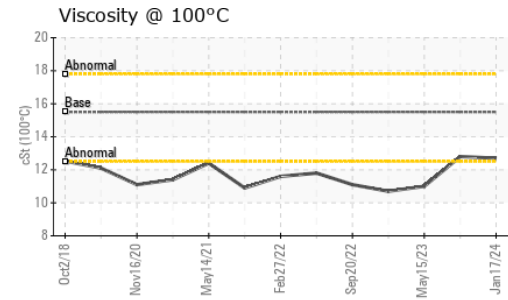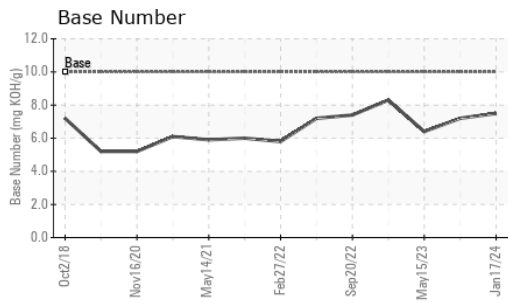

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0813360 **Received** : 18 Jan 2024
Lab Number : 06064751 **Diagnosed** : 21 Jan 2024
Unique Number : 10836133 **Diagnostician** : Don Baldridge
Test Package : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITY OF BERKELEY
 1199 SECOND ST
 BERKELEY, CA
 US 94710
 Contact: BAL JOHAL
 bjohal@ci.berkeley.ca.us
 T: (510)981-6375
 F: (510)558-1330