



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**6392**  
Component  
**Diesel Engine**  
Fluid  
**CASTROL VECTON 15W40 CK4 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0813394</b>	WC0666191	WC0666190
Sample Date		Client Info		<b>18 Jan 2024</b>	17 Jan 2024	14 May 2023
Machine Age	hrs	Client Info		<b>7360</b>	6789	6454
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>6</b>	3	6
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	9.0	10.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	19.4	20.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	3	4
Boron	ppm	ASTM D5185m		<b>34</b>	25	25
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>46</b>	41	47
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>558</b>	498	512
Calcium	ppm	ASTM D5185m		<b>1444</b>	1418	1528
Phosphorus	ppm	ASTM D5185m		<b>788</b>	727	674
Zinc	ppm	ASTM D5185m		<b>937</b>	858	892
Sulfur	ppm	ASTM D5185m		<b>2394</b>	2095	2467
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.3</b>	16.5	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>8.0</b>	7.7	6.4
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.1</b>	12.6	12.5

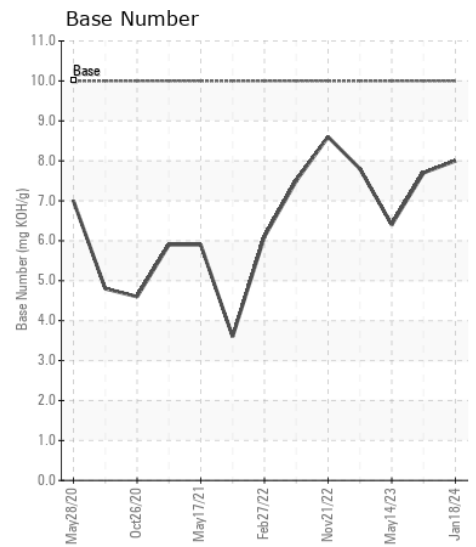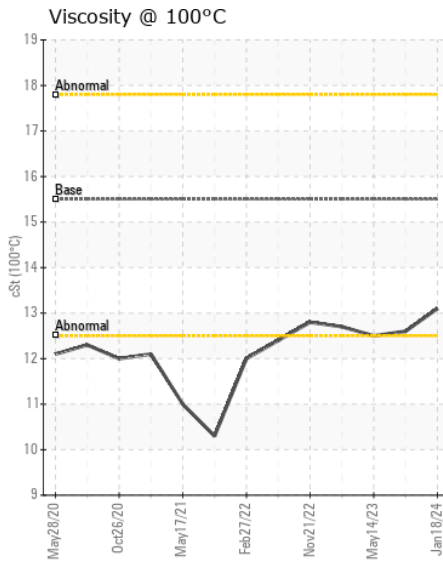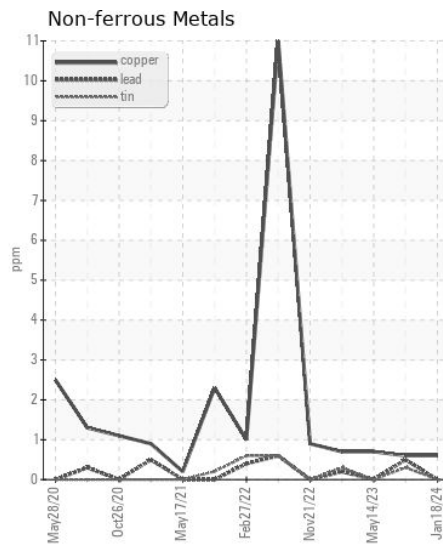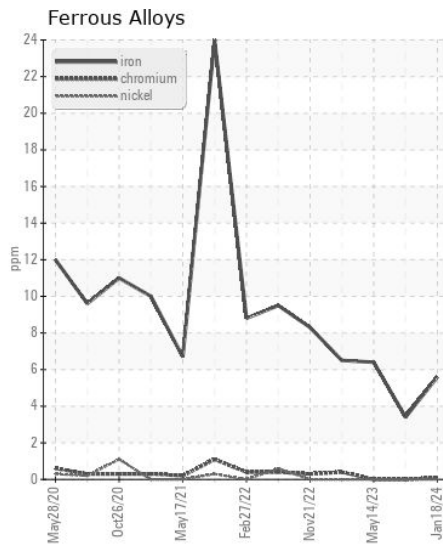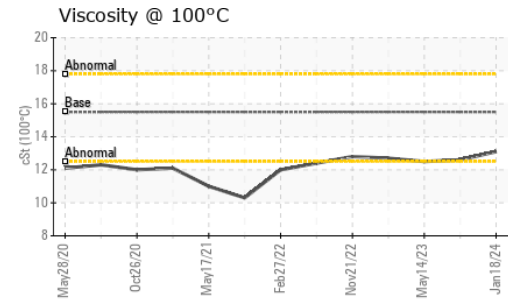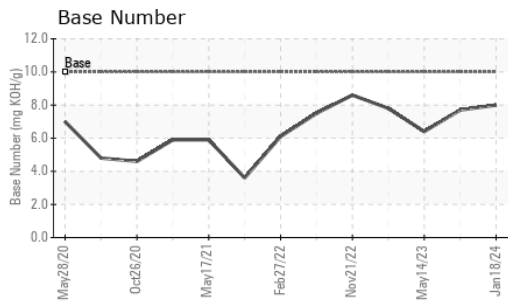

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0813394 **Received** : 18 Jan 2024  
**Lab Number** : 06064764 **Diagnosed** : 21 Jan 2024  
**Unique Number** : 10836146 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CITY OF BERKELEY**  
 1199 SECOND ST  
 BERKELEY, CA  
 US 94710  
 Contact: BAL JOHAL  
 bjoahal@ci.berkeley.ca.us  
 T: (510)981-6375  
 F: (510)558-1330