



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT FT-23
Component
Diesel Engine
Fluid
UNITED OIL DURALENE (40 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0032192	DC0030772	DC0030781
Sample Date		Client Info		13 Jan 2024	13 Nov 2023	18 Sep 2023
Machine Age	mls	Client Info		777852	763162	754399
Oil Age	mls	Client Info		14690	4981	14340
Filter Age	mls	Client Info		14690	4981	14340
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	6	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	2	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	2	2	0
Lead	ppm	ASTM D5185m	>40	<1	0	1
Copper	ppm	ASTM D5185m	>330	2	3	73
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	15	20	6
Potassium	ppm	ASTM D5185m	>20	27	34	▲ 1545
Fuel		WC Method	>5	<1.0	0.3	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	0.0	◆ 0.20
Soot %	%	*ASTM D7844	>3	0.1	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	6.5	5.3	10.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	17.8	23.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		12	27	▲ 538
Boron	ppm	ASTM D5185m		6	8	8
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		55	56	291
Manganese	ppm	ASTM D5185m		<1	1	1
Magnesium	ppm	ASTM D5185m		918	877	523
Calcium	ppm	ASTM D5185m		1094	1076	1001
Phosphorus	ppm	ASTM D5185m		1089	1067	856
Zinc	ppm	ASTM D5185m		1295	1258	965
Sulfur	ppm	ASTM D5185m		3330	3369	3246
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.9	13.5	15.8
Base Number (BN)	mg KOH/g	ASTM D2896		9.0	9.7	10.0
Visc @ 100°C	cSt	ASTM D445		13.9	▲ 11.4	14.8

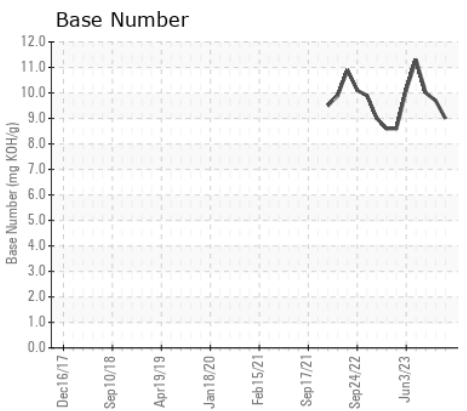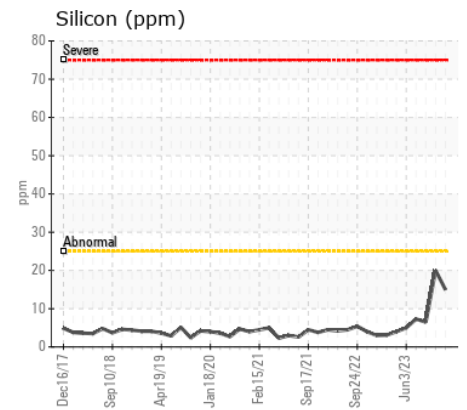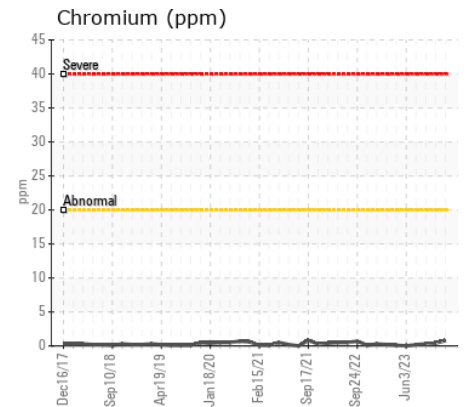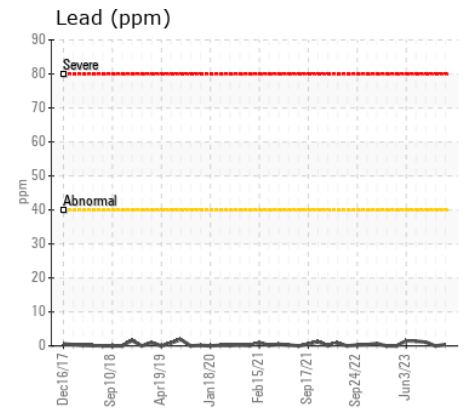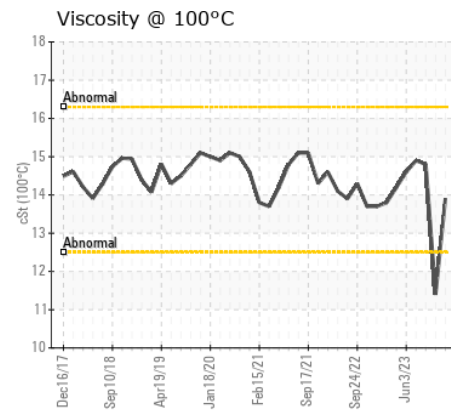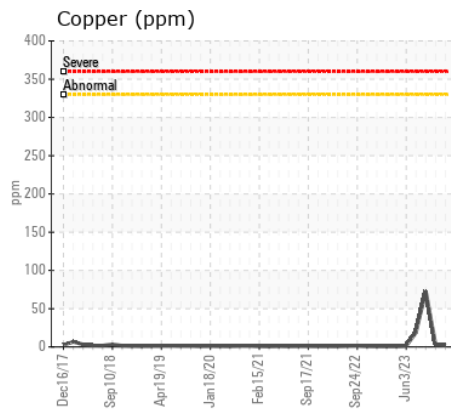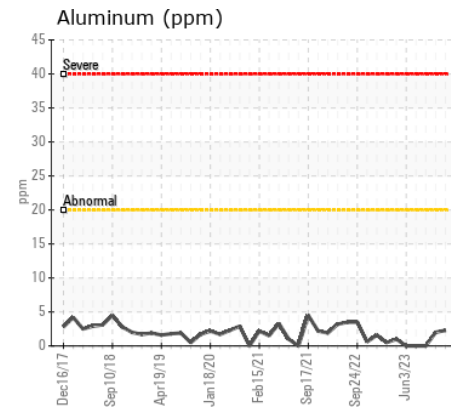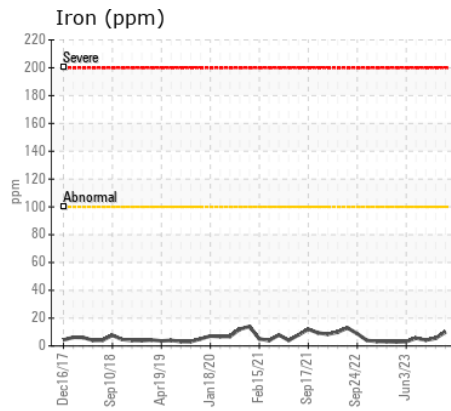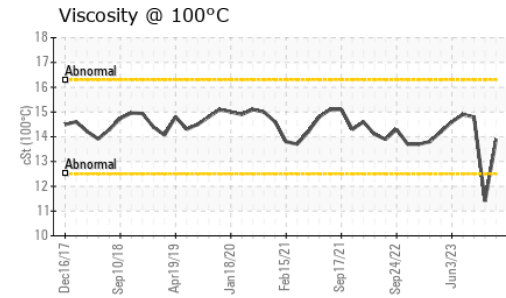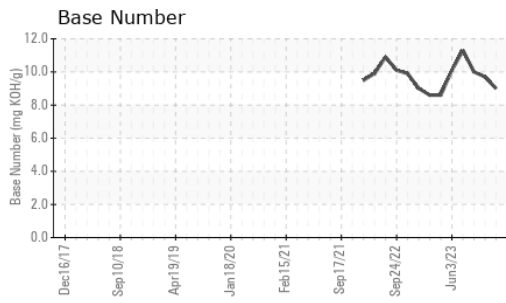

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0032192 **Received** : 18 Jan 2024
Lab Number : 06064894 **Diagnosed** : 19 Jan 2024
Unique Number : 10836276 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

FORRY TRANSPORT INC.
 1477 CARLISLE PIKE
 HANOVER, PA
 US 17331
 Contact: WILLIE FORRY
 willie@forrytrans.com
 T: (717)632-7864
 F: (717)632-7695