



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**186 (S/N 694120)**  
 Component  
**Diesel Engine**  
 Fluid  
**DURALENE Ultra-Guard 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0030820</b>	---	---
Sample Date		Client Info		<b>13 Dec 2023</b>	---	---
Machine Age	hrs	Client Info		<b>2470</b>	---	---
Oil Age	hrs	Client Info		<b>500</b>	---	---
Filter Age	hrs	Client Info		<b>500</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>11</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>31	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.21	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>1</b>	---	---
Boron	ppm	ASTM D5185m		<b>2</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>51</b>	---	---
Calcium	ppm	ASTM D5185m		<b>2210</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>925</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1108</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3790</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>10.4</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.4</b>	---	---
Visc @ 100°C	cSt	ASTM D445		<b>12.7</b>	---	---

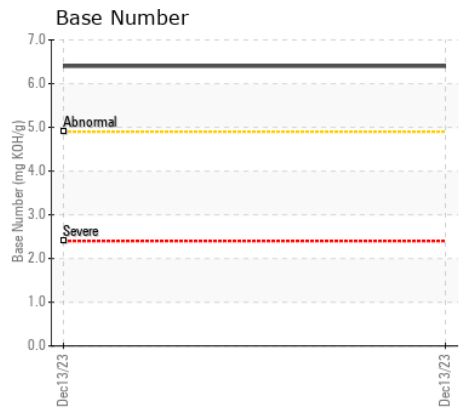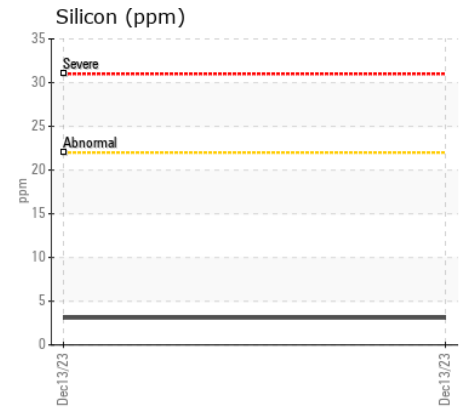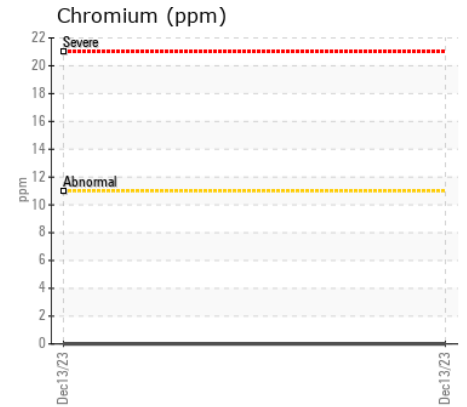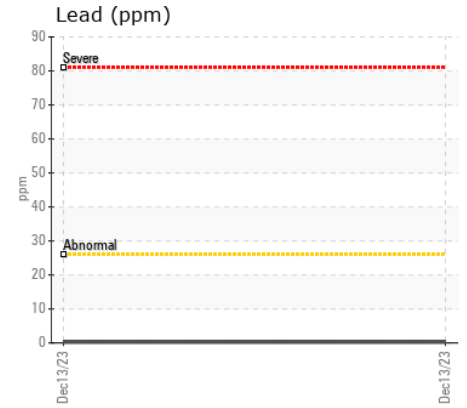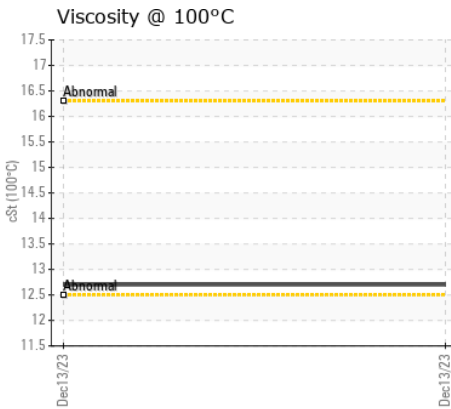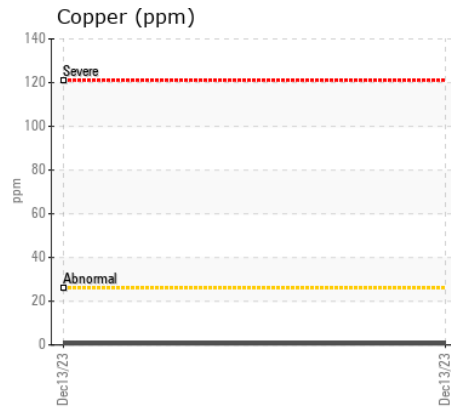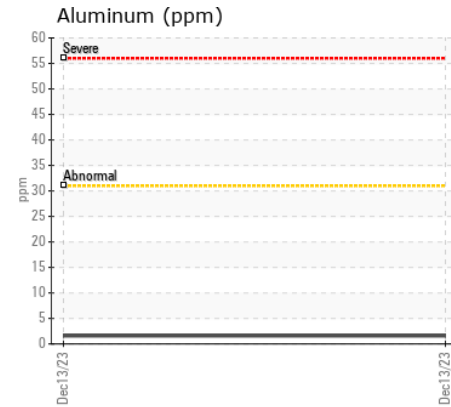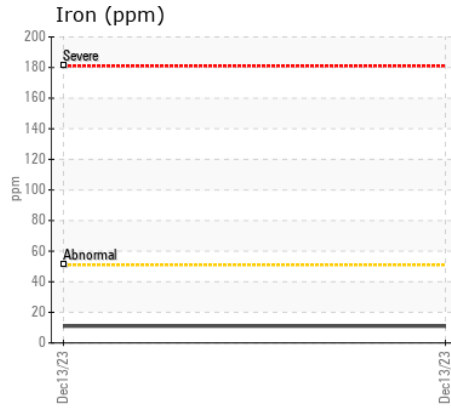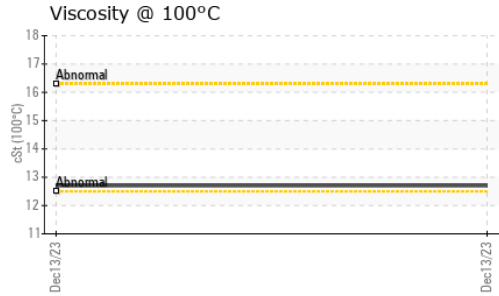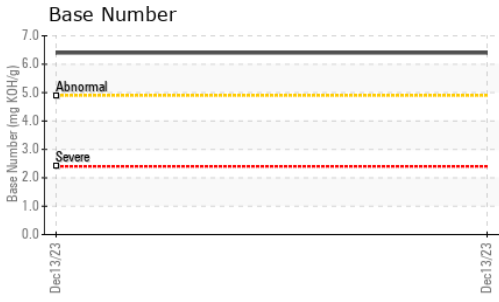

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0030820 **Received** : 18 Jan 2024  
**Lab Number** : 06064919 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10836301 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**UTILITIES UNLIMITED INC**  
 612 WEDEKINO DR  
 WOODBINE, MD  
 US 21797  
 Contact: ANDREW  
 andrew@utilitiesunlimitedinc.com  
 T: (410)591-7955  
 F: