



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NOT GIVEN LH0273237 (S/N NO INFO ON SIF/BOTTLE)

Component
Diesel Engine

Fluid
LIEBHERR MOTOROIL 10W-40 LOW ASH (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0273237	---	---
Sample Date		Client Info		11 Jan 2024	---	---
Machine Age	hrs	Client Info		12288	---	---
Oil Age	hrs	Client Info		627	---	---
Filter Age	hrs	Client Info		627	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	54	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>4	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	6	---	---
Lead	ppm	ASTM D5185m	>40	7	---	---
Copper	ppm	ASTM D5185m	>330	25	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	2.8	---	---
Nitration	Abs/cm	*ASTM D7624	>20	14.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m	169	26	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	2	0	---	---
Manganese	ppm	ASTM D5185m	<1	1	---	---
Magnesium	ppm	ASTM D5185m	724	802	---	---
Calcium	ppm	ASTM D5185m	1323	1247	---	---
Phosphorus	ppm	ASTM D5185m	678	796	---	---
Zinc	ppm	ASTM D5185m	776	940	---	---
Sulfur	ppm	ASTM D5185m	2859	3547	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.28	7.1	---	---
Visc @ 100°C	cSt	ASTM D445	13.0	13.8	---	---

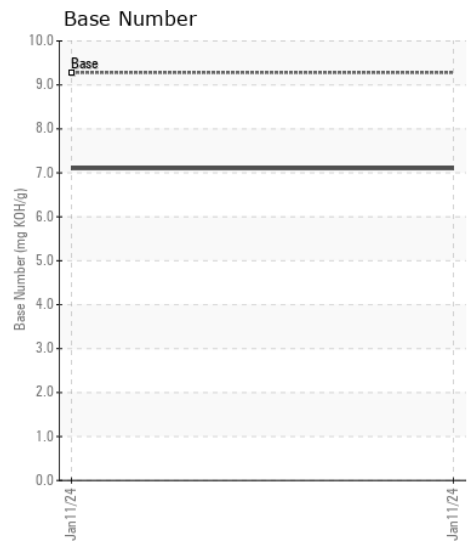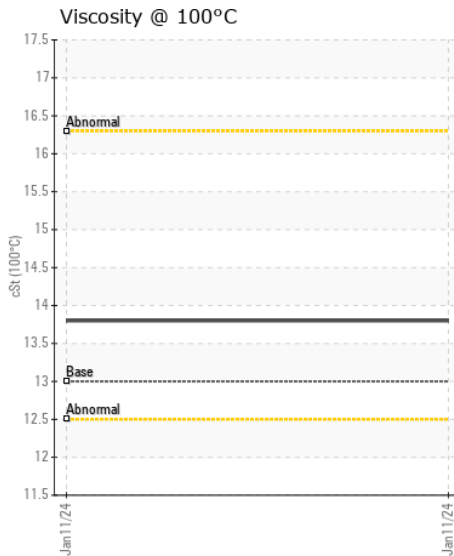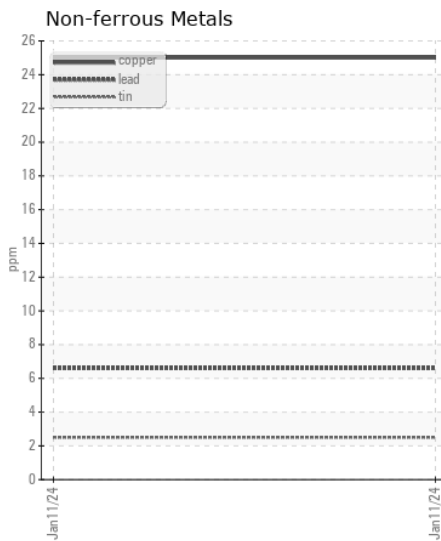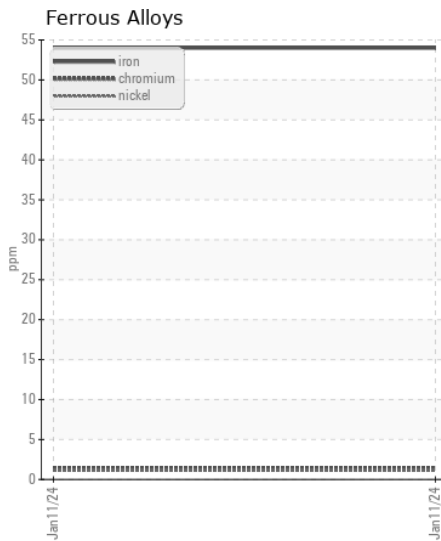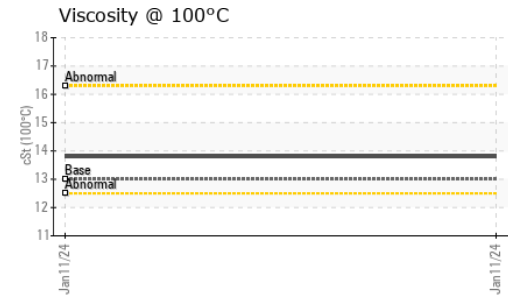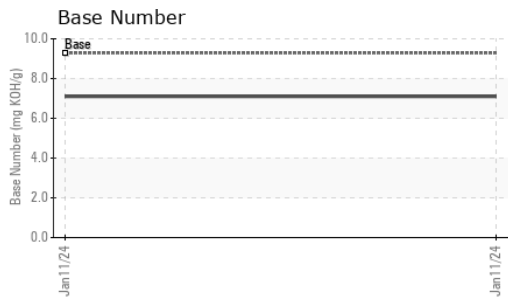

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0273237 **Received** : 18 Jan 2024
Lab Number : 06064945 **Diagnosed** : 19 Jan 2024
Unique Number : 10836327 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

RECO EQUIPMENT INC.
 20620 ROUTE 19 NORTH
 CRANBERRY TOWNSHIP, PA
 US 16066
 Contact: RICK STARINCHAK
 RAS@RECOEQUIP.COM
 T: (724)779-4646
 F: (724)779-4611