



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[05W44442]
 Machine Id
CATERPILLAR 938M 0J3R03125
 Component
Hydraulic System
 Fluid
CAT HYDO (120 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199201	JR0192062	JR0182126
Sample Date		Client Info		17 Jan 2024	13 Nov 2023	10 Aug 2023
Machine Age	hrs	Client Info		14960	14521	14004
Oil Age	hrs	Client Info		14960	14521	14004
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	7	5	11
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	0	2
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>75	3	2	4
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	1	3
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	3248	▲ 11278	1436
Particles >6µm		ASTM D7647	>1300	77	▲ 1331	422
Particles >14µm		ASTM D7647	>160	10	48	44
Particles >21µm		ASTM D7647	>40	1	11	10
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/13/10	▲ 21/18/13	18/16/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	<1	2
Boron	ppm	ASTM D5185m		3	2	2
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		3	2	2
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		256	234	445
Calcium	ppm	ASTM D5185m		172	161	188
Phosphorus	ppm	ASTM D5185m	1100	801	685	892
Zinc	ppm	ASTM D5185m	1210	867	777	1029
Sulfur	ppm	ASTM D5185m		5576	4655	5849
Acid Number (AN)	mg KOH/g	ASTM D8045		0.63	0.69	0.81
Visc @ 40°C	cSt	ASTM D445	37.9	45.2	45.1	42.0

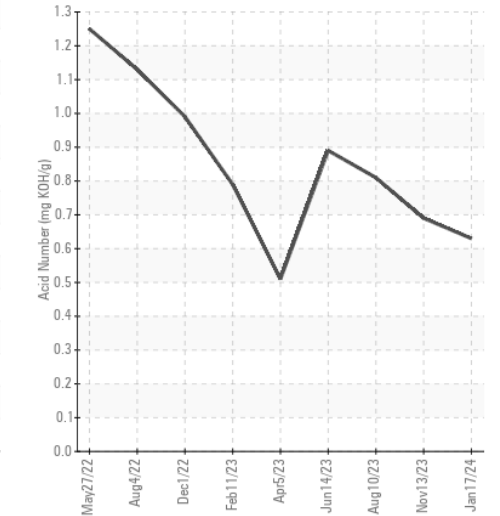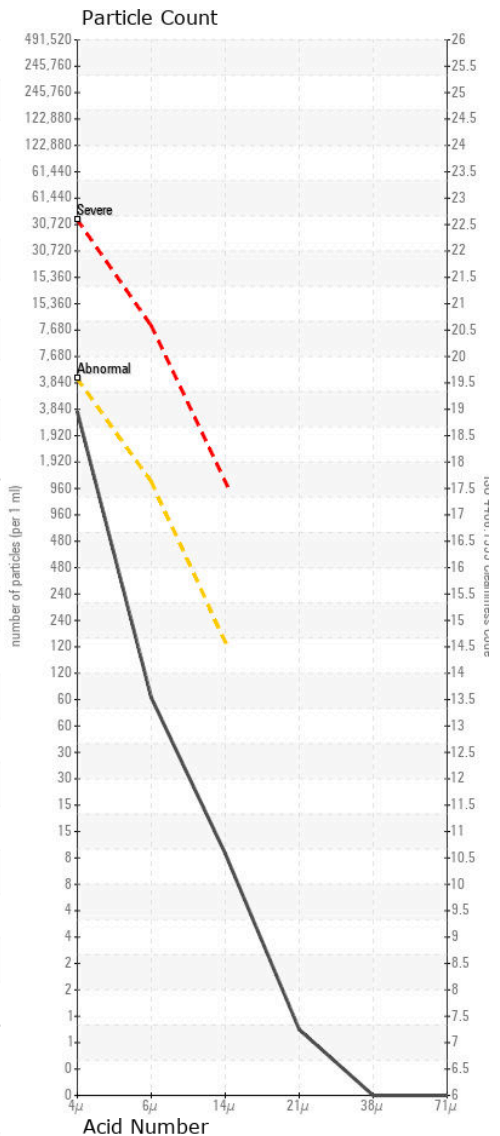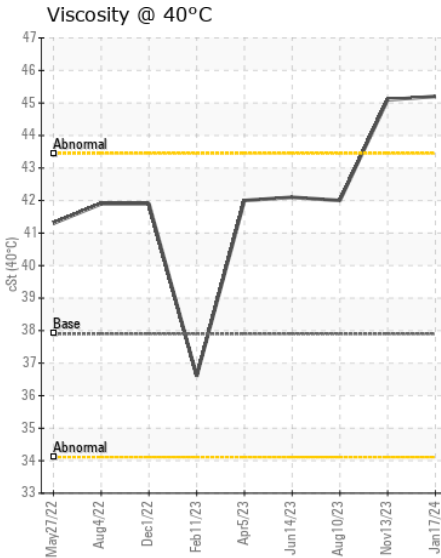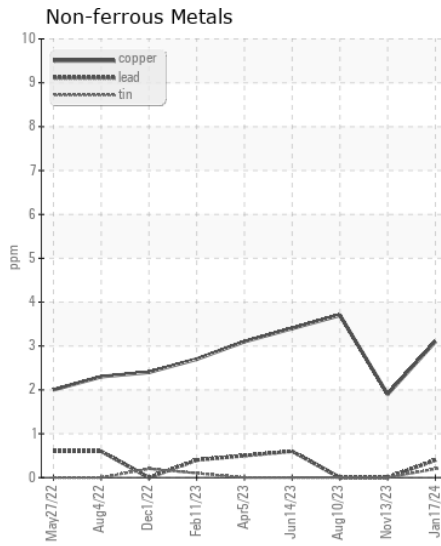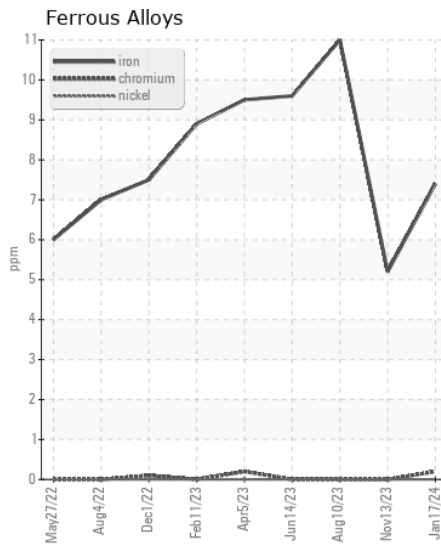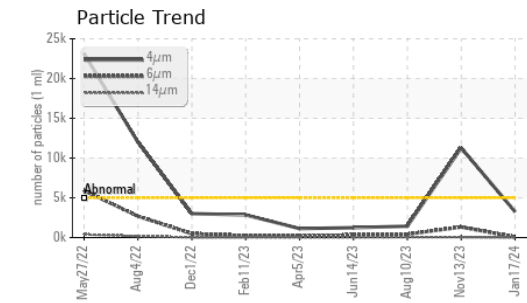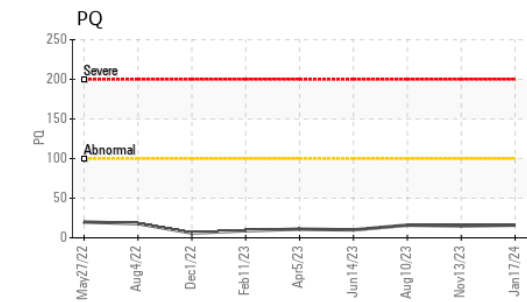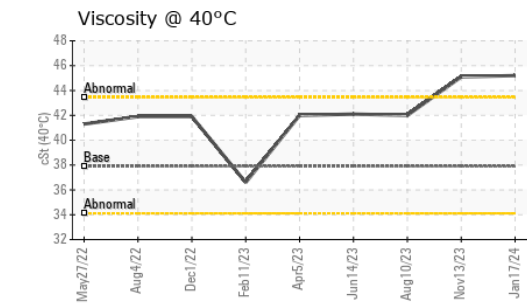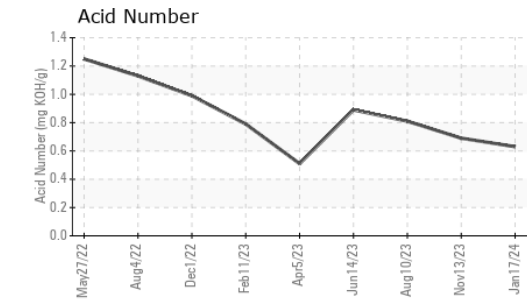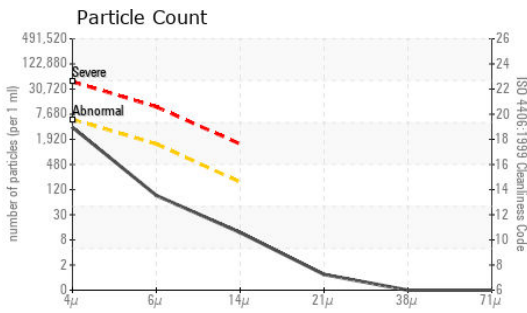

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199201 **Received** : 18 Jan 2024
Lab Number : 06064988 **Diagnosed** : 22 Jan 2024
Unique Number : 10836370 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: BRANDON RATLIFF
 brandon.ratliff@jamesriverequipment.com

T:
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)