



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 1DW768LBHMF712696

Component
Rear Right Final Drive

Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION







The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JRMC398479	JR0171419	JR0155028
Sample Date		Client Info		04 Jan 2024	26 Jun 2023	18 Jan 2023
Machine Age	hrs	Client Info		2542	1984	1505
Oil Age	hrs	Client Info		1000	1984	500
Filter Age	hrs	Client Info		500	0	500
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

PQ		ASTM D8184	>1250	17	37	30
Iron	ppm	ASTM D5185m	>750	24	46	58
Chromium	ppm	ASTM D5185m	>9	<1	<1	1
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	2	0	2
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	1	2	6
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m	>170	0	0	1
Boron	ppm	ASTM D5185m	400	17	28	29
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	0	<1	<1
Manganese	ppm	ASTM D5185m		0	<1	1
Magnesium	ppm	ASTM D5185m	12	11	39	45
Calcium	ppm	ASTM D5185m	150	7	8	6
Phosphorus	ppm	ASTM D5185m	1650	452	351	383
Zinc	ppm	ASTM D5185m	125	0	5	10
Sulfur	ppm	ASTM D5185m	22500	21706	20896	20695
Visc @ 40°C	cSt	ASTM D445	143	139	140	137

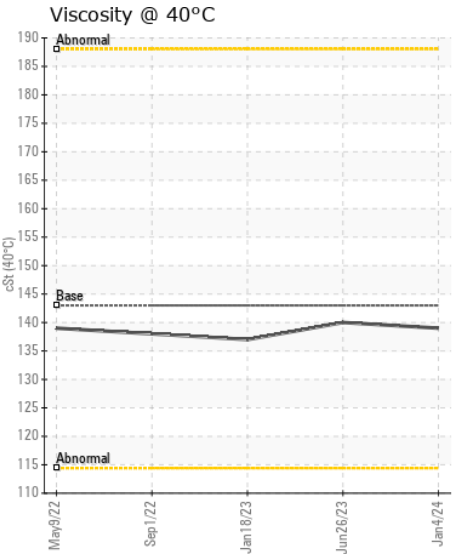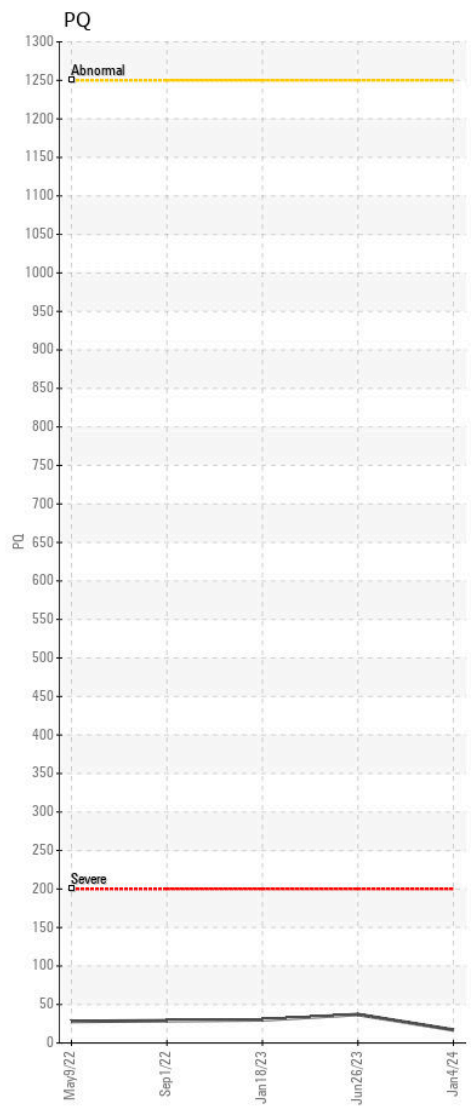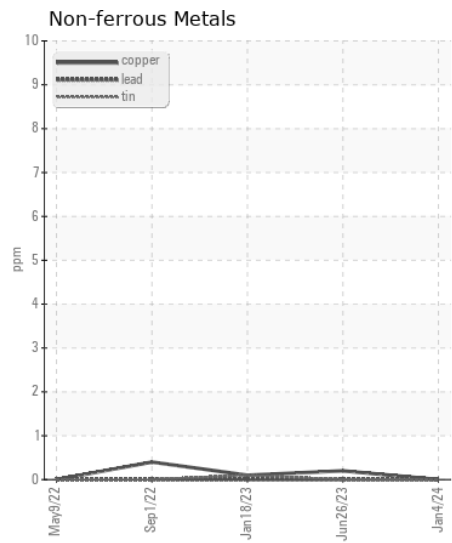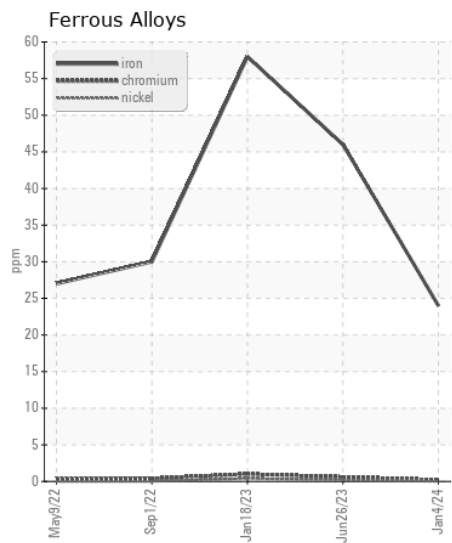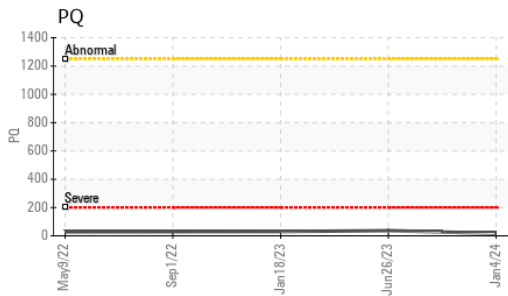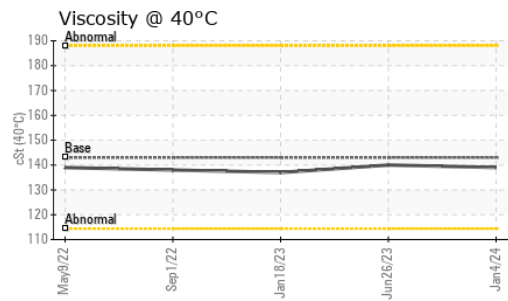

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JRMC398479 **Received** : 18 Jan 2024
Lab Number : 06065169 **Diagnosed** : 19 Jan 2024
Unique Number : 10836551 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

WOOD HARVEST
 PO BOX 2165
 MONROE, NC
 US 28111
 Contact: DEAN SCOTTY
 dean@woodharvest.com
 T: (704)289-9570
 F: (704)289-9824