



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
IAN PORTER [SAM]
Machine Id
VOLVO PENTA 3194008294
Component
Center Left IPS
Fluid
GEAR OIL SAE 75W90 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA059135	VPA037118	---
Sample Date		Client Info		09 Jan 2024	20 Jan 2022	---
Machine Age	hrs	Client Info		1006	0	---
Oil Age	hrs	Client Info		150	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		26	22	---
Iron	ppm	ASTM D5185m	>200	92	15	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m		3	4	---
Lead	ppm	ASTM D5185m		0	0	---
Copper	ppm	ASTM D5185m		5	5	---
Tin	ppm	ASTM D5185m		0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		22	14	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m	400	300	330	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	2	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	12	2	2	---
Calcium	ppm	ASTM D5185m	150	5	5	---
Phosphorus	ppm	ASTM D5185m	1650	1294	1282	---
Zinc	ppm	ASTM D5185m	125	0	6	---
Sulfur	ppm	ASTM D5185m	22500	23996	21235	---
Visc @ 40°C	cSt	ASTM D445	109	108	104	---

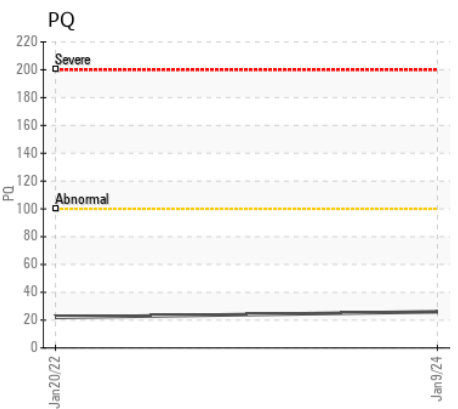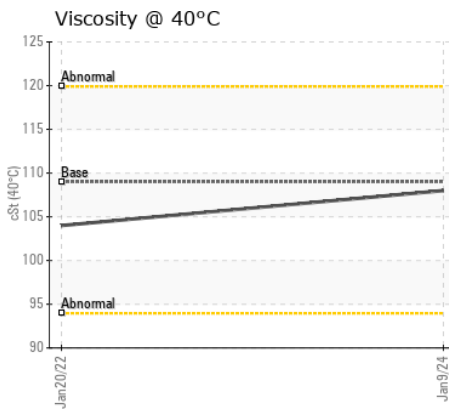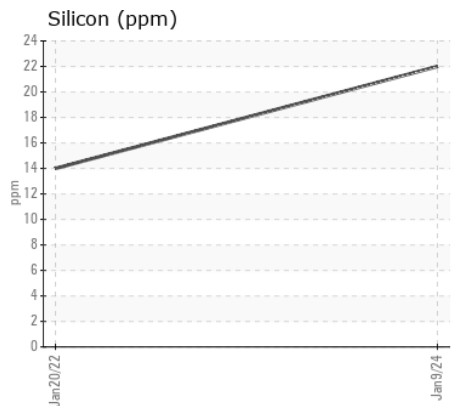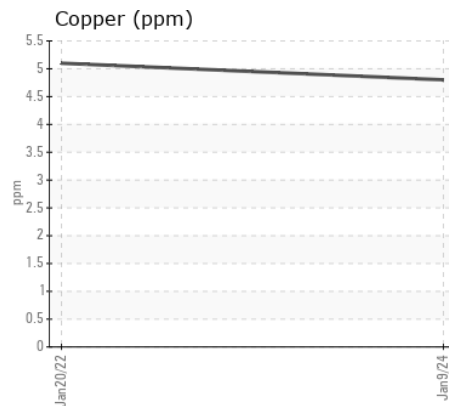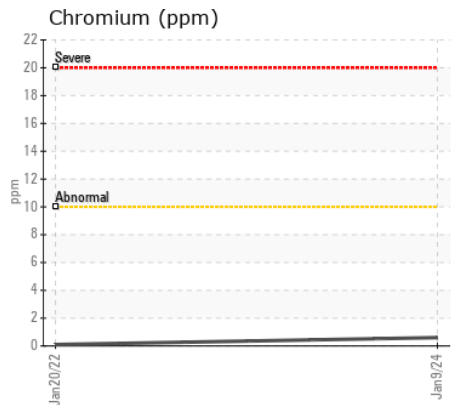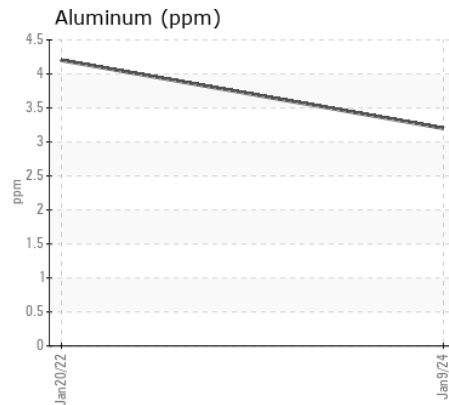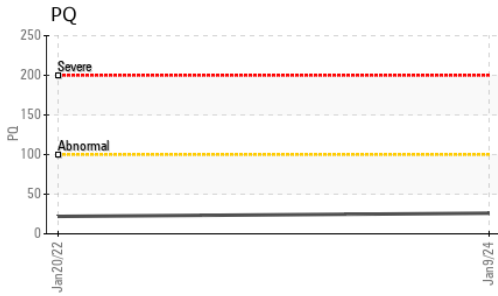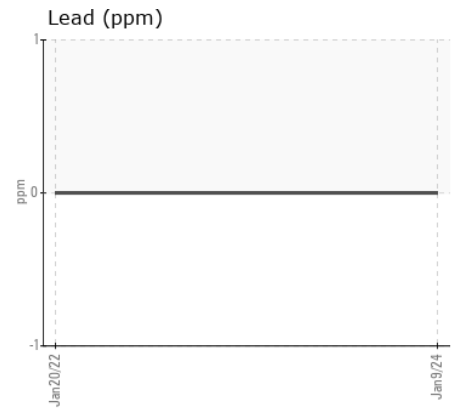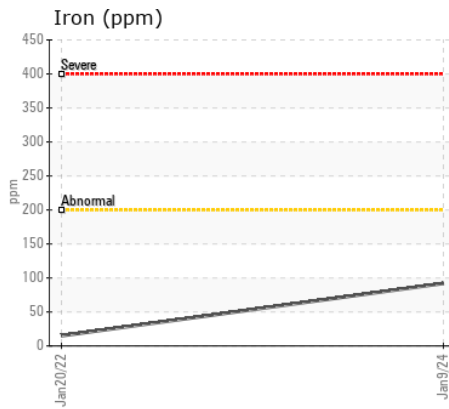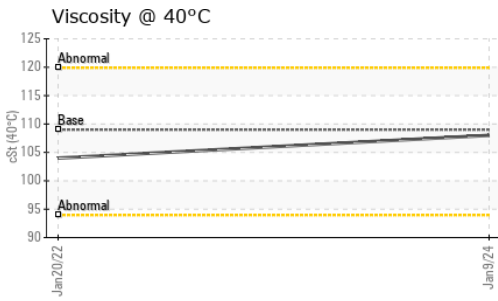

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA059135 **Received** : 18 Jan 2024
Lab Number : 06065174 **Diagnosed** : 22 Jan 2024
Unique Number : 10836556 **Diagnostician** : Sean Felton
Test Package : MOB 1 (Additional Tests: PQ)

Endor Marine LLC - Coastal Marine - 152124
 4300 11th Ave. NW
 SEATTLE, WA
 US 98107
 Contact: WILLOW YANARELLA
 service@coastalmarineengine.com
 T: (206)784-3703
 F: (206)784-8823

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)