



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	ABNORMAL

Area
[455652-20 TB LANDMAR]
 Machine Id
TAKEUCHI TL10V2 410001434
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP429441	---	---
Sample Date		Client Info		16 Jan 2024	---	---
Machine Age	hrs	Client Info		2400	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	21	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	23	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Light fuel dilution occurring.


Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel	%	ASTM D3524	>5	▲ 2.7	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		6	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		51	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		784	---	---
Calcium	ppm	ASTM D5185m		881	---	---
Phosphorus	ppm	ASTM D5185m		809	---	---
Zinc	ppm	ASTM D5185m		1030	---	---
Sulfur	ppm	ASTM D5185m		2302	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.3	---	---
Visc @ 100°C	cSt	ASTM D445		▲ 8.7	---	---


▲ Viscosity @ 100°C

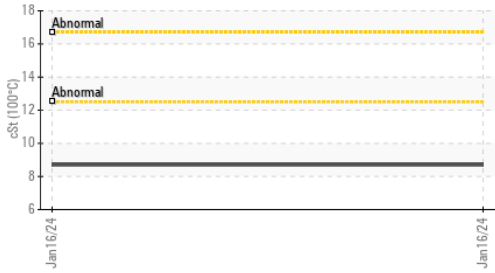


Iron (ppm)

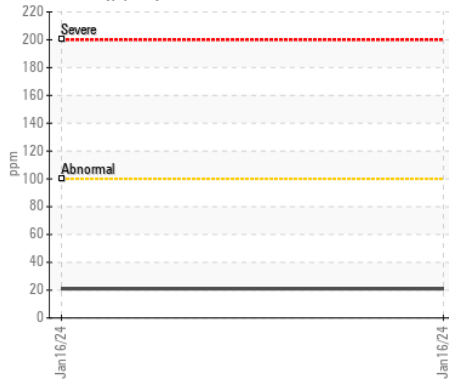


Lead (ppm)

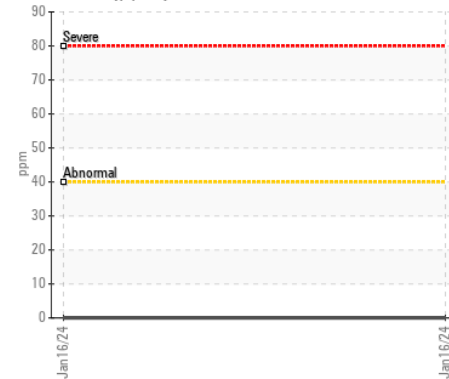


▲ Fuel Dilution

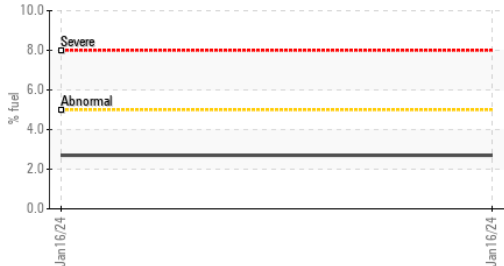

Aluminum (ppm)

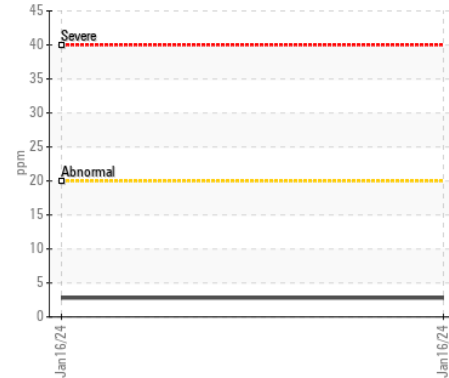


Chromium (ppm)

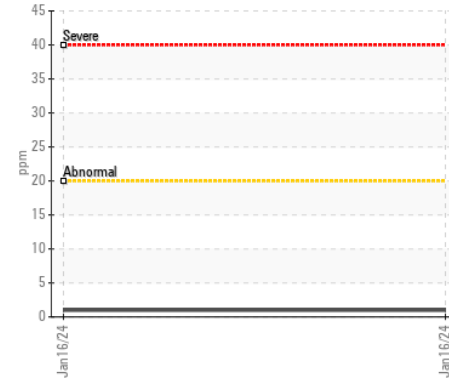


Base Number




Copper (ppm)

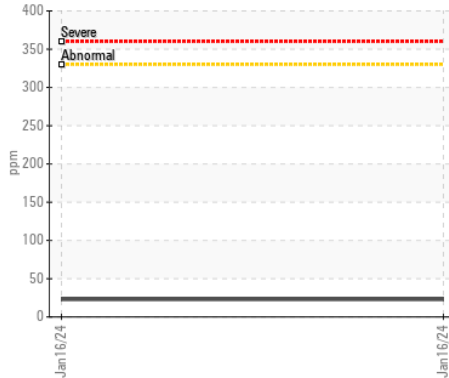


Silicon (ppm)

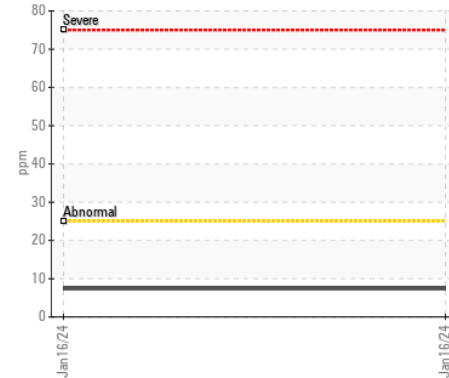

▲ Viscosity @ 100°C

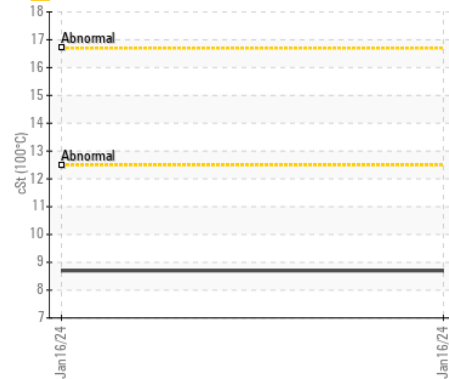

Base Number

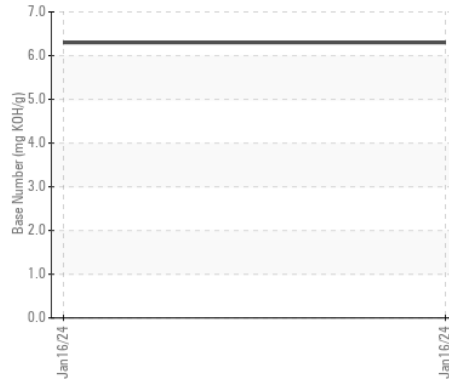

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP429441 **Received** : 19 Jan 2024
Lab Number : 06065279 **Diagnosed** : 23 Jan 2024
Unique Number : 10836661 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

ALTA EQUIPMENT COMPANY

8750 PHILIPS HWY
 JACKSONVILLE, FL
 US 32256

Contact: SHAWN NORTHCRAFT
 shawn.northcraft@altg.com

T: (904)737-6000
 F: (904)737-1260

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)