



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**922039-282**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0066152</b>	GFL0066126	GFL0066131
Sample Date		Client Info		<b>22 Dec 2023</b>	16 Oct 2023	18 Aug 2023
Machine Age	hrs	Client Info		<b>8649</b>	8089	7585
Oil Age	hrs	Client Info		<b>600</b>	600	600
Filter Age	hrs	Client Info		<b>600</b>	600	600
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>19</b>	12	43
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>2</b>	0	1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	0	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	0	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	4
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.8</b>	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.8</b>	9.5	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	21.2	20.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>12</b>	4	9
Boron	ppm	ASTM D5185m	0	<b>3</b>	0	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m	60	<b>66</b>	61	47
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	1
Magnesium	ppm	ASTM D5185m	1010	<b>1070</b>	932	736
Calcium	ppm	ASTM D5185m	1070	<b>1117</b>	1075	1054
Phosphorus	ppm	ASTM D5185m	1150	<b>1090</b>	960	802
Zinc	ppm	ASTM D5185m	1270	<b>1316</b>	1181	1018
Sulfur	ppm	ASTM D5185m	2060	<b>2803</b>	2861	2655
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.7</b>	17.5	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.1</b>	7.5	7.6
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	13.8	14.1

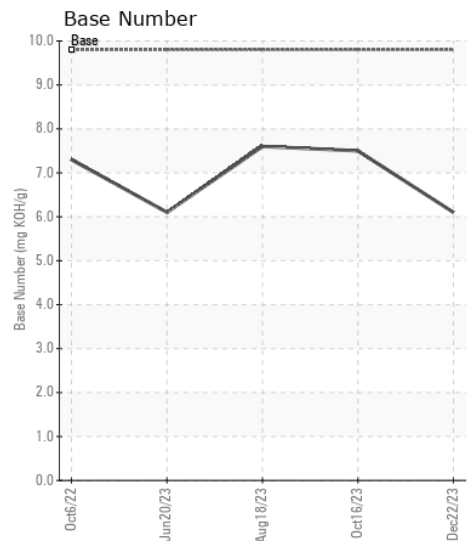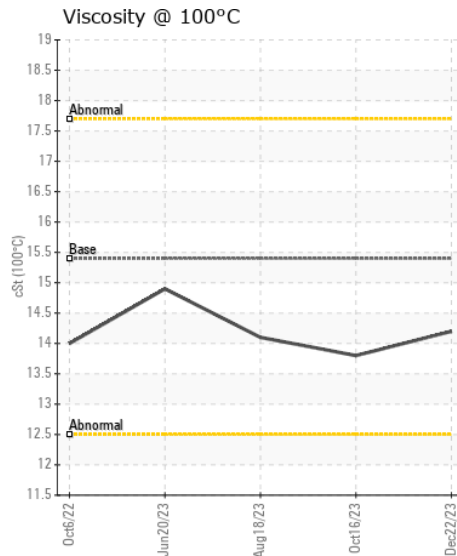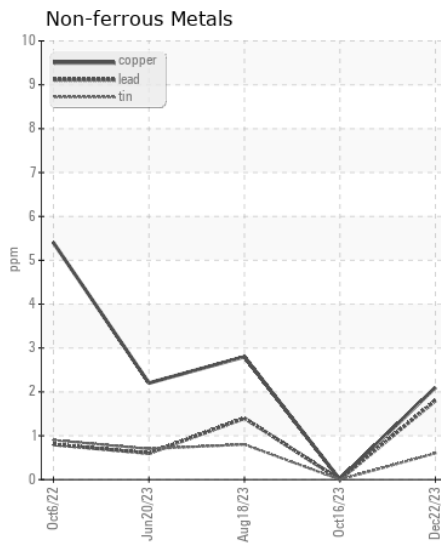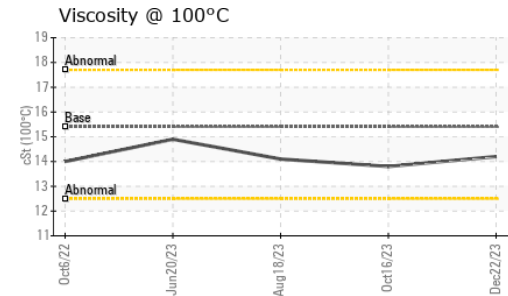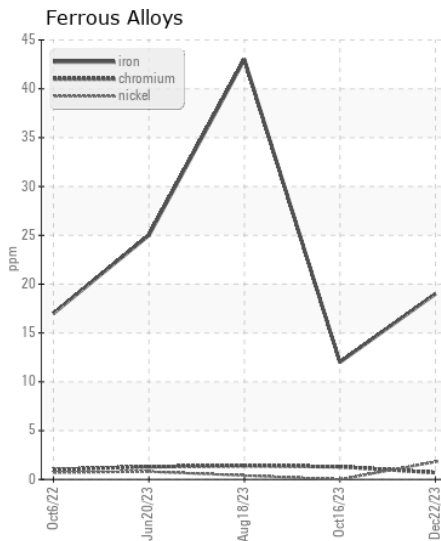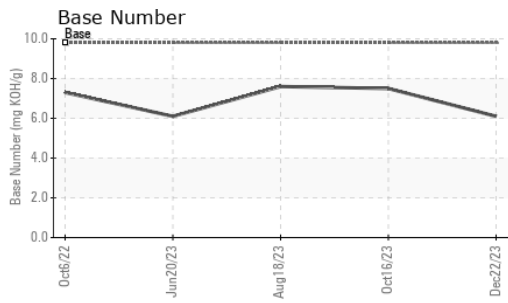

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0066152 **Received** : 19 Jan 2024  
**Lab Number** : 06065294 **Diagnosed** : 20 Jan 2024  
**Unique Number** : 10836676 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 904A - Thorpe**  
 N14985 Tieman Ave  
 Thorp, WI  
 US 54771  
 Contact: Andy Kane  
 akane@gflenv.com  
 T: (715)202-3420  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)