



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MIKE NADICKSBERND (S/N 74-C1-1142)

Component
Port Main Engine

Fluid
CHEVRON DELO 710 LS (275 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0057676	MW0057688	MW0057715
Sample Date		Client Info		10 Jan 2024	15 Nov 2023	20 Oct 2023
Machine Age	hrs	Client Info		38458	37780	37156
Oil Age	hrs	Client Info		15894	15215	14615
Filter Age	hrs	Client Info		181	1164	540
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Changed	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	24	30	26
Chromium	ppm	ASTM D5185m	>8	1	1	1
Nickel	ppm	ASTM D5185m	>2	<1	1	<1
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>15	1	3	2
Lead	ppm	ASTM D5185m	>18	8	9	7
Copper	ppm	ASTM D5185m	>80	27	36	31
Tin	ppm	ASTM D5185m	>14	9	9	7
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	4	3
Potassium	ppm	ASTM D5185m	>20	<1	3	2
Fuel		WC Method	>4.0	<1.0	<1.0	1.8
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.2	1.3	1.2
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.7	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.9	18.0	17.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<1	1	0
Boron	ppm	ASTM D5185m		37	45	43
Barium	ppm	ASTM D5185m		0	0	6
Molybdenum	ppm	ASTM D5185m		46	54	46
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		16	14	21
Calcium	ppm	ASTM D5185m		3418	4005	3312
Phosphorus	ppm	ASTM D5185m		8	5	49
Zinc	ppm	ASTM D5185m		2	0	8
Sulfur	ppm	ASTM D5185m		2259	2783	2318
Oxidation	Abs/.1mm	*ASTM D7414	>25	10.3	10.4	9.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	6.2	6.7	6.4
Visc @ 100°C	cSt	ASTM D445	15.5	14.1	14.2	▲ 9.9

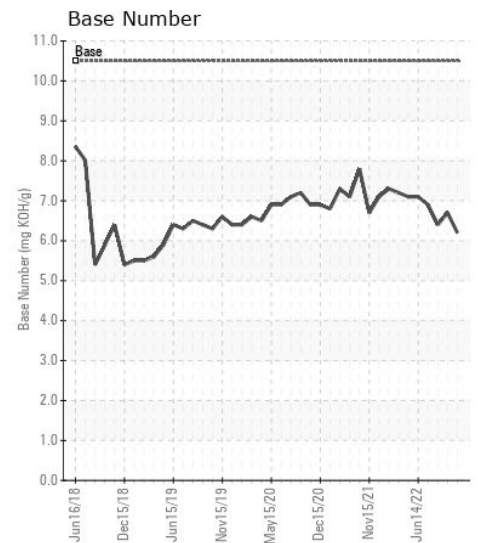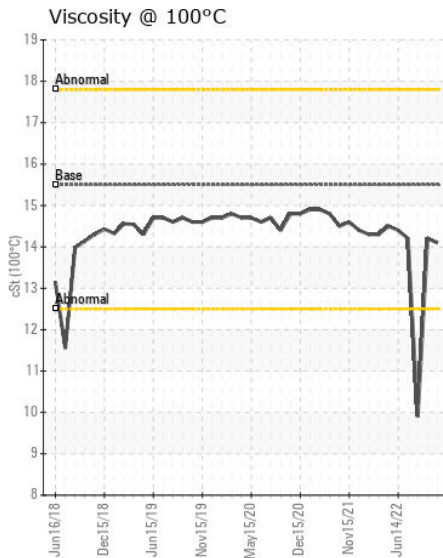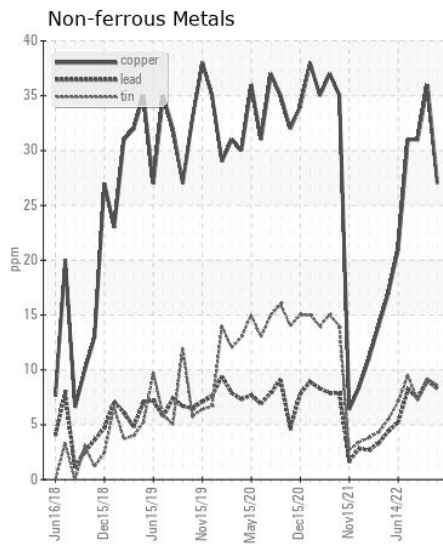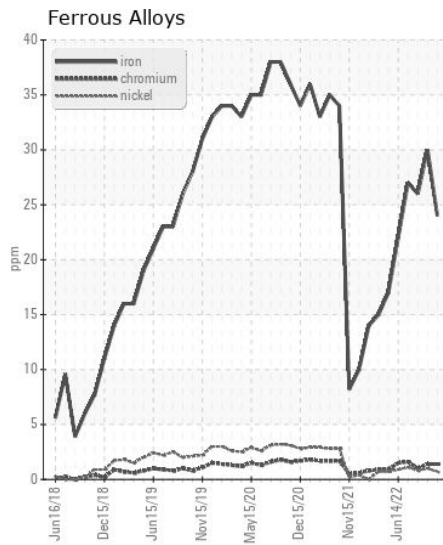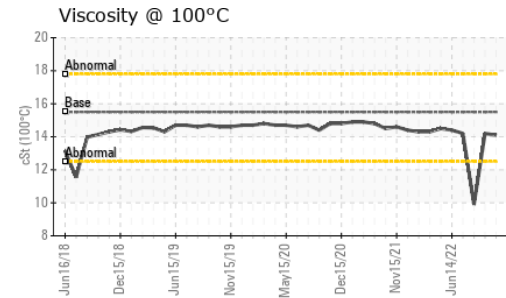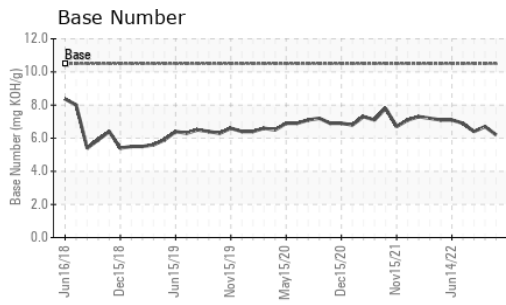

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0057676 **Received** : 19 Jan 2024
Lab Number : 06065365 **Diagnosed** : 22 Jan 2024
Unique Number : 10836747 **Diagnostician** : Wes Davis
Test Package : MAR 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargaeacbl.com
 T:
 F: (812)288-1644