



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
4515M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0097681	GFL0069871	---
Sample Date		Client Info		09 Jan 2024	19 May 2023	---
Machine Age	hrs	Client Info		26200	24870	---
Oil Age	hrs	Client Info		615	600	---
Filter Age	hrs	Client Info		615	600	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

Exhaust valve wear is indicated.

Iron	ppm	ASTM D5185m	>80	35	47	---
Chromium	ppm	ASTM D5185m	>5	1	3	---
Nickel	ppm	ASTM D5185m	>2	▲ 7	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>30	1	6	---
Lead	ppm	ASTM D5185m	>30	0	<1	---
Copper	ppm	ASTM D5185m	>150	36	3	---
Tin	ppm	ASTM D5185m	>5	2	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.




Silicon	ppm	ASTM D5185m	>20	7	12	---
Potassium	ppm	ASTM D5185m	>20	1	13	---
Fuel		WC Method	>5	<1.0	1.1	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.8	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	9.4	8.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	23.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	▲ 751	---
Boron	ppm	ASTM D5185m	0	3	15	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	65	96	---
Manganese	ppm	ASTM D5185m	0	1	<1	---
Magnesium	ppm	ASTM D5185m	1010	1023	▲ 520	---
Calcium	ppm	ASTM D5185m	1070	1136	▲ 660	---
Phosphorus	ppm	ASTM D5185m	1150	984	▲ 670	---
Zinc	ppm	ASTM D5185m	1270	1336	▲ 849	---
Sulfur	ppm	ASTM D5185m	2060	2485	2737	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	18.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.4	5.9	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	▲ 10.9	---


▲ Ferrous Alloys

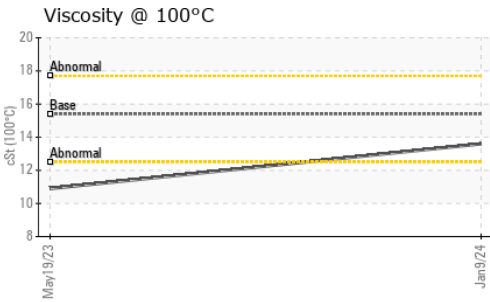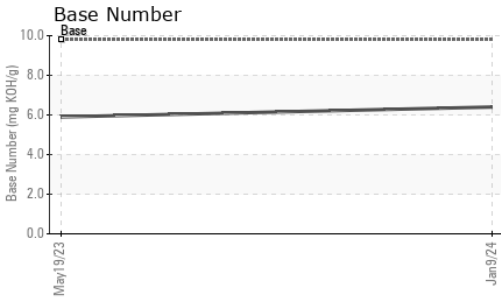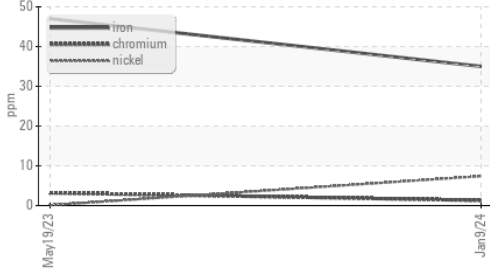


▲ Ferrous Alloys

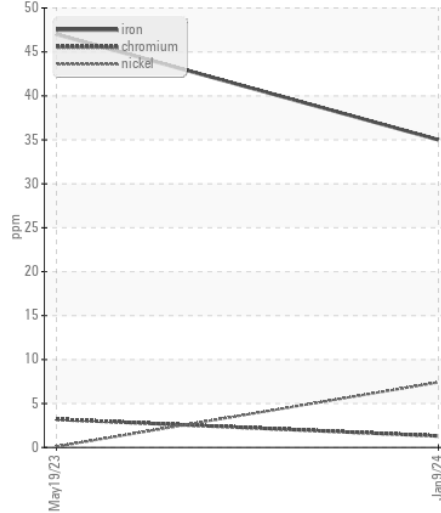


Non-ferrous Metals

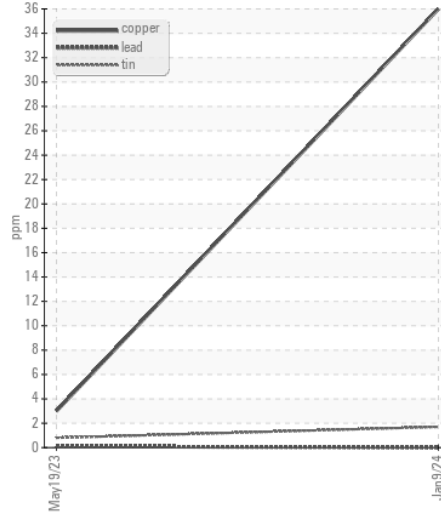

Viscosity @ 100°C

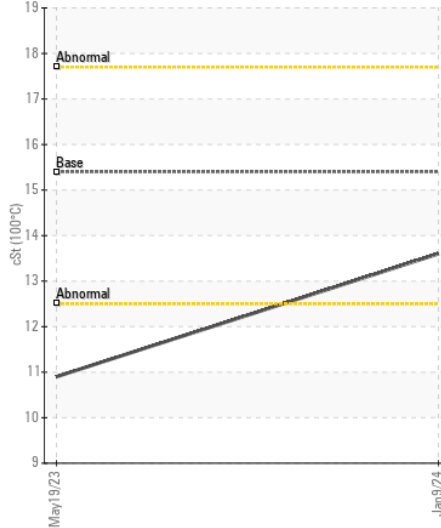

Base Number

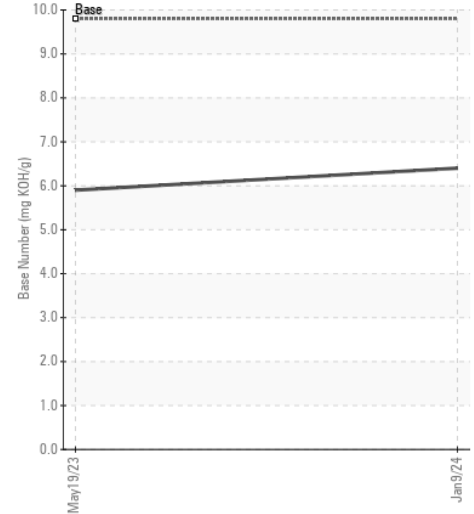

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0097681 **Received** : 19 Jan 2024
Lab Number : 06065380 **Diagnosed** : 22 Jan 2024
Unique Number : 10836762 **Diagnostician** : Sean Felton
Test Package : FLEET

GFL Environmental - 405 - Arbor Hills
 7400 Napier Rd
 NORTHVILLE, MI
 US 48168

Contact: Anthony Hopkins
 ahopkins@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: