



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area

Mobile Fleet

Machine Id

6448 6448

Component

Hydraulic System

Fluid

MOBIL MOBILFLUID 424 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0861779	WC0861747	WC0819122
Sample Date		Client Info		17 Jan 2024	15 Nov 2023	16 Jun 2023
Machine Age	hrs	Client Info		6549	6261	5516
Oil Age	hrs	Client Info		1033	745	1020
Filter Age	hrs	Client Info		1033	745	1020
Oil Changed		Client Info		Changed	Not Chngd	Changed
Filter Changed		Client Info		Changed	Not Chngd	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	6	7
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	2	2
Lead	ppm	ASTM D5185m	>10	<1	1	<1
Copper	ppm	ASTM D5185m	>75	3	3	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	9	12	8
Potassium	ppm	ASTM D5185m	>20	0	3	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	4494	▲ 7664	▲ 25272
Particles >6µm		ASTM D7647	>1300	▲ 1366	▲ 2930	▲ 9430
Particles >14µm		ASTM D7647	>160	130	▲ 300	▲ 905
Particles >21µm		ASTM D7647	>40	37	▲ 79	▲ 217
Particles >38µm		ASTM D7647	>10	1	2	6
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 19/18/14	▲ 20/19/15	▲ 22/20/17
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	0	2
Boron	ppm	ASTM D5185m		109	153	119
Barium	ppm	ASTM D5185m		0	9	2
Molybdenum	ppm	ASTM D5185m		22	25	10
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		49	50	62
Calcium	ppm	ASTM D5185m		3225	3558	3421
Phosphorus	ppm	ASTM D5185m		1067	1124	1114
Zinc	ppm	ASTM D5185m		1308	1427	1413
Sulfur	ppm	ASTM D5185m		6913	8711	8455
Acid Number (AN)	mg KOH/g	ASTM D8045		0.82	0.84	1.38
Visc @ 40°C	cSt	ASTM D445	55	49.1	51.1	50.0

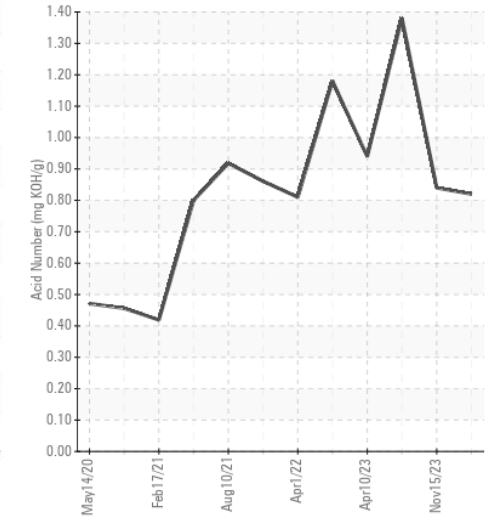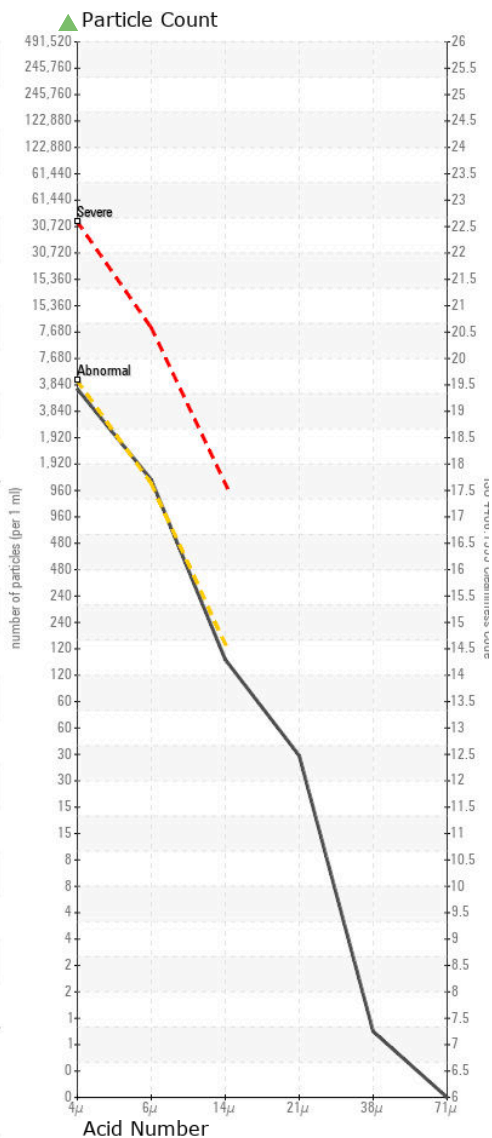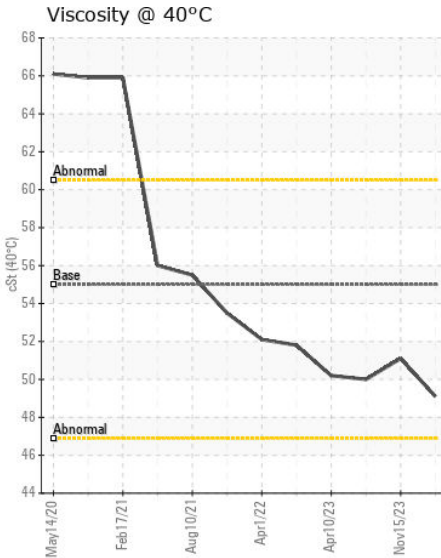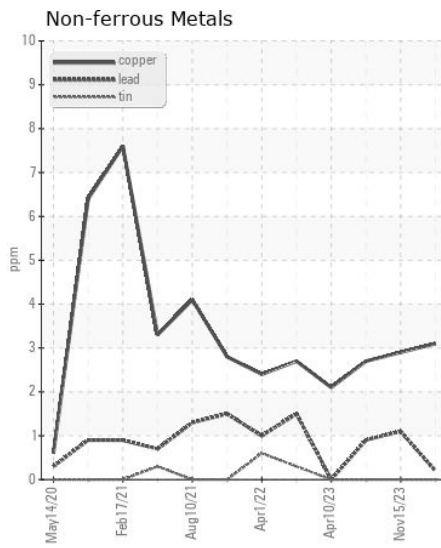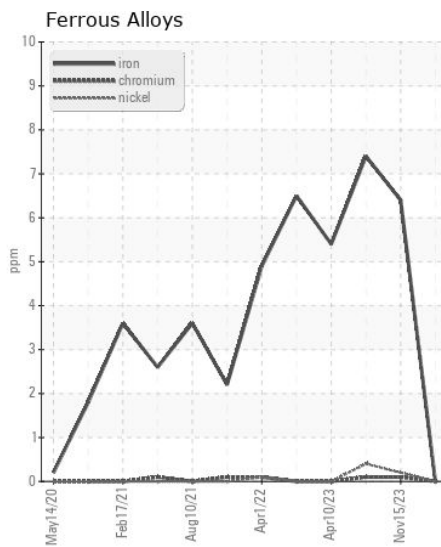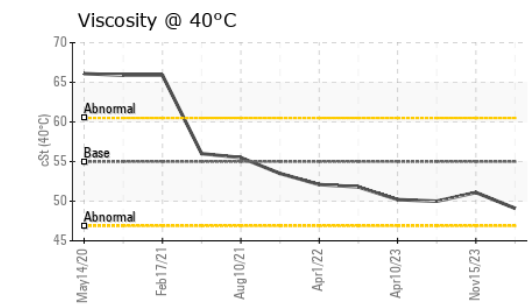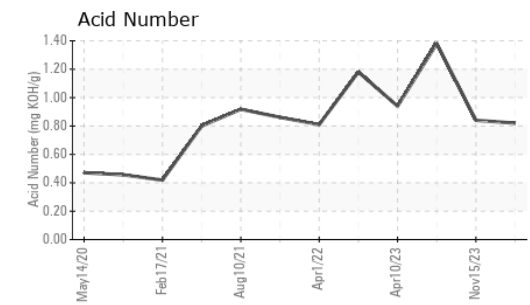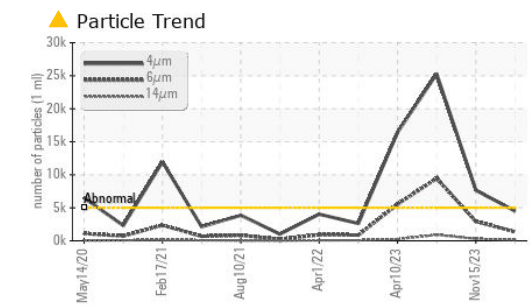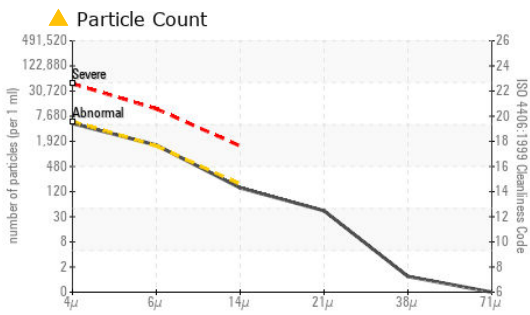

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0861779 **Received** : 19 Jan 2024
Lab Number : 06065553 **Diagnosed** : 23 Jan 2024
Unique Number : 10836935 **Diagnostician** : Don Baldridge
Test Package : CONST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509

Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162