



Area
N.E.R./Off-Road
Machine Id
E-34
Component
Hydraulic System
Fluid
PETRO CANADA DURATRAN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0109742	PCA0104585	PCA0098557
Sample Date		Client Info		16 Jan 2024	11 Oct 2023	12 May 2023
Machine Age	hrs	Client Info		8781	8403	7847
Oil Age	hrs	Client Info		8781	8403	7460
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	2	7	9
Chromium	ppm	ASTM D5185m	>10	1	<1	1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	3	2	2
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	7	8	4
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	4091	▲ 11826	2756
Particles >6µm		ASTM D7647	>1300	497	1130	226
Particles >14µm		ASTM D7647	>160	51	89	23
Particles >21µm		ASTM D7647	>40	19	27	7
Particles >38µm		ASTM D7647	>10	2	2	1
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/13	▲ 21/17/14	19/15/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	2	1
Boron	ppm	ASTM D5185m	110	41	47	14
Barium	ppm	ASTM D5185m	0.0	0	1	0
Molybdenum	ppm	ASTM D5185m	0.0	4	5	5
Manganese	ppm	ASTM D5185m	1	<1	0	<1
Magnesium	ppm	ASTM D5185m	13	57	55	50
Calcium	ppm	ASTM D5185m	3610	2218	2048	1337
Phosphorus	ppm	ASTM D5185m	1192	838	792	707
Zinc	ppm	ASTM D5185m	1455	996	972	898
Sulfur	ppm	ASTM D5185m	2641	2492	2460	2653
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	0.87	0.93	0.618
Visc @ 40°C	cSt	ASTM D445	55.14	45.5	41.9	45.3

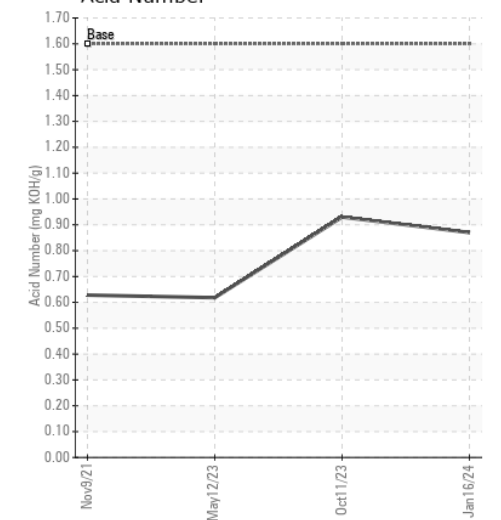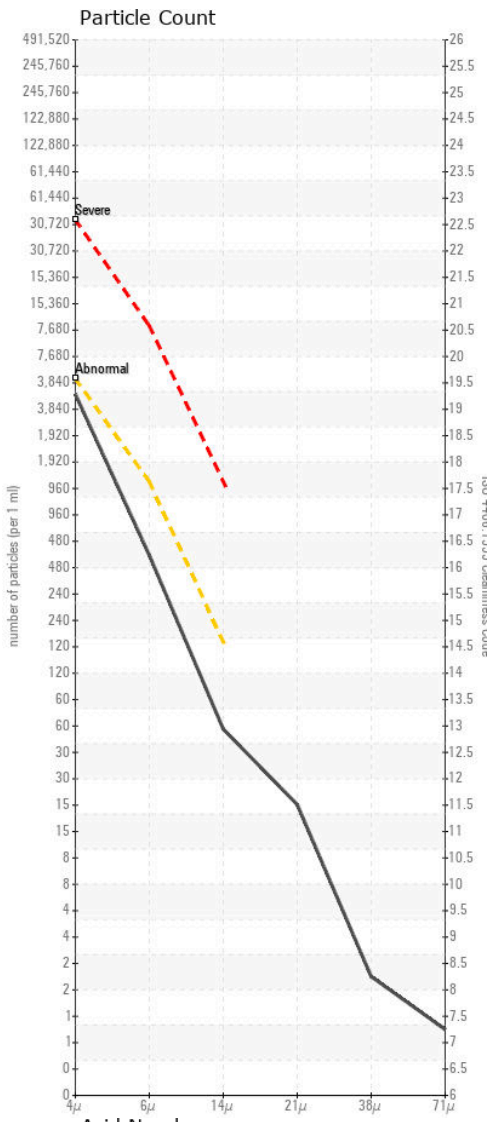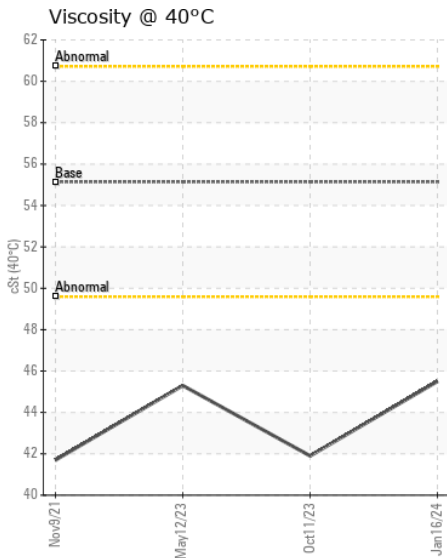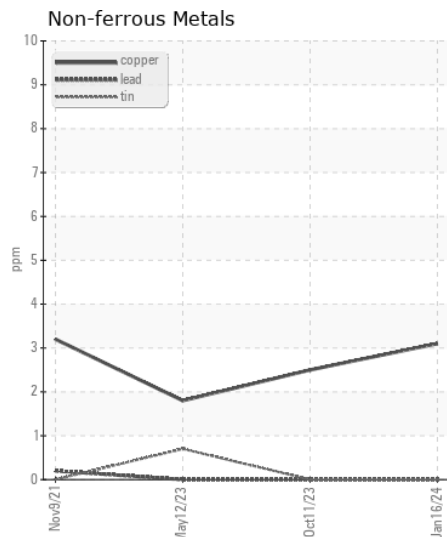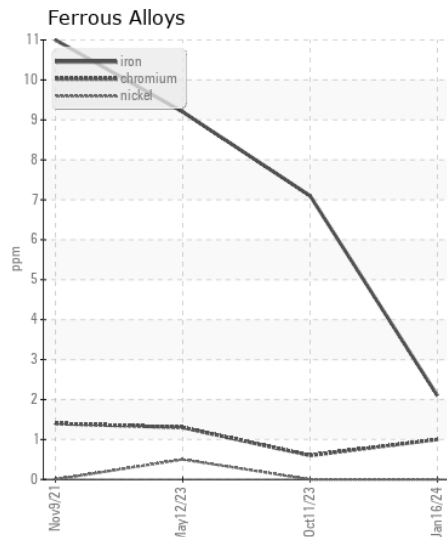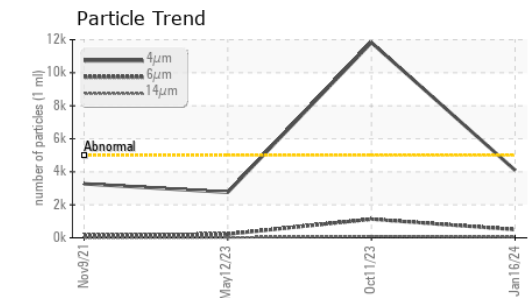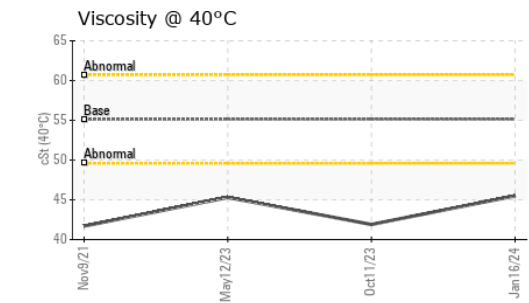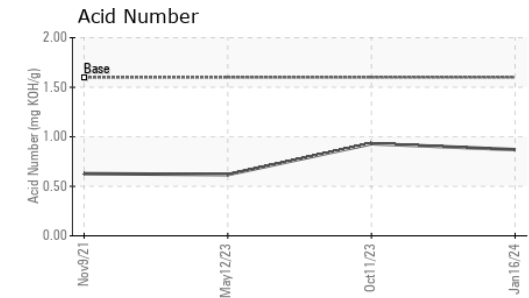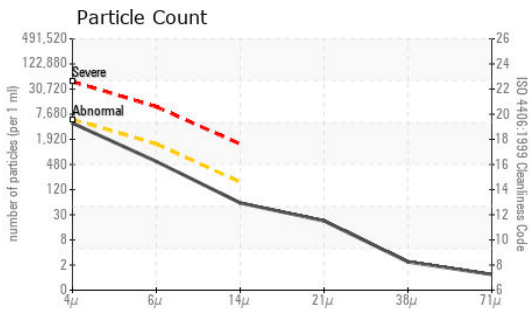

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109742 **Received** : 19 Jan 2024
Lab Number : 06065560 **Diagnosed** : 23 Jan 2024
Unique Number : 10836942 **Diagnostician** : Don Baldridge
Test Package : MOB 2

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: