



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
DT756
Component
Front Differential
Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0113220	PCA0096983	PCA0080921
Sample Date		Client Info		23 Jan 2024	23 May 2023	17 Nov 2022
Machine Age	mls	Client Info		181630	155134	129650
Oil Age	mls	Client Info		155134	101694	101719
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	68	247	137
Chromium	ppm	ASTM D5185m	>8	<1	2	1
Nickel	ppm	ASTM D5185m	>20	2	9	6
Titanium	ppm	ASTM D5185m	>4	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	3	5
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	<1	<1
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>230	19	62	46
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	<1
Boron	ppm	ASTM D5185m		224	220	209
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		22	17	17
Manganese	ppm	ASTM D5185m		0	2	2
Magnesium	ppm	ASTM D5185m		163	64	63
Calcium	ppm	ASTM D5185m		319	146	152
Phosphorus	ppm	ASTM D5185m		1220	1275	1298
Zinc	ppm	ASTM D5185m		261	114	116
Sulfur	ppm	ASTM D5185m		19886	23183	26456
Visc @ 40°C	cSt	ASTM D445	106	75.9	81.2	85.3

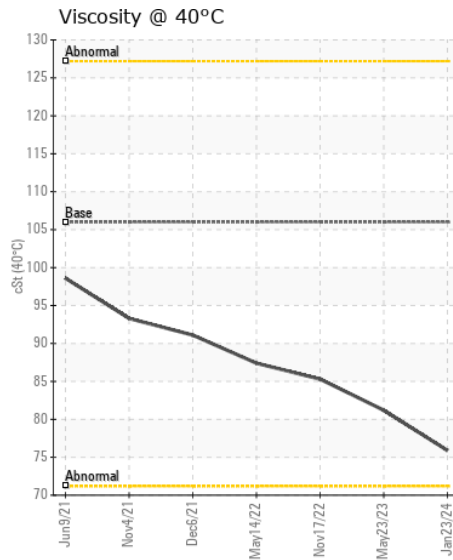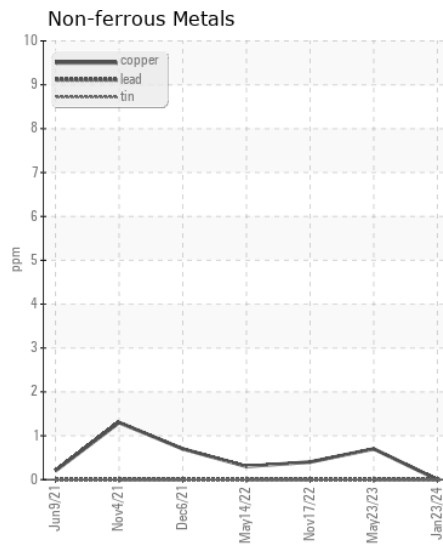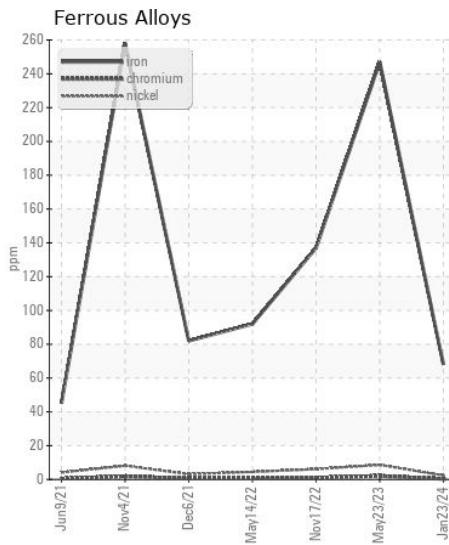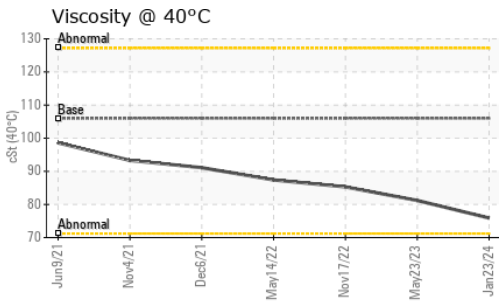

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113220 **Received** : 29 Jan 2024
Lab Number : 06073332 **Diagnosed** : 31 Jan 2024
Unique Number : 10850009 **Diagnostician** : Sean Felton
Test Package : FLEET

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)