



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**427190**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0105514</b>	GFL0089382	GFL0085462
Sample Date		Client Info		<b>24 Jan 2024</b>	05 Aug 2023	07 Jun 2023
Machine Age	mls	Client Info		<b>333869</b>	318792	313198
Oil Age	mls	Client Info		<b>333869</b>	318792	302729
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>25</b>	44	▲ 166
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>6</b>	13	49
Lead	ppm	ASTM D5185m	>50	<b>2</b>	6	20
Copper	ppm	ASTM D5185m	>225	<b>55</b>	103	119
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	6
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>7</b>	7	10
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	6	5
Boron	ppm	ASTM D5185m		<b>14</b>	32	54
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	1	2
Magnesium	ppm	ASTM D5185m		<b>3</b>	6	6
Calcium	ppm	ASTM D5185m		<b>270</b>	272	102
Phosphorus	ppm	ASTM D5185m		<b>423</b>	419	228
Zinc	ppm	ASTM D5185m		<b>21</b>	43	78
Sulfur	ppm	ASTM D5185m		<b>790</b>	979	1114
Visc @ 40°C	cSt	ASTM D445	35.0	<b>27.1</b>	28.3	27.2

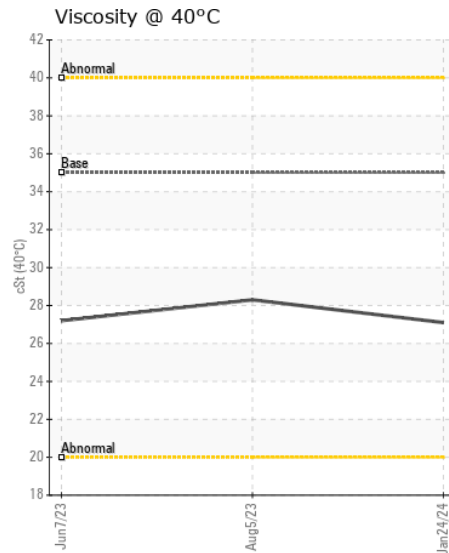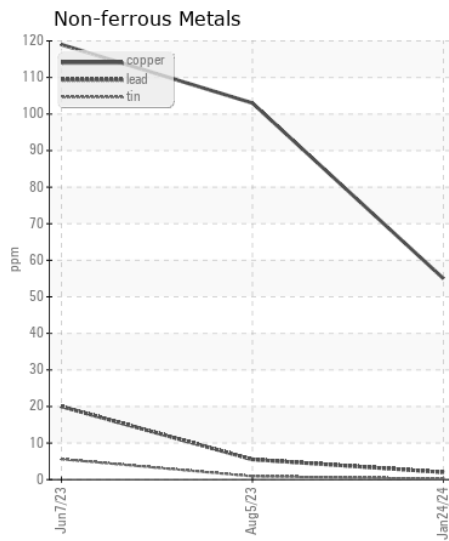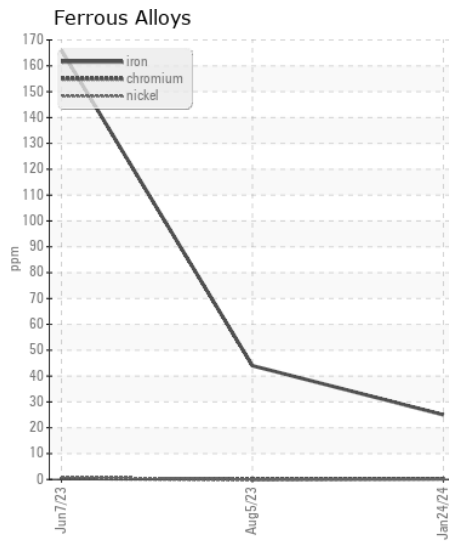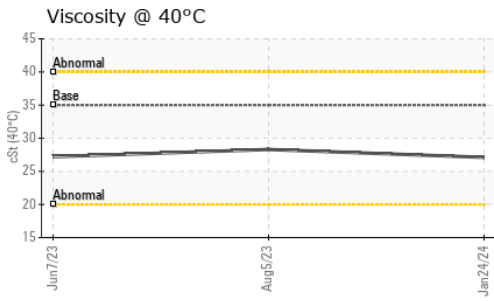

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105514 **Received** : 29 Jan 2024  
**Lab Number** : 06073386 **Diagnosed** : 31 Jan 2024  
**Unique Number** : 10850063 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: