



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
DT756
Component
Transmission (Auto)
Fluid
COGNIS EMGARD 2805 ATF (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0113223	PCA0096984	PCA0080922
Sample Date		Client Info		23 Jan 2024	23 May 2023	17 Nov 2022
Machine Age	mls	Client Info		181630	155134	129650
Oil Age	mls	Client Info		155134	101694	101719
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>220	60	118	88
Chromium	ppm	ASTM D5185m	>2	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>75	19	30	24
Lead	ppm	ASTM D5185m	>95	27	90	78
Copper	ppm	ASTM D5185m	>60	30	53	39
Tin	ppm	ASTM D5185m	>10	2	3	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>25	5	6	9
Potassium	ppm	ASTM D5185m	>20	6	3	4
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	8	7
Boron	ppm	ASTM D5185m		83	189	164
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		4	2	2
Manganese	ppm	ASTM D5185m		0	1	1
Magnesium	ppm	ASTM D5185m		33	16	15
Calcium	ppm	ASTM D5185m		179	159	155
Phosphorus	ppm	ASTM D5185m		289	432	403
Zinc	ppm	ASTM D5185m		45	34	32
Sulfur	ppm	ASTM D5185m		2159	2555	2184
Visc @ 40°C	cSt	ASTM D445	38.9	34.0	34.7	35.1

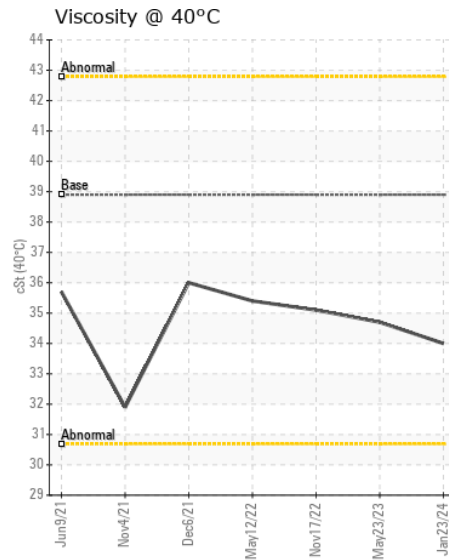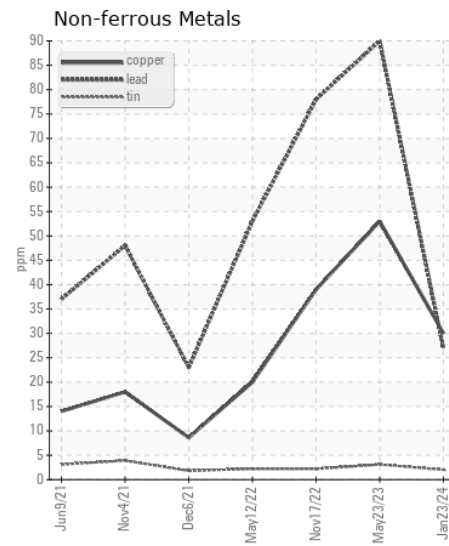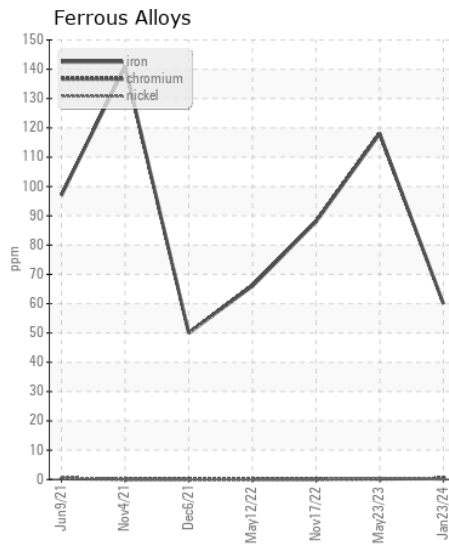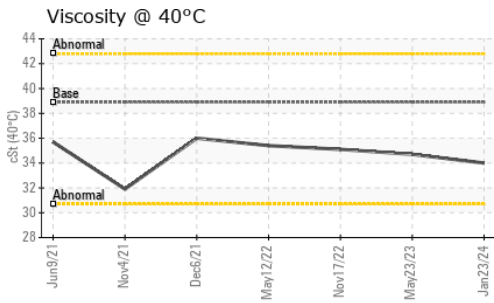

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113223 **Received** : 29 Jan 2024
Lab Number : 06073406 **Diagnosed** : 30 Jan 2024
Unique Number : 10850083 **Diagnostician** : Wes Davis
Test Package : FLEET

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)