



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W024389]
Machine Id
VOLVO A30G 752590
Component
Transmission (Auto)
Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP440937	---	---
Sample Date		Client Info		24 Jan 2024	---	---
Machine Age	hrs	Client Info		1755	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	33	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>50	25	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>225	20	---	---
Tin	ppm	ASTM D5185m	>10	4	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	12	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	187	75	---	---
Barium	ppm	ASTM D5185m	0.0	1	---	---
Molybdenum	ppm	ASTM D5185m	0.0	0	---	---
Manganese	ppm	ASTM D5185m	0.0	2	---	---
Magnesium	ppm	ASTM D5185m	6.8	1	---	---
Calcium	ppm	ASTM D5185m	215	65	---	---
Phosphorus	ppm	ASTM D5185m	445	156	---	---
Zinc	ppm	ASTM D5185m	56	0	---	---
Sulfur	ppm	ASTM D5185m	1336	1703	---	---
Visc @ 40°C	cSt	ASTM D445	35.3	29.1	---	---

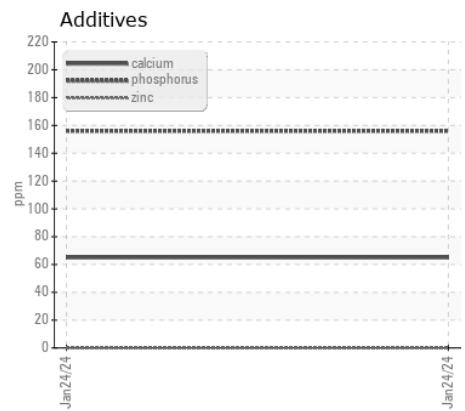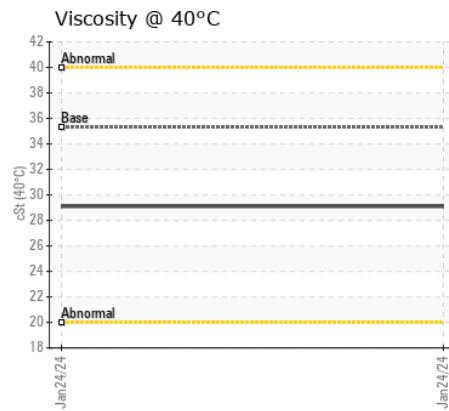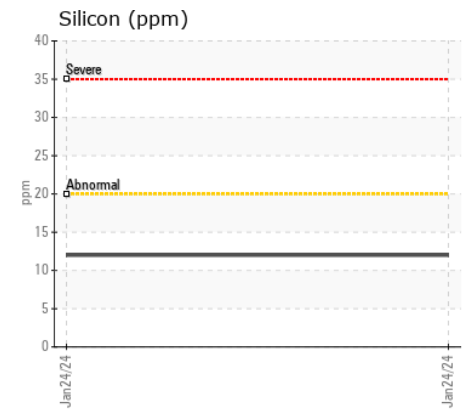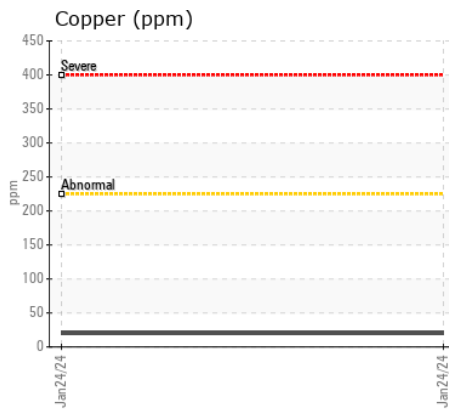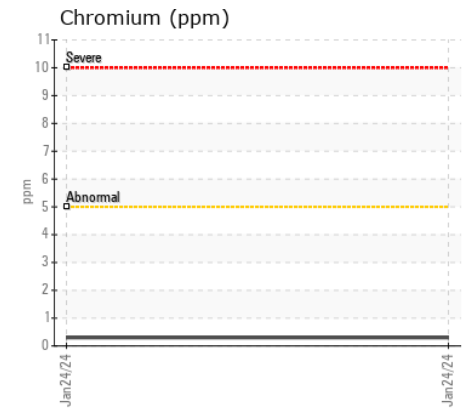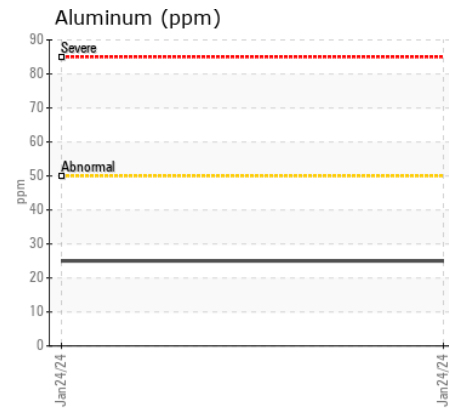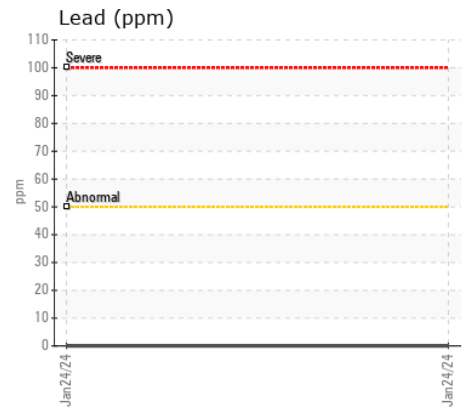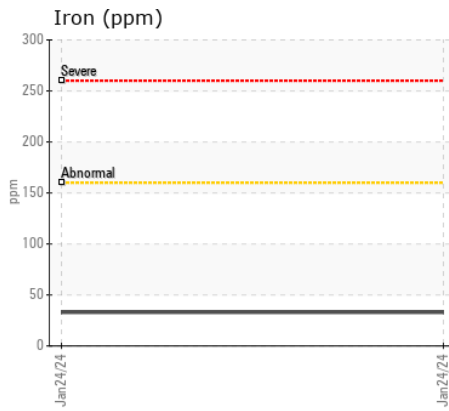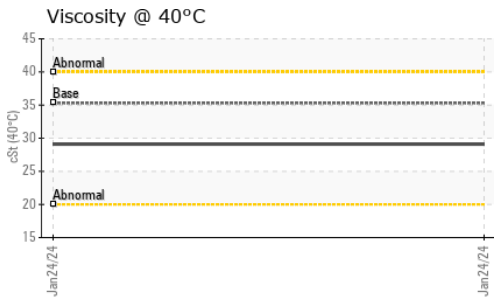

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP440937 **Received** : 29 Jan 2024
Lab Number : 06073415 **Diagnosed** : 31 Jan 2024
Unique Number : 10850092 **Diagnostician** : Don Baldrige
Test Package : MOBCE

LANDMARK CONSTRUCTION CO. INC./MEM
 3255 INDUSTRY DRIVE
 NORTH CHARLESTON, SC
 US 29418
 Contact: GENE RICHARDSON
 grichardson@landmark-sc.com
 T: (843)767-9741
 F: (843)767-9909

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)