



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**023-0202**

Component  
**Diesel Engine**

Fluid  
**SCHAEFFER SUPREME 7000 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0868421</b>	WC0750866	WC0698224
Sample Date		Client Info		<b>18 Jan 2024</b>	07 Nov 2022	06 May 2022
Machine Age	hrs	Client Info		<b>7262</b>	7179	6962
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>&lt;1</b>	3	4
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	7	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.8</b>	9	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.5</b>	18.8	19.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	2	4
Boron	ppm	ASTM D5185m		<b>97</b>	88	93
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>70</b>	69	74
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1000	<b>15</b>	18	19
Calcium	ppm	ASTM D5185m	1400	<b>2048</b>	2134	2374
Phosphorus	ppm	ASTM D5185m	985	<b>981</b>	956	1111
Zinc	ppm	ASTM D5185m	1060	<b>1158</b>	1190	1373
Sulfur	ppm	ASTM D5185m	4000	<b>4765</b>	5701	4723
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.9</b>	15.1	15.7
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>6.8</b>	7.4	7.6
Visc @ 100°C	cSt	ASTM D445	15	<b>14.7</b>	14.5	14.9

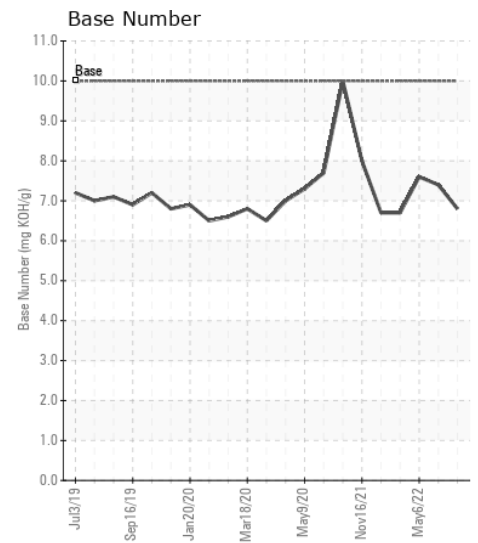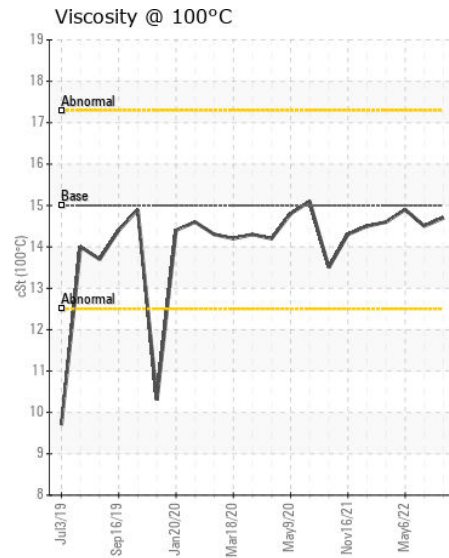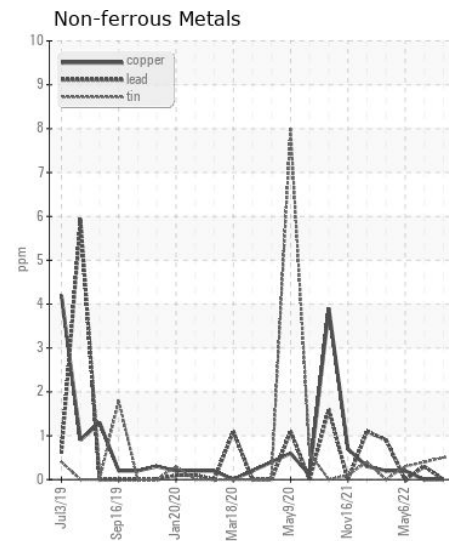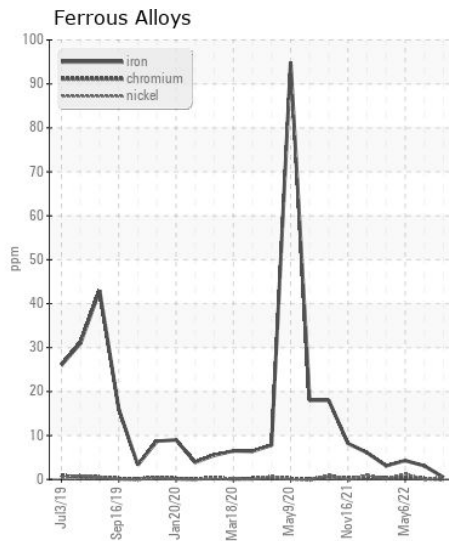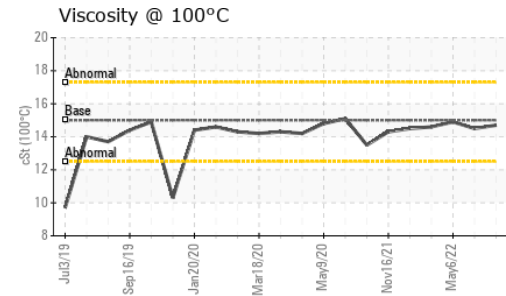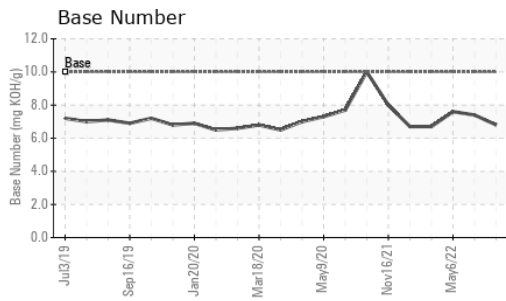

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0868421 **Received** : 30 Jan 2024  
**Lab Number** : 06073599 **Diagnosed** : 30 Jan 2024  
**Unique Number** : 10850276 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHIMMICK CONSTRUCTION**  
 5535 TRAILHEAD DRIVE  
 CHATTANOOGA, TN  
 US 37415  
 Contact: DANIEL LISELLA  
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: