



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**425018-703**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (12 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0054126</b>	GFL0029268	---
Sample Date		Client Info		<b>26 Jan 2024</b>	15 Sep 2021	---
Machine Age	hrs	Client Info		<b>12428</b>	10750	---
Oil Age	hrs	Client Info		<b>1169</b>	665	---
Filter Age	hrs	Client Info		<b>1169</b>	665	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>49</b>	27	---
Chromium	ppm	ASTM D5185m	>20	<b>4</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	6	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	6	---
Lead	ppm	ASTM D5185m	>40	<b>9</b>	3	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	1	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>7</b>	11	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	15	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	9.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	20.7	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	<1	---
Boron	ppm	ASTM D5185m	0	<b>3</b>	21	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	60	<b>65</b>	62	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	1010	<b>912</b>	870	---
Calcium	ppm	ASTM D5185m	1070	<b>1270</b>	1269	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1136</b>	1023	---
Zinc	ppm	ASTM D5185m	1270	<b>1379</b>	1169	---
Sulfur	ppm	ASTM D5185m	2060	<b>3067</b>	2739	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.3</b>	16.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.0</b>	7.6	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.7	---

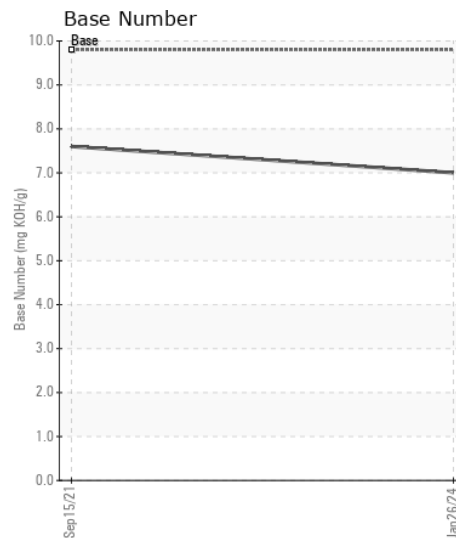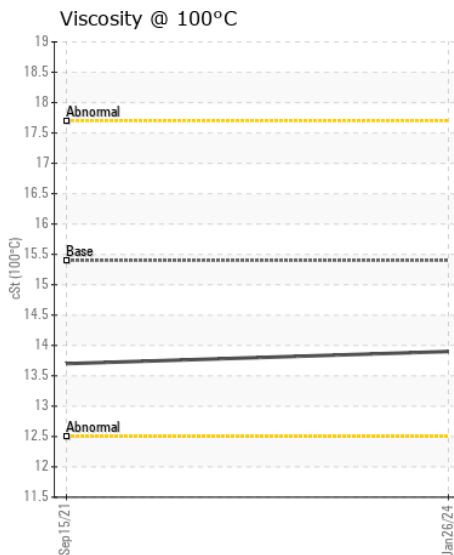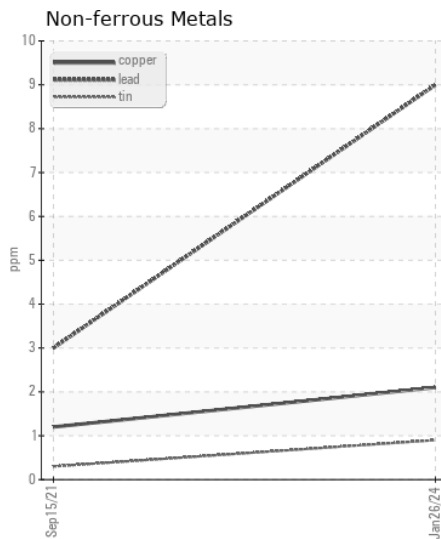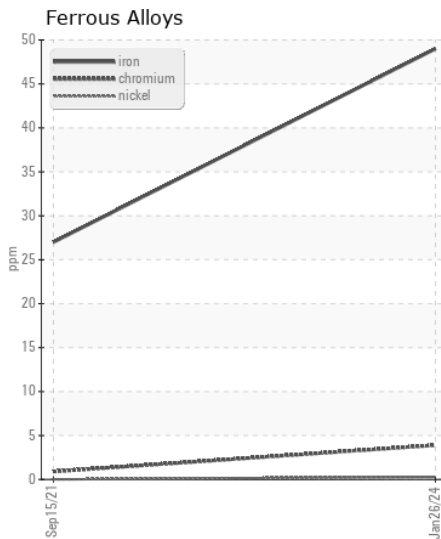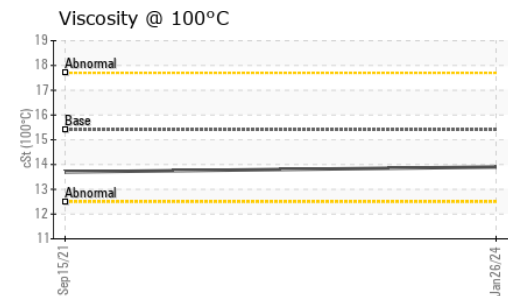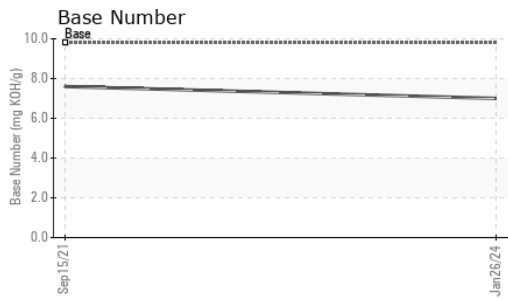

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0054126 **Received** : 30 Jan 2024  
**Lab Number** : 06073651 **Diagnosed** : 30 Jan 2024  
**Unique Number** : 10850328 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 630 - Northern A1 PA**  
 117 Moonlite Dr  
 Smithfield, PA  
 US 15478  
 Contact: MIKE NEWMAN  
 miken@northern1.com  
 T: (231)564-2362  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)