



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
4920818
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06073758	IL05643493	IL05330599
Sample Date		Client Info		29 Jan 2024	15 Sep 2022	23 Jul 2021
Machine Age	mls	Client Info		0	0	28204
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	40	30	88
Chromium	ppm	ASTM D5185m	>20	<1	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	6	6	17
Lead	ppm	ASTM D5185m	>40	2	1	5
Copper	ppm	ASTM D5185m	>330	3	15	131
Tin	ppm	ASTM D5185m	>15	1	1	5
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	7	14
Potassium	ppm	ASTM D5185m	>20	4	0	10
Fuel		WC Method	>5	<1.0	<1.0	0.1
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	2	1.3	2
Nitration	Abs/cm	*ASTM D7624	>20	12.4	12.8	16.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.3	26.2	26.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	4
Boron	ppm	ASTM D5185m	250	24	19	16
Barium	ppm	ASTM D5185m	10	0	<1	0
Molybdenum	ppm	ASTM D5185m	100	50	45	47
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m	450	489	539	526
Calcium	ppm	ASTM D5185m	3000	1625	1642	1635
Phosphorus	ppm	ASTM D5185m	1150	691	756	695
Zinc	ppm	ASTM D5185m	1350	930	942	908
Sulfur	ppm	ASTM D5185m	4250	2469	2513	1802
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.5	24.2	25
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	11.3	10.9	8.6
Visc @ 100°C	cSt	ASTM D445	10.9	12.1	11.7	11.6

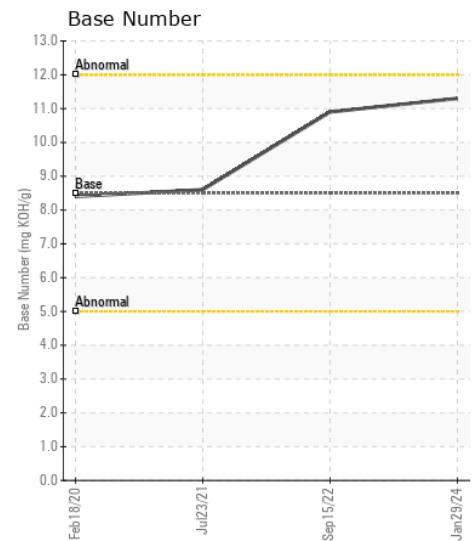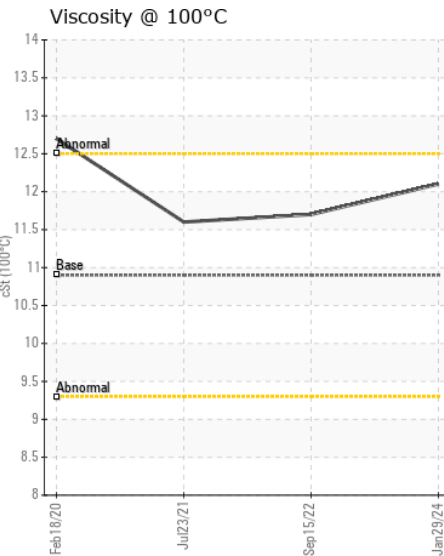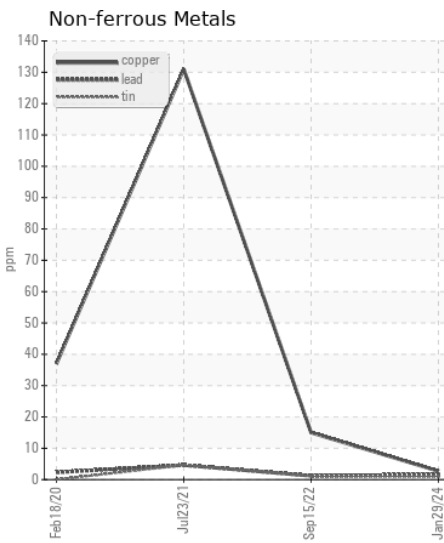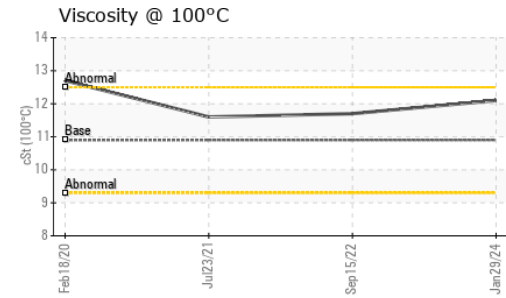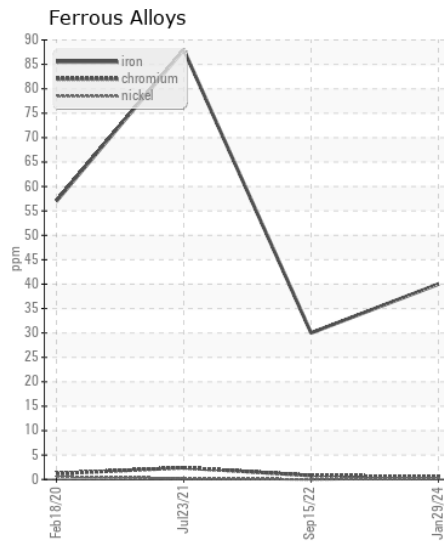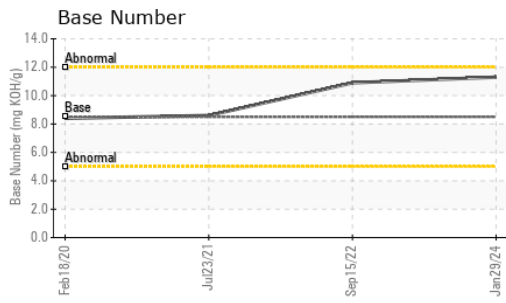

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06073758 **Received** : 30 Jan 2024
Lab Number : 06073758 **Diagnosed** : 31 Jan 2024
Unique Number : 10855849 **Diagnostician** : Wes Davis
Test Package : FLEET

IDEALEASE-NORCROSS
 4571 NORTH BUFORD HWY
 NORCROSS, GA
 US 30071-2808
 Contact: RICK MARKS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (770)300-0614