



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH60C 1528-132602
Component
Diesel Engine
Fluid
CHEVRON SUPREME MOTOR OIL 5W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0210075	LH0210073	LH0210066
Sample Date		Client Info		22 Jan 2024	18 Nov 2023	22 Sep 2023
Machine Age	hrs	Client Info		5938	5527	5266
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	3	<1	4
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	3	0
Lead	ppm	ASTM D5185m	>30	<1	0	<1
Copper	ppm	ASTM D5185m	>125	1	<1	<1
Tin	ppm	ASTM D5185m	>5	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	7	7	8
Potassium	ppm	ASTM D5185m	>20	5	1	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.2	6.6	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	20.0	20.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	<1	<1
Boron	ppm	ASTM D5185m		112	425	424
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		6	81	82
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		656	402	391
Calcium	ppm	ASTM D5185m		1306	1407	1398
Phosphorus	ppm	ASTM D5185m	780	646	1077	988
Zinc	ppm	ASTM D5185m	860	810	1306	1211
Sulfur	ppm	ASTM D5185m		2949	3401	3241
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.2	14.4	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	7.8	7.2	7.6	7.1
Visc @ 100°C	cSt	ASTM D445	9.7	11.7	13.4	13.1

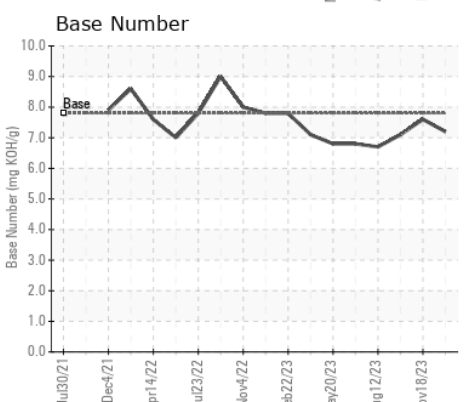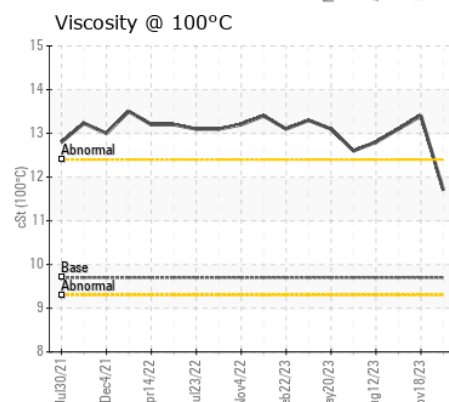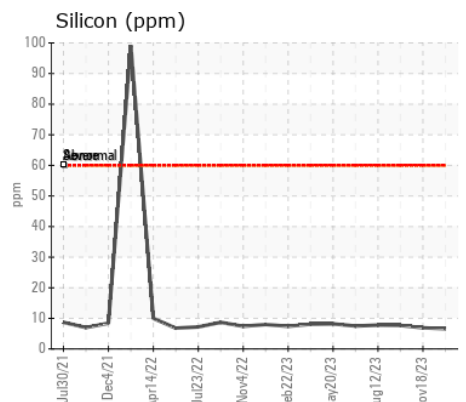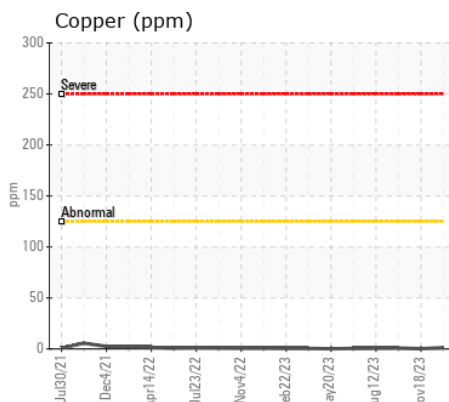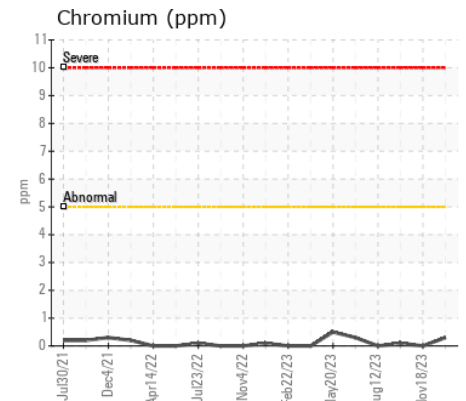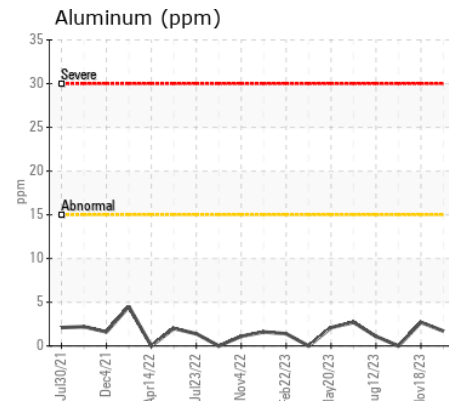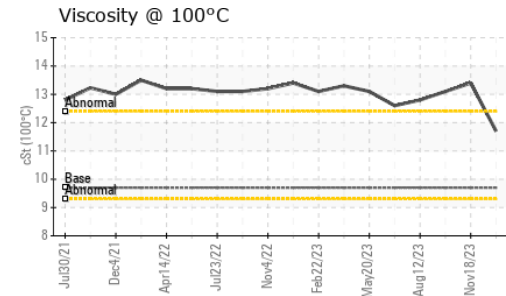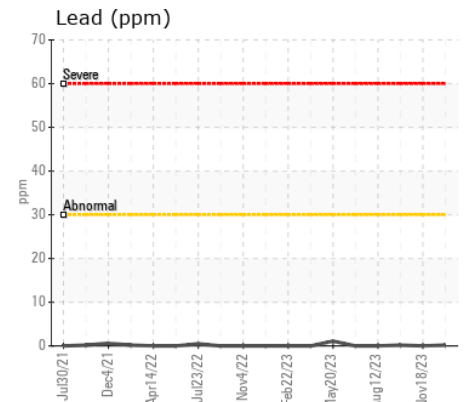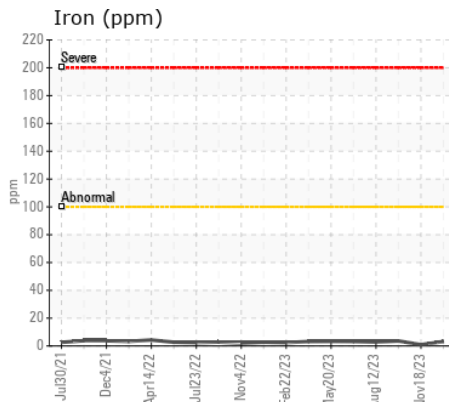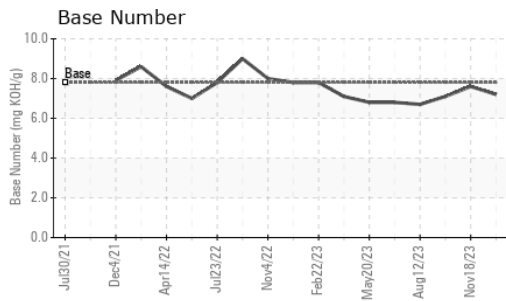

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0210075 **Received** : 30 Jan 2024
Lab Number : 06073794 **Diagnosed** : 31 Jan 2024
Unique Number : 10855885 **Diagnostician** : Don Baldrige
Test Package : MOBCE (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

STAIMAN RECYCLING
 201 HEPBURN ST
 WILLIAMSPORT, PA
 US 17701
 Contact: JOE MARKLEY
 jmarkleysr@staimanrecycling.com
 T: (570)419-5479
 F: