



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W20783-ALL-IN-ONE]
 Machine Id
JOHN DEERE 650K 1T0650KKPJF335832
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0190487	---	---
Sample Date		Client Info		22 Jan 2024	---	---
Machine Age	hrs	Client Info		2832	---	---
Oil Age	hrs	Client Info		2	---	---
Filter Age	hrs	Client Info		2	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	10	---	---
Iron	ppm	ASTM D5185m	>23	<1	---	---
Chromium	ppm	ASTM D5185m	>9	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	0	---	---
Lead	ppm	ASTM D5185m	>28	<1	---	---
Copper	ppm	ASTM D5185m	>51	7	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>31	<1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	3667	---	---
Particles >6µm		ASTM D7647	>20000	765	---	---
Particles >14µm		ASTM D7647	>640	35	---	---
Particles >21µm		ASTM D7647	>160	7	---	---
Particles >38µm		ASTM D7647	>40	0	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	19/17/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m	87	473	---	---
Phosphorus	ppm	ASTM D5185m	727	665	---	---
Zinc	ppm	ASTM D5185m	900	890	---	---
Sulfur	ppm	ASTM D5185m	1500	1859	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.85	---	---
Visc @ 40°C	cSt	ASTM D445	65	56.0	---	---

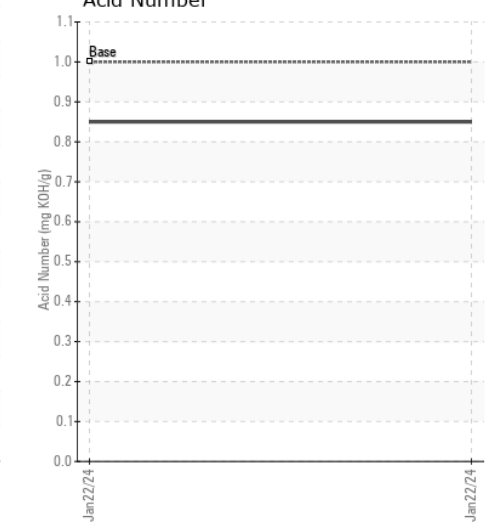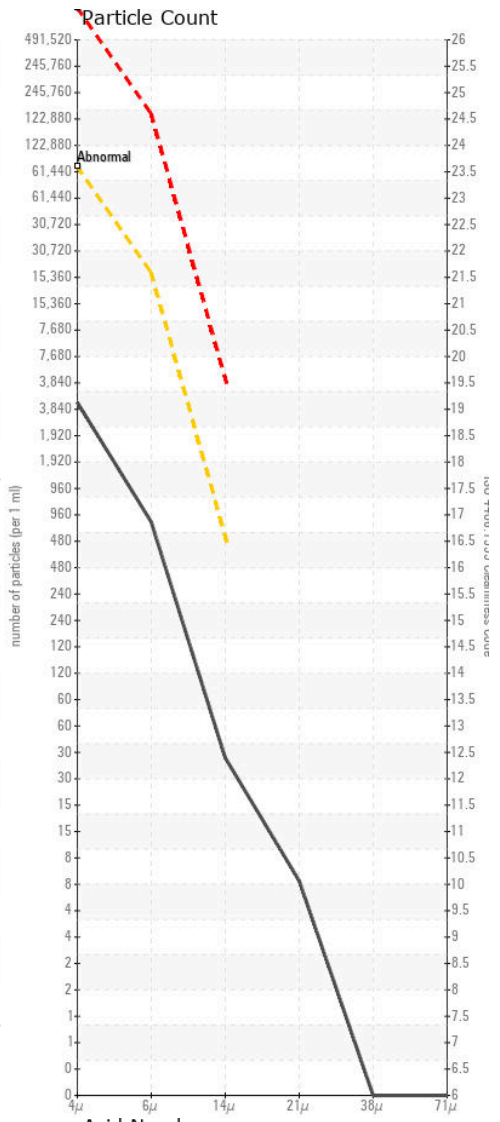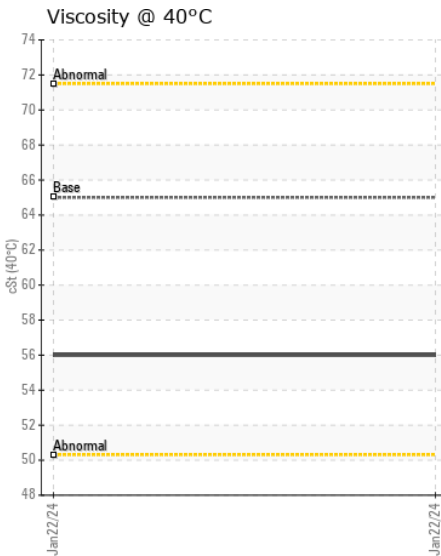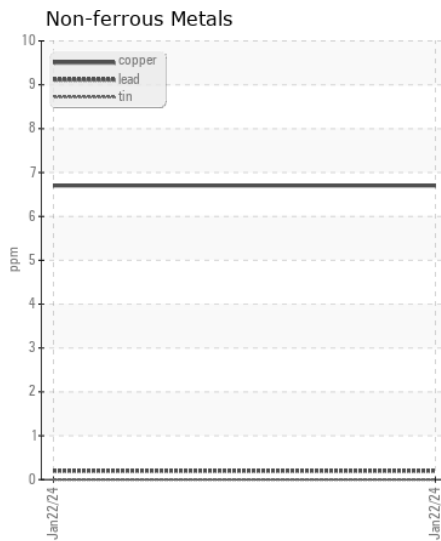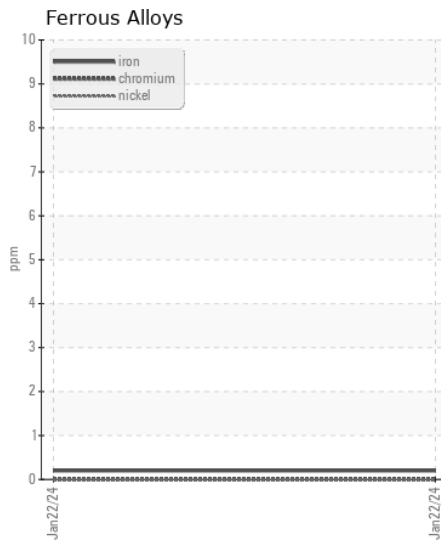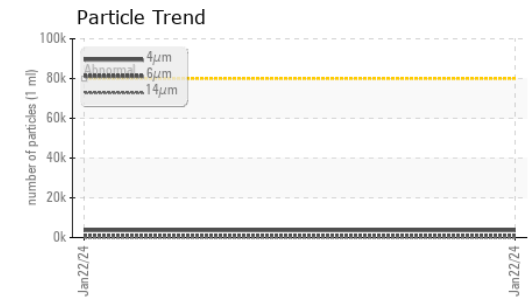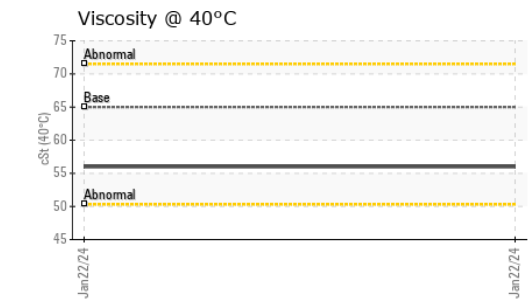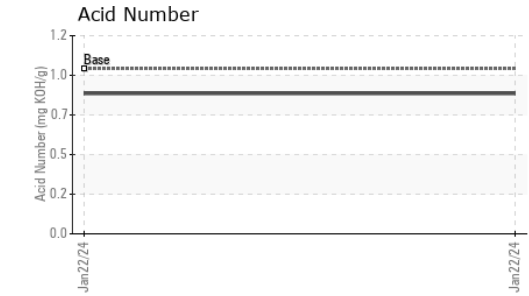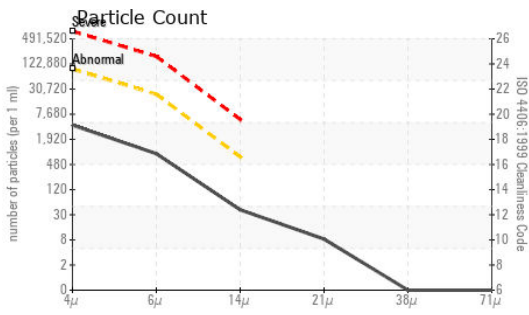

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0190487 **Received** : 30 Jan 2024
Lab Number : 06073810 **Diagnosed** : 31 Jan 2024
Unique Number : 10855901 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - BURKEVILLE
 510 WEST COLONIAL DR
 BURKEVILLE, VA
 US 23922

Contact: BRANDON BOLLING
 bbolling@jamesriverequipment.com
 T: (434)767-5578
 F: (434)767-3774

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)