



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CR-6609
Component
Rear Right Track Drive
Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0873372	WC0405530	---
Sample Date		Client Info		08 Jan 2024	23 Jan 2021	---
Machine Age	hrs	Client Info		17421	51616	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---
<hr/>						
Iron	ppm	ASTM D5185m	>1000	49	62	---
Chromium	ppm	ASTM D5185m	>30	<1	<1	---
Nickel	ppm	ASTM D5185m	>7	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>25	2	2	---
Lead	ppm	ASTM D5185m	>50	0	3	---
Copper	ppm	ASTM D5185m	>100	12	29	---
Tin	ppm	ASTM D5185m	>5	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	MODER	---
<hr/>						
Silicon	ppm	ASTM D5185m	>150	15	7	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
<hr/>						
Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m	50	6	188	---
Barium	ppm	ASTM D5185m	15	0	<1	---
Molybdenum	ppm	ASTM D5185m	15	3	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	50	3	<1	---
Calcium	ppm	ASTM D5185m	50	14	10	---
Phosphorus	ppm	ASTM D5185m	350	393	1079	---
Zinc	ppm	ASTM D5185m	100	0	9	---
Sulfur	ppm	ASTM D5185m	12500	6177	16856	---
Visc @ 40°C	cSt	ASTM D445	220	214	244	---

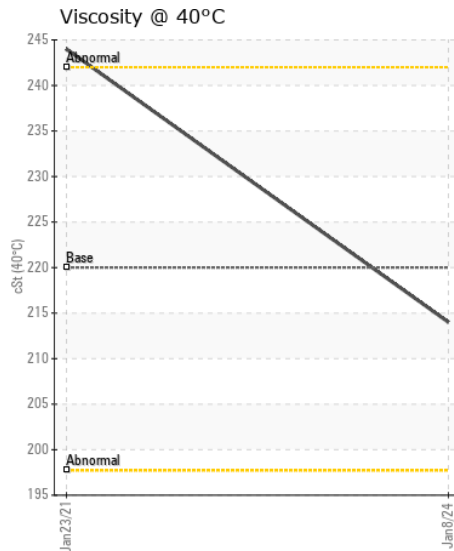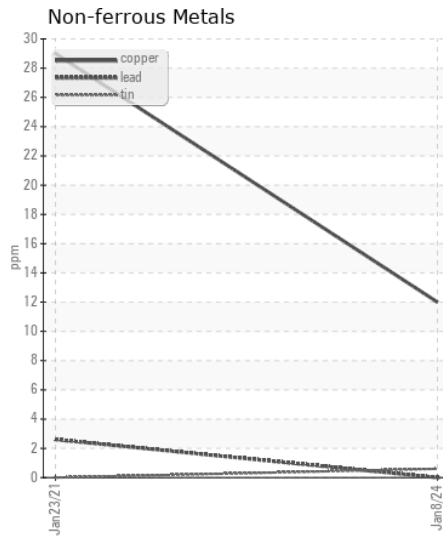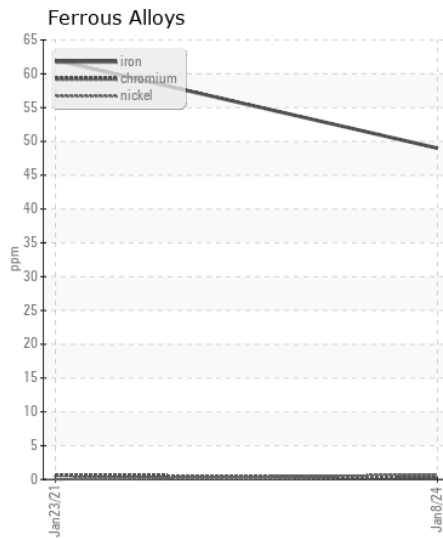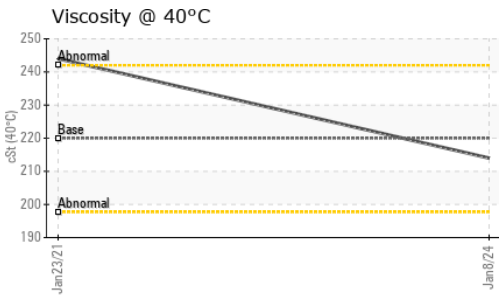

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0873372 **Received** : 30 Jan 2024
Lab Number : 06074224 **Diagnosed** : 31 Jan 2024
Unique Number : 10856315 **Diagnostician** : Wes Davis
Test Package : CONST

BUCKNER HEAVY LIFT

4732 NC 54 EAST
GRAHAM, NC
US 27253-9215

Contact: MICHAEL LAWSON
michaell@bucknercompanies.com

T: (336)376-8888
F: (336)376-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)