



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[46711 DCF]
Machine Id
VOLVO EC350 310329
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439090	VCP308244	VCP283341
Sample Date		Client Info		25 Jan 2024	28 Apr 2021	06 Jul 2020
Machine Age	hrs	Client Info		6518	3834	3070
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	6	14
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	5	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	0	2
Lead	ppm	ASTM D5185m	>20	1	2	0
Copper	ppm	ASTM D5185m	>15	2	2	2
Tin	ppm	ASTM D5185m	>10	<1	1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	6	4	7
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Fuel	%	ASTM D3524	>6.0	<1.0	1.2	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	9.8	9.9	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	23.6	22.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	1	3
Boron	ppm	ASTM D5185m	2.5	21	27	31
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	40	36	28
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	256	470	494	579
Calcium	ppm	ASTM D5185m	2057	1619	1627	1616
Phosphorus	ppm	ASTM D5185m	935	879	914	830
Zinc	ppm	ASTM D5185m	1223	1087	1046	918
Sulfur	ppm	ASTM D5185m	4079	2808	2523	2987
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.3	23.2	18.4
Base Number (BN)	mg KOH/g	ASTM D2896	10	7.0	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	▲ 12.3	▲ 12.0	12.4


▲ Viscosity @ 100°C

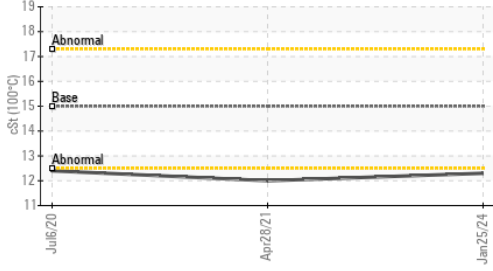


Iron (ppm)

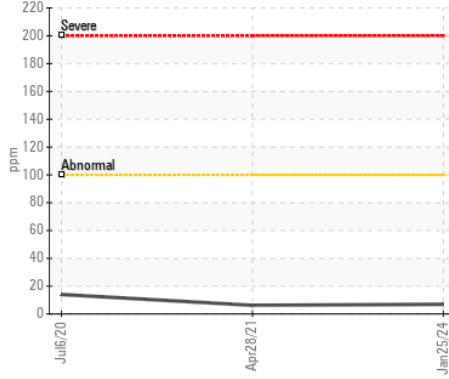


Lead (ppm)

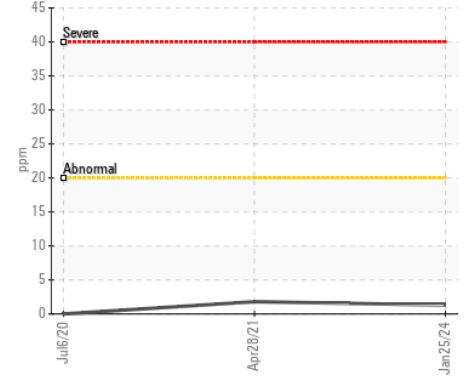


Base Number

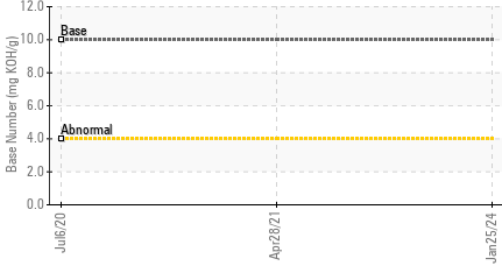


Aluminum (ppm)

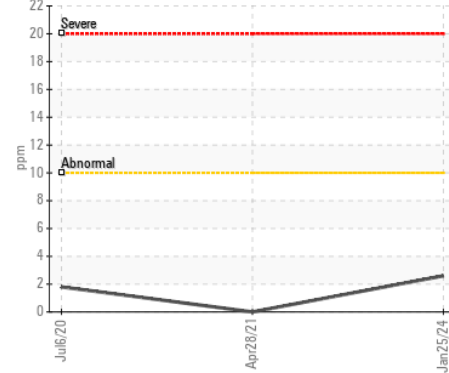


Chromium (ppm)

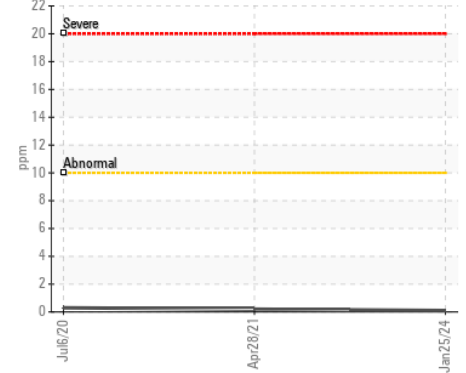


Fuel Dilution

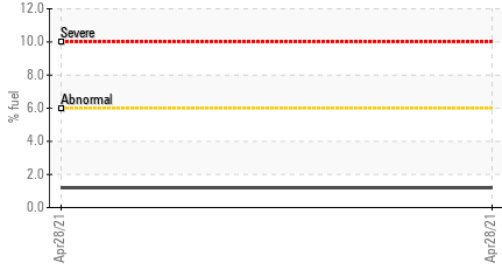


Copper (ppm)

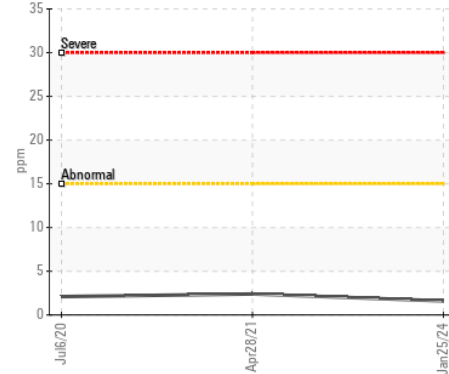


Silicon (ppm)

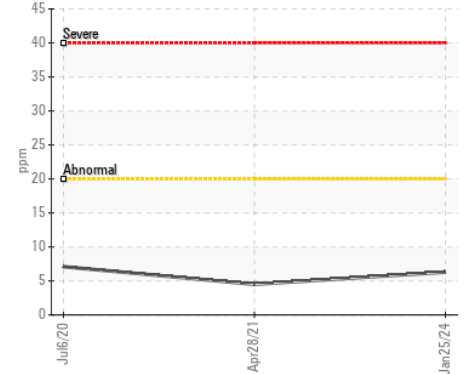

▲ Viscosity @ 100°C

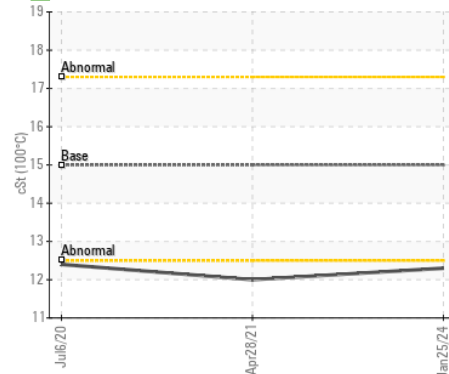

Base Number

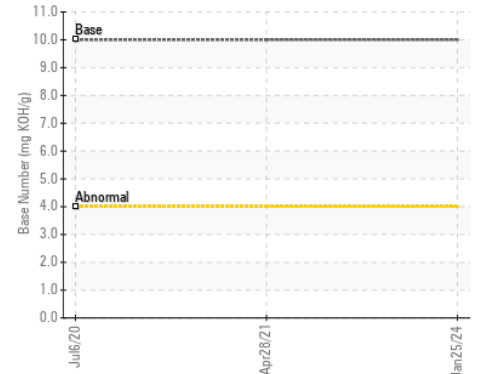

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439090 **Received** : 30 Jan 2024
Lab Number : 06074295 **Diagnosed** : 31 Jan 2024
Unique Number : 10856386 **Diagnostician** : Don Baldridge
Test Package : MOB 1 (Additional Tests: FuelDilution, TBN)

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)