



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[BEN SHORT]

Machine Id

JOHN DEERE 3033R 1LV3033RYHH400756 (S/N 1LV1033RYHH400756)

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0169352	JR0151991	JR0112500
Sample Date		Client Info		17 Jan 2024	25 Jan 2023	14 Jan 2022
Machine Age	hrs	Client Info		385	346	300
Oil Age	hrs	Client Info		38	46	42
Filter Age	hrs	Client Info		38	46	42
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	1	3	5
Chromium	ppm	ASTM D5185m	>11	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	5	2	3
Lead	ppm	ASTM D5185m	>26	0	<1	<1
Copper	ppm	ASTM D5185m	>26	0	<1	<1
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	7	6	7
Potassium	ppm	ASTM D5185m	>20	<1	1	2
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.3	6.4	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	19.1	21.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<1	2	2
Boron	ppm	ASTM D5185m		300	288	288
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		239	243	254
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		813	791	932
Calcium	ppm	ASTM D5185m		1354	1394	1591
Phosphorus	ppm	ASTM D5185m		859	877	1005
Zinc	ppm	ASTM D5185m		1049	1060	1104
Sulfur	ppm	ASTM D5185m		2937	3610	2998
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	14.3	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.8	9.7	11.3
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.0	13.3

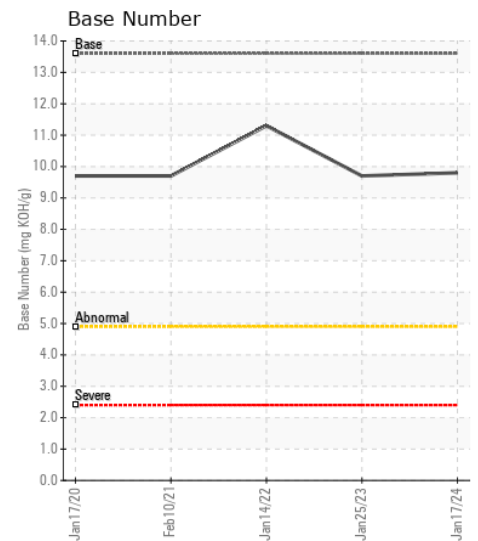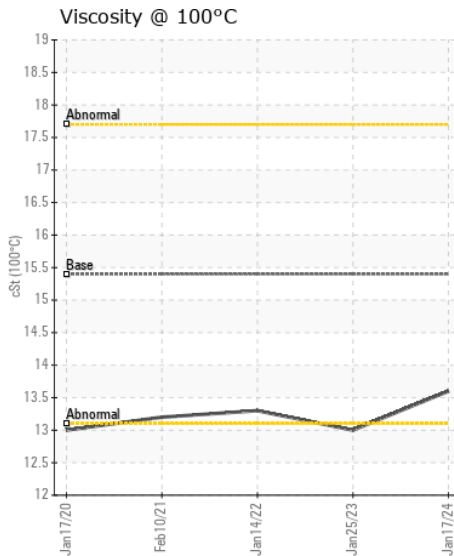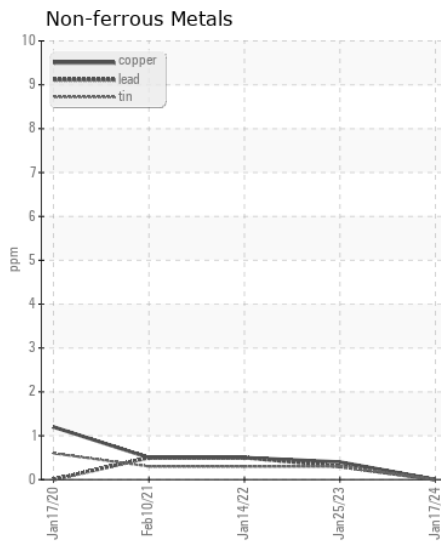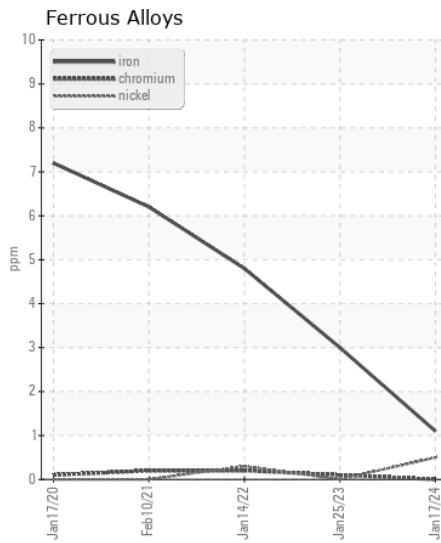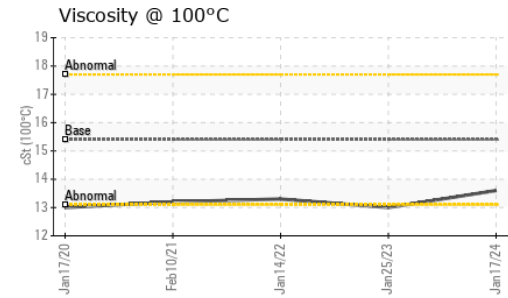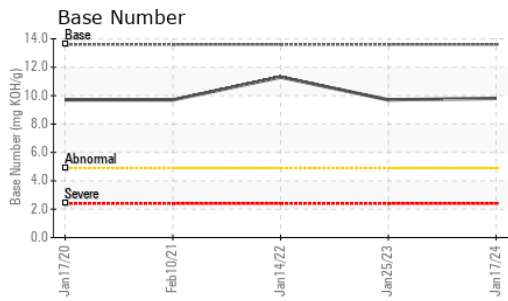

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0169352 **Received** : 30 Jan 2024
Lab Number : 06074348 **Diagnosed** : 31 Jan 2024
Unique Number : 10856439 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - EDINBURG
 601 NORTH MAIN ST
 WOODSTOCK, VA
 US 22664

Contact: MIKE SECHLER
 MSECHLER@JAMESRIVEREQUIPMENT.COM

T:
 F: