



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
5C07
Machine Id
FORD F550 TVK9987 (S/N 1FDUF5GT0JDA07706)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (14 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ARI0007590	ARI0006477	ARI0006357
Sample Date		Client Info		05 Jan 2024	21 Sep 2023	29 Jun 2023
Machine Age	mls	Client Info		62895	59500	57800
Oil Age	mls	Client Info		0	11700	4100
Filter Age	mls	Client Info		0	11700	4100
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	12	18	25
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	3	4
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	8	9
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	10.1	11.0	12.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	21.2	24.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	4	5	3
Boron	ppm	ASTM D5185m	250	3	18	22
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	58	59	62
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	960	1028	1127
Calcium	ppm	ASTM D5185m	3000	1005	859	909
Phosphorus	ppm	ASTM D5185m	1150	993	994	1081
Zinc	ppm	ASTM D5185m	1350	1268	1211	1349
Sulfur	ppm	ASTM D5185m	4250	2943	3101	4010
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.2	21.5	26.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.6	6.9	7.1
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	12.6	12.6

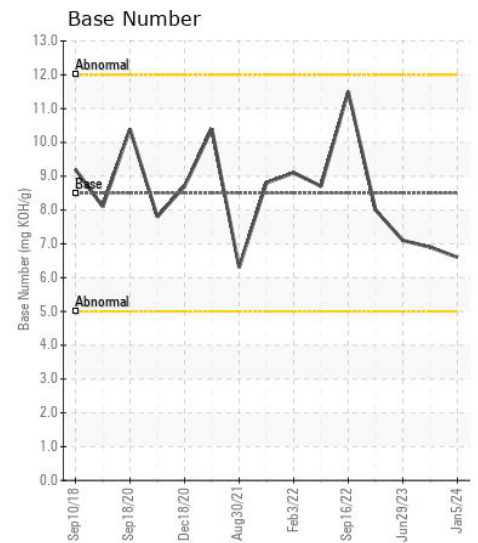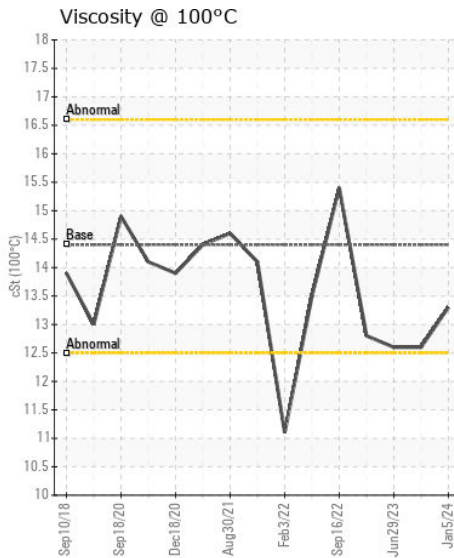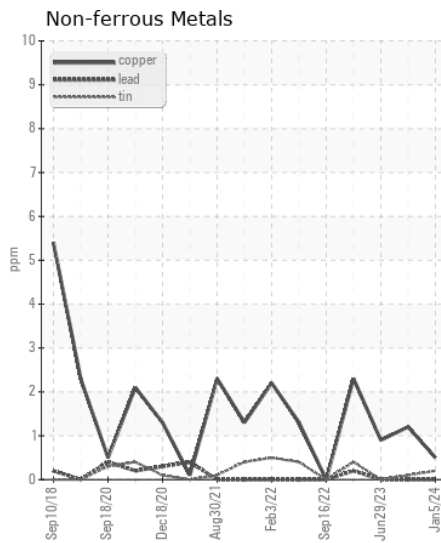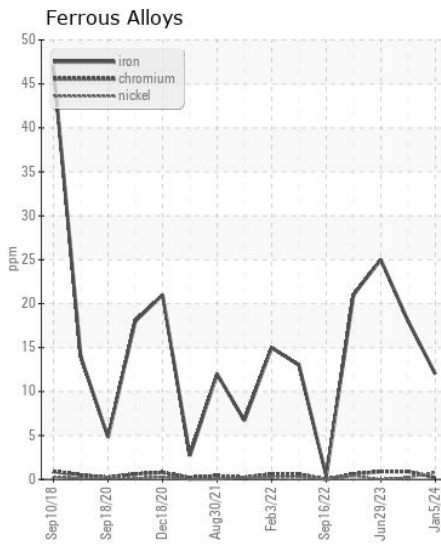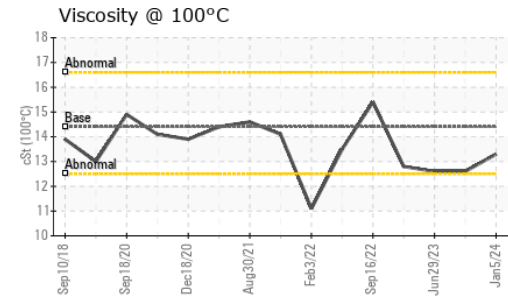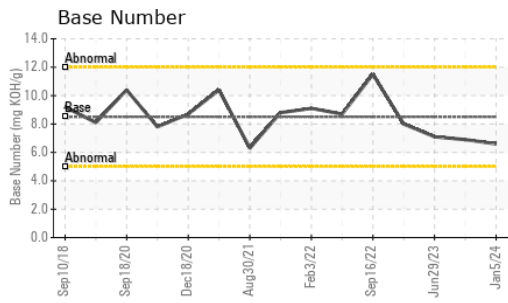

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ARI0007590 **Received** : 30 Jan 2024
Lab Number : 06074400 **Diagnosed** : 31 Jan 2024
Unique Number : 10856491 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

INSITUFORM TECHNOLOGIES, INC
 12820 PENNRIDGE DRIVE
 BRIDGETON, MO
 US 63044
 Contact: RYAN MAINARD
 RMAINARD@INSITUFORM.COM
 T: (816)590-9477
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)