



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
227061-632106

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096005	GFL0071731	GFL0071743
Sample Date		Client Info		29 Jan 2024	12 Sep 2023	12 Jun 2023
Machine Age	mls	Client Info		85515	77641	75510
Oil Age	mls	Client Info		600	10000	600
Filter Age	mls	Client Info		600	10000	600
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	34	26	43
Chromium	ppm	ASTM D5185m	>20	1	1	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	11	6	8
Lead	ppm	ASTM D5185m	>40	12	9	17
Copper	ppm	ASTM D5185m	>330	3	3	6
Tin	ppm	ASTM D5185m	>15	1	1	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	8	8
Potassium	ppm	ASTM D5185m	>20	6	11	8
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.8	1	2.3
Nitration	Abs/cm	*ASTM D7624	>20	16.0	11.7	17.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.8	21.8	29.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		13	5	6
Boron	ppm	ASTM D5185m	0	12	23	7
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	51	54	54
Manganese	ppm	ASTM D5185m	0	2	1	2
Magnesium	ppm	ASTM D5185m	1010	580	632	561
Calcium	ppm	ASTM D5185m	1070	1515	1652	1732
Phosphorus	ppm	ASTM D5185m	1150	781	915	704
Zinc	ppm	ASTM D5185m	1270	1001	1078	930
Sulfur	ppm	ASTM D5185m	2060	2432	3311	2812
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.8	19.0	28.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.0	8.5	6.7
Visc @ 100°C	cSt	ASTM D445	15.4	15.0	14.9	15.2

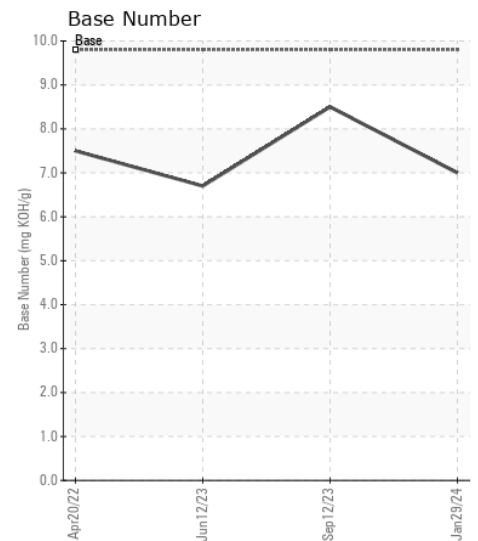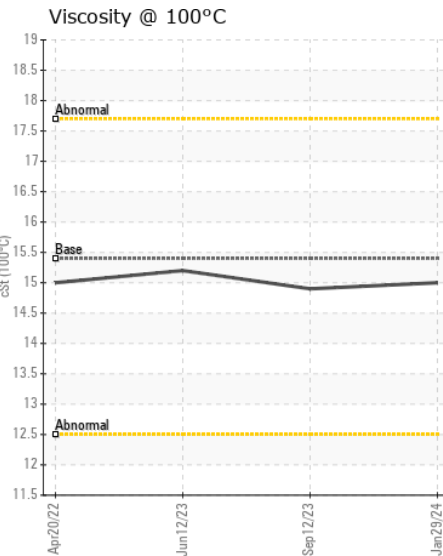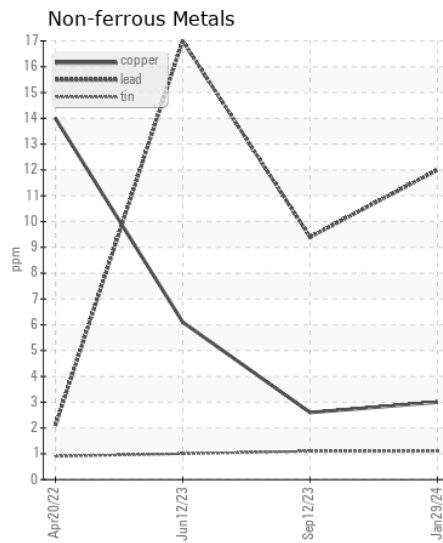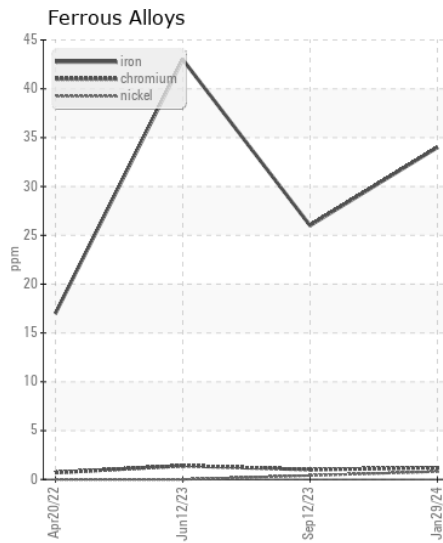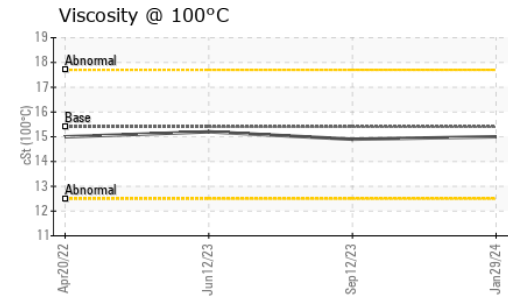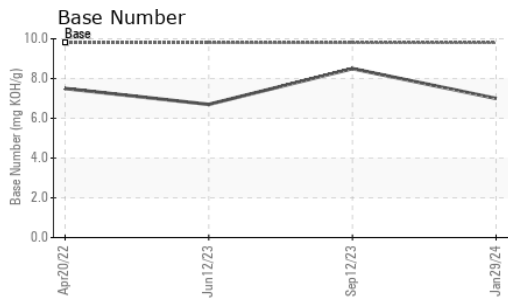

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0096005 **Received** : 30 Jan 2024
Lab Number : 06074441 **Diagnosed** : 01 Feb 2024
Unique Number : 10856532 **Diagnostician** : Jonathan Hester
Test Package : FLEET

GFL Environmental - 883 - Orange City
 1378 South Volusia Ave
 Orange City, FL
 US 32763
 Contact: JEFF COOPERSMITH
 JCOOPERSMITH@GFLENV.COM
 T: (386)503-8468
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)