



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TOYOTA STFRX5GN8GX059980

Component
Gasoline Engine

Fluid
FRAM 0W20 FULL SYN (6 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WCM1396342	---	---
Sample Date		Client Info		21 Jan 2024	---	---
Machine Age	hrs	Client Info		128918	---	---
Oil Age	hrs	Client Info		5000	---	---
Filter Age	hrs	Client Info		5000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	9	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>5	1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	10	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>155	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	13	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	13.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	2	---	---
Boron	ppm	ASTM D5185m		3	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		58	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		411	---	---
Calcium	ppm	ASTM D5185m		875	---	---
Phosphorus	ppm	ASTM D5185m		549	---	---
Zinc	ppm	ASTM D5185m		645	---	---
Sulfur	ppm	ASTM D5185m		1718	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.6	---	---
Visc @ 100°C	cSt	ASTM D445		7.7	---	---

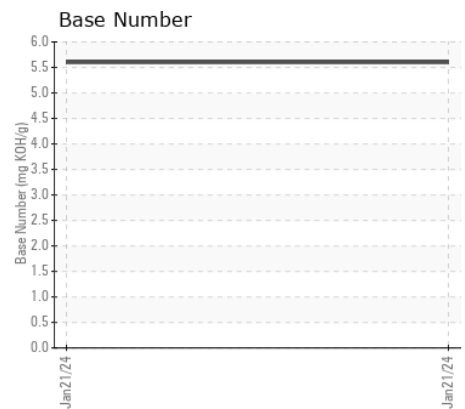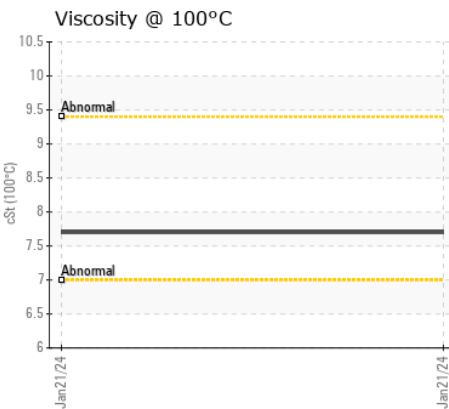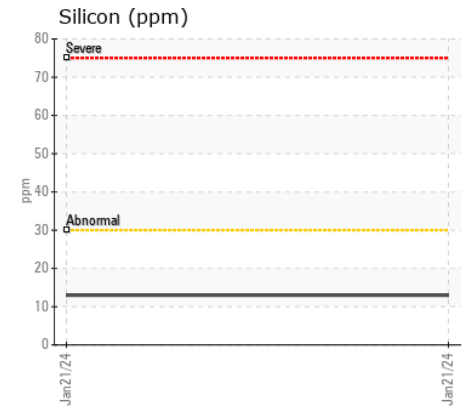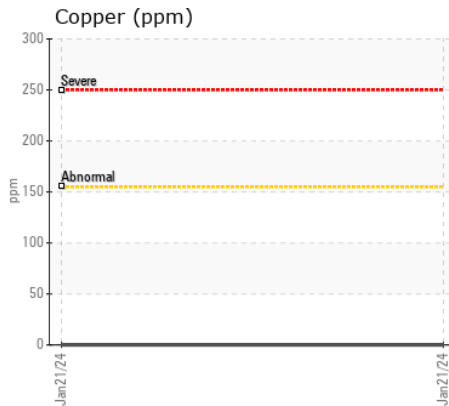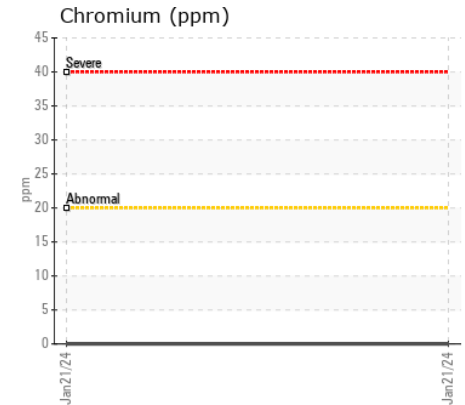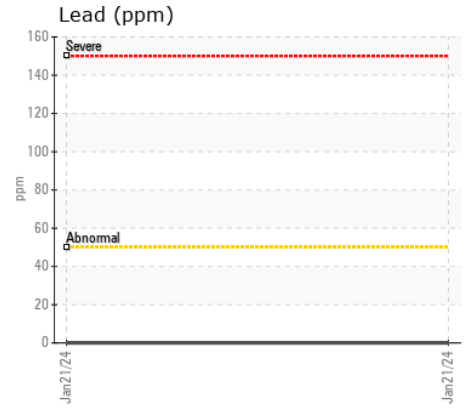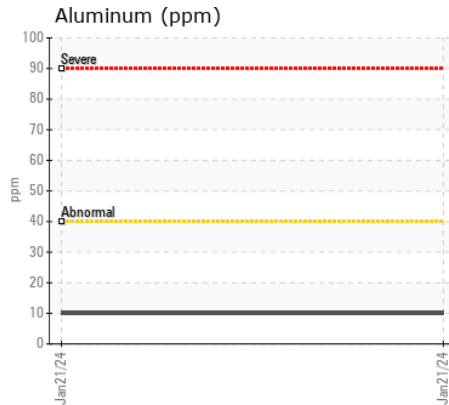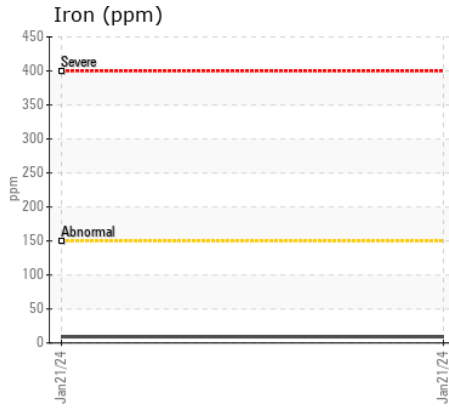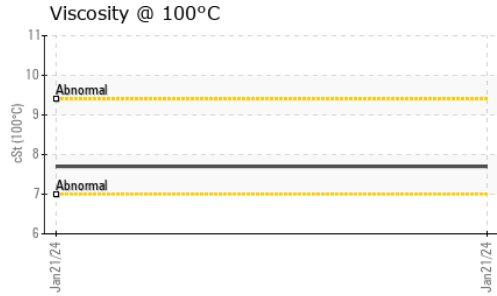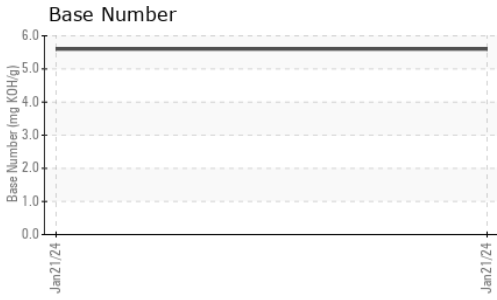

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCM1396342 **Received** : 30 Jan 2024
Lab Number : 06074452 **Diagnosed** : 31 Jan 2024
Unique Number : 10856543 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PANTERMEHL LAND CLEARING
 1427 BUG HILL RD.
 ASHFIELD, MA
 US 01330
 Contact: JEREMY DAVIS
 jdavisplc@yahoo.com
 T: (413)628-4777
 F: (413)628-4660