



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 300G 1FF300GXKMF731902

Component
Diesel Engine

Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0202675	JR0190645	---
Sample Date		Client Info		30 Jan 2024	10 Nov 2023	---
Machine Age	hrs	Client Info		2992	2690	---
Oil Age	hrs	Client Info		302	2690	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	8	19	---
Chromium	ppm	ASTM D5185m	>11	0	<1	---
Nickel	ppm	ASTM D5185m	>5	5	3	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	3	---
Lead	ppm	ASTM D5185m	>26	<1	0	---
Copper	ppm	ASTM D5185m	>26	6	3	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	9	10	---
Potassium	ppm	ASTM D5185m	>20	3	1	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	6.9	8.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	20.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	1	2	---
Boron	ppm	ASTM D5185m		258	178	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		243	253	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		819	865	---
Calcium	ppm	ASTM D5185m		1325	1398	---
Phosphorus	ppm	ASTM D5185m		842	886	---
Zinc	ppm	ASTM D5185m		1091	1094	---
Sulfur	ppm	ASTM D5185m		2952	2837	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	15.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.6	6.3	---
Visc @ 100°C	cSt	ASTM D445		14.0	13.8	---

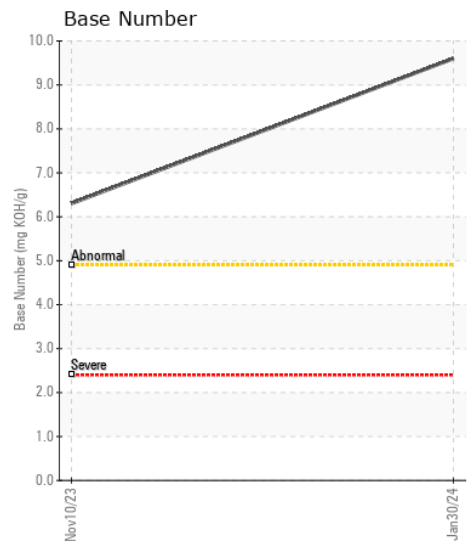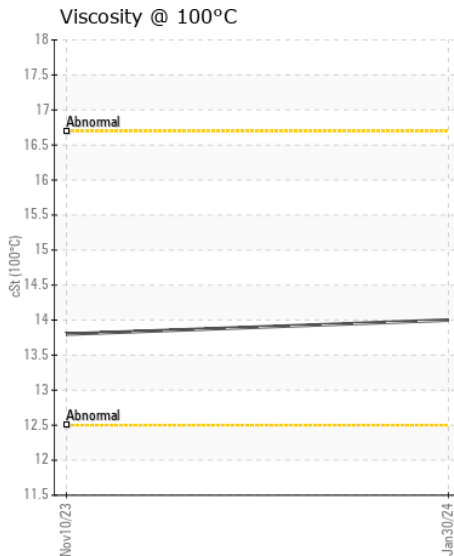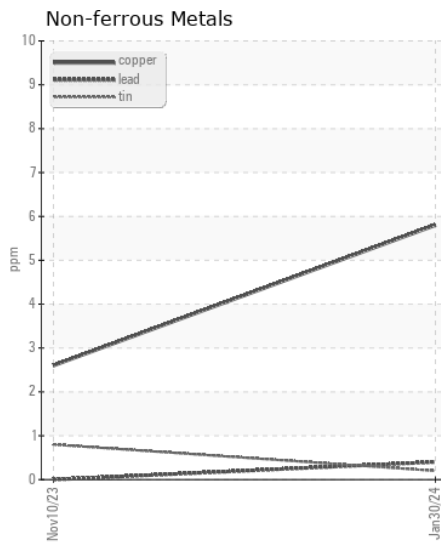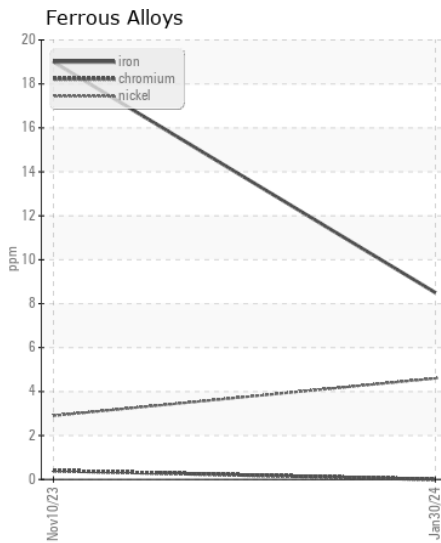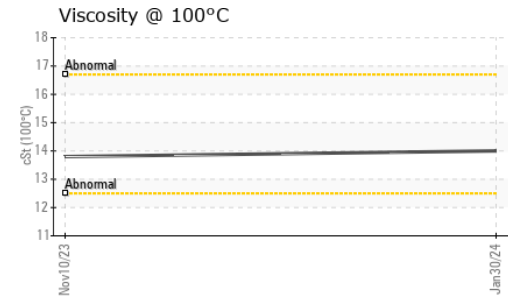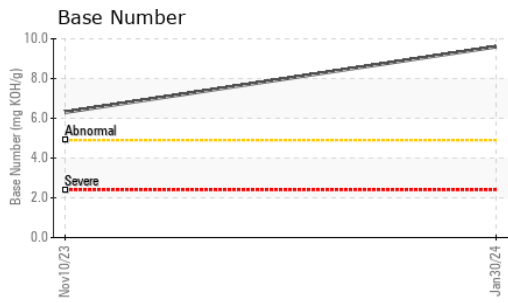

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0202675 **Received** : 30 Jan 2024
Lab Number : 06074475 **Diagnosed** : 31 Jan 2024
Unique Number : 10856566 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: TBN)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432