



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CDU**  
Machine Id  
**CDU (S/N 7-274416-1)**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON MEROPA 320 (250 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0060963</b>	MW0054909	MW0040223
Sample Date		Client Info		<b>07 Jan 2024</b>	06 Oct 2023	08 Jan 2023
Machine Age	hrs	Client Info		<b>89435</b>	87251	82505
Oil Age	hrs	Client Info		<b>20743</b>	18559	13813
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>None</b>	Not Changd	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>32</b>	29	27
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m	>100	<b>3</b>	2	2
Copper	ppm	ASTM D5185m	>50	<b>8</b>	8	8
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>3</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>6</b>	5	3
Boron	ppm	ASTM D5185m	20	<b>2</b>	<1	<1
Barium	ppm	ASTM D5185m		<b>0</b>	13	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>2</b>	<1	<1
Calcium	ppm	ASTM D5185m	25	<b>13</b>	11	10
Phosphorus	ppm	ASTM D5185m	235	<b>245</b>	220	226
Zinc	ppm	ASTM D5185m		<b>2</b>	0	4
Sulfur	ppm	ASTM D5185m		<b>6241</b>	5980	5414
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>1.08</b>	1.00	0.88
Visc @ 40°C	cSt	ASTM D445	304	<b>339</b>	336	335

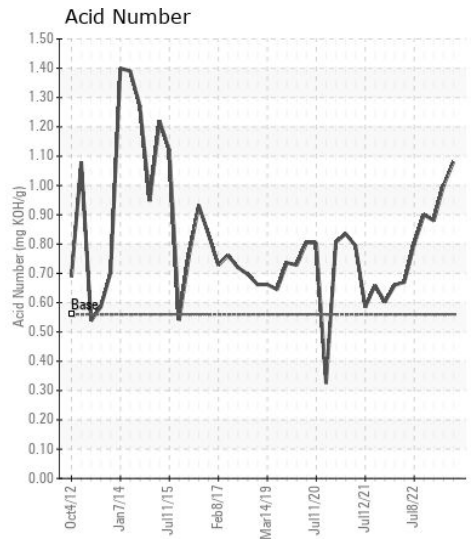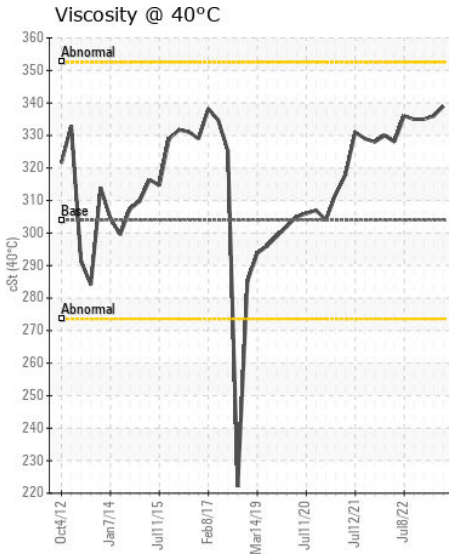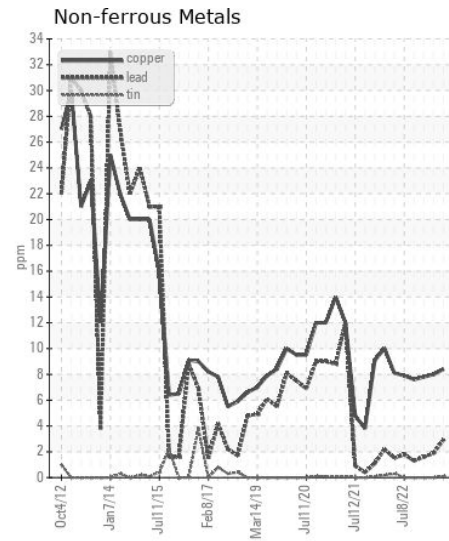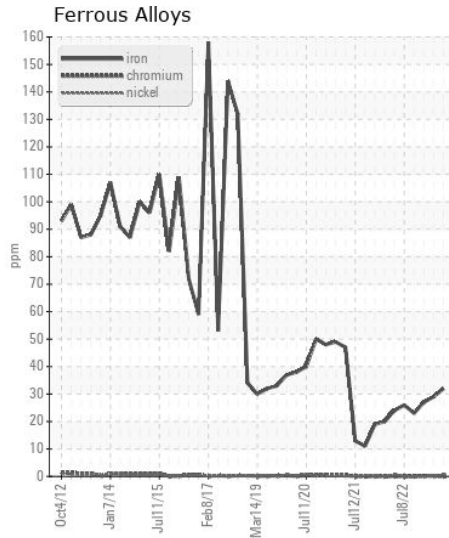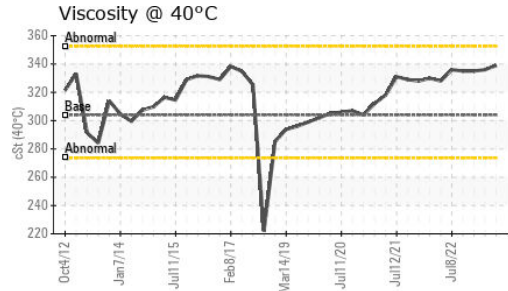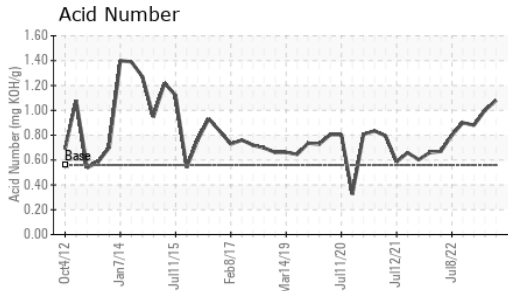

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0060963 **Received** : 30 Jan 2024  
**Lab Number** : 06074967 **Diagnosed** : 31 Jan 2024  
**Unique Number** : 10857058 **Diagnostician** : Wes Davis  
**Test Package** : MAR 2

**AMERICAN RIVER TRANSPORTATION CO.**  
P.O. BOX 2889  
ST. LOUIS, MO  
US 63111  
Contact: BRIAN GRIEWING  
brian.griewing@adm.com  
T:  
F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)