



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NEW HOLLAND UNITEK 10W40

Component
New (Unused) Oil
Fluid
{not provided} (--- LTR)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0070973	---	---
Sample Date		Client Info		25 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR









Iron	ppm	ASTM D5185m		14	---	---
Chromium	ppm	ASTM D5185m		<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		2	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		2	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Silicon	ppm	ASTM D5185m		9	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624		7.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415		19.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		127	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		69	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		407	---	---
Calcium	ppm	ASTM D5185m		1759	---	---
Phosphorus	ppm	ASTM D5185m		1104	---	---
Zinc	ppm	ASTM D5185m		1249	---	---
Sulfur	ppm	ASTM D5185m		3813	---	---
Oxidation	Abs/.1mm	*ASTM D7414		17.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.82	---	---
Visc @ 40°C	cSt	ASTM D445		91.24	---	---
Visc @ 100°C	cSt	ASTM D445		13.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270		146	---	---

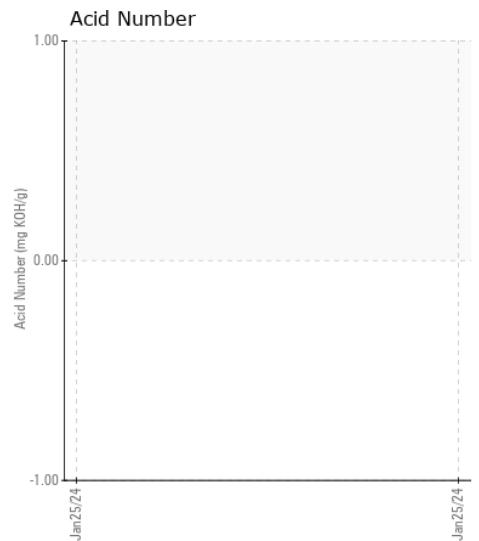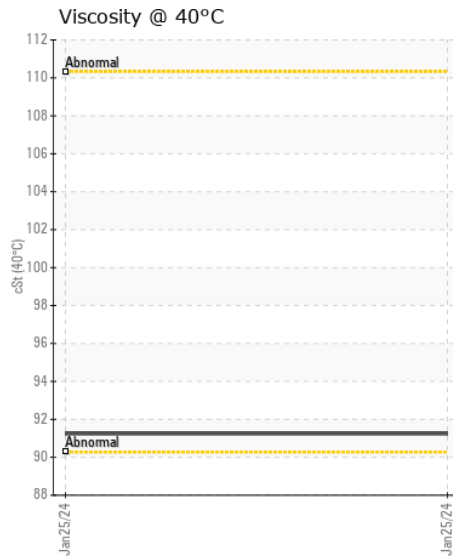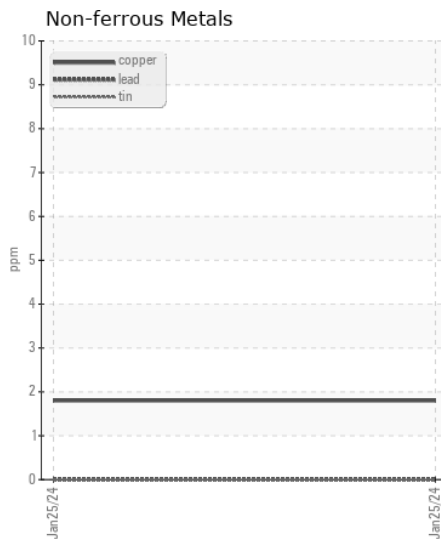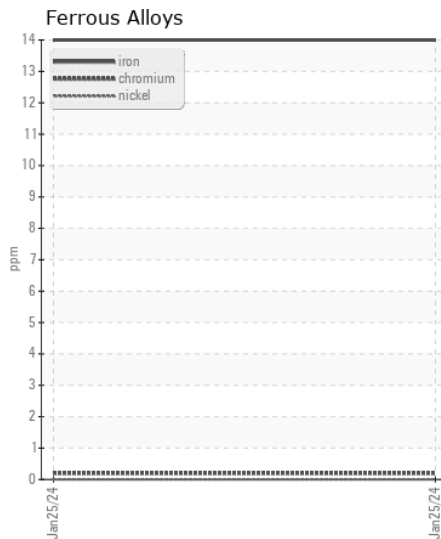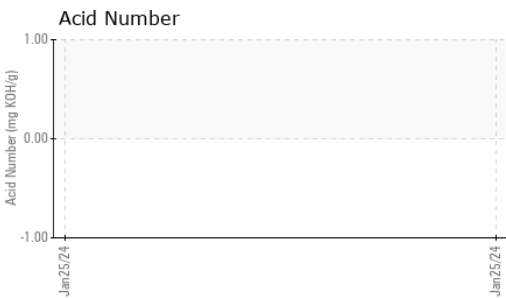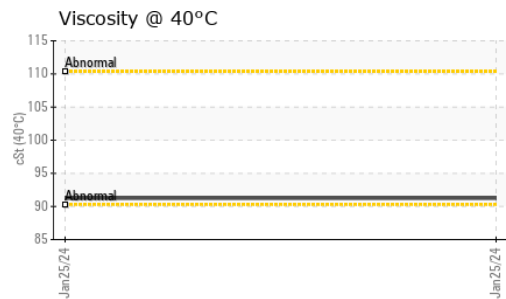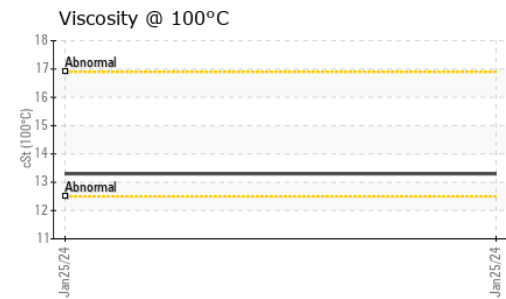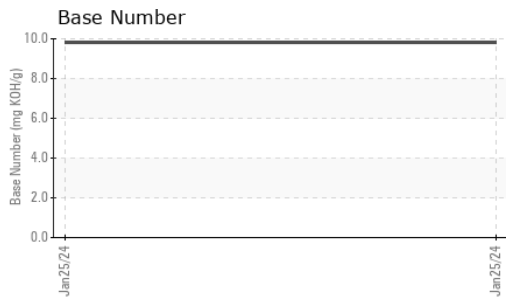

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0070973 **Received** : 30 Jan 2024
Lab Number : 06075016 **Diagnosed** : 05 Feb 2024
Unique Number : 10857107 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TBN, VI) Contact: KATRINA THOM

COLE OIL AND PROPANE
 265 FOREST AVE
 FOND DU LAC, WI
 US 54935

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: