



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 3 - Norton
 Machine Id
JOHN DEERE 750K LGP D17 (S/N F337030)
 Component
Transmission
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0047734	LEC0020670	LEC0014559
Sample Date		Client Info		13 Dec 2023	16 Apr 2021	14 Sep 2020
Machine Age	hrs	Client Info		4043	2100	1565
Oil Age	hrs	Client Info		4043	2100	1565
Filter Age	hrs	Client Info		500	1000	500
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		22	21	16
Iron	ppm	ASTM D5185m	>200	18	12	9
Chromium	ppm	ASTM D5185m	>10	8	5	4
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>50	2	3	3
Lead	ppm	ASTM D5185m	>50	1	2	1
Copper	ppm	ASTM D5185m	>200	7	4	4
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	4	1	3
Potassium	ppm	ASTM D5185m	>20	3	3	20
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m		2	4	<1
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		6	3	2
Calcium	ppm	ASTM D5185m	87	81	74	79
Phosphorus	ppm	ASTM D5185m	727	620	613	644
Zinc	ppm	ASTM D5185m	900	734	794	728
Sulfur	ppm	ASTM D5185m	1500	3383	3270	3116
Visc @ 40°C	cSt	ASTM D445	65	59.4	62.4	63.5

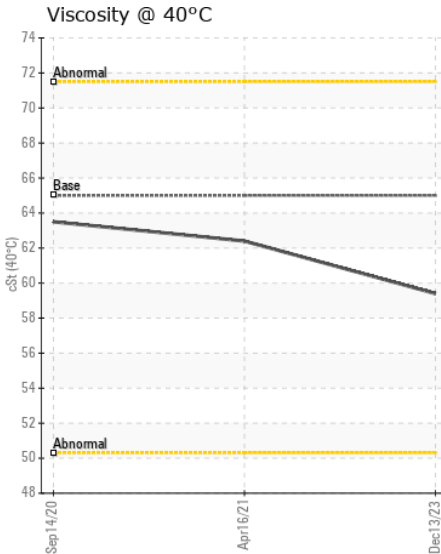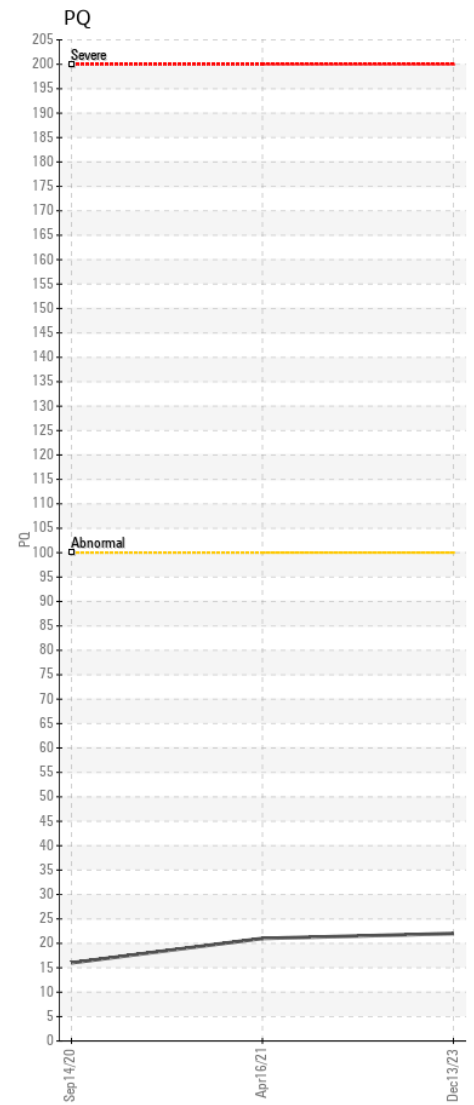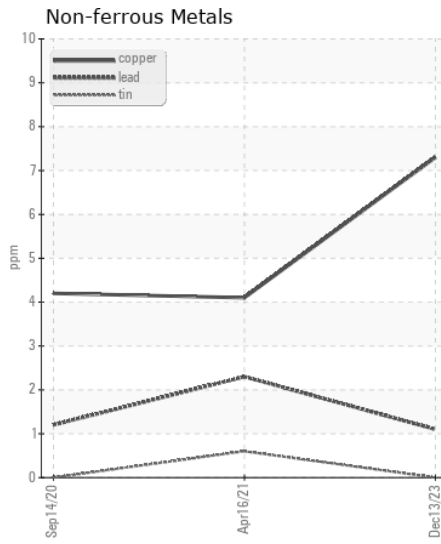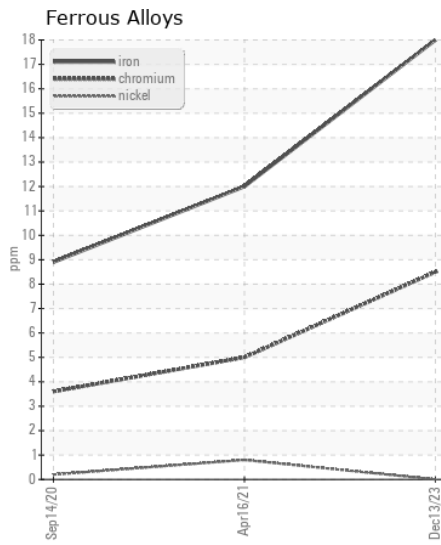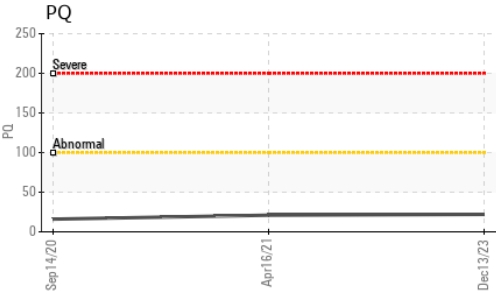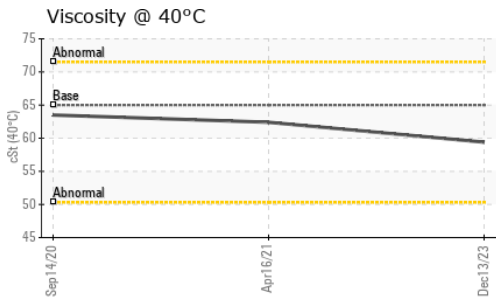

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0047734 **Received** : 30 Jan 2024
Lab Number : 06075039 **Diagnosed** : 31 Jan 2024
Unique Number : 10857130 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LANE PIPELINE
 2946 E MAIN ST
 BRIDGEPORT, WV
 US 26330
 Contact: SCOTT

T: (304)874-2727
 F: