



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 524P 524P/114854 (S/N 1DW524PAAMLZ13218)

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0044561	---	---
Sample Date		Client Info		26 Jan 2024	---	---
Machine Age	hrs	Client Info		621	---	---
Oil Age	hrs	Client Info		2	---	---
Filter Age	hrs	Client Info		2	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	13	---	---
Iron	ppm	ASTM D5185m	>200	11	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>7	0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>45	0	---	---
Copper	ppm	ASTM D5185m	>225	3	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	19	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		13	---	---
Boron	ppm	ASTM D5185m	6	2	---	---
Barium	ppm	ASTM D5185m	0	1	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	145	120	---	---
Calcium	ppm	ASTM D5185m	3570	3777	---	---
Phosphorus	ppm	ASTM D5185m	1290	1283	---	---
Zinc	ppm	ASTM D5185m	1640	1513	---	---
Sulfur	ppm	ASTM D5185m		4809	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	49.9	---	---

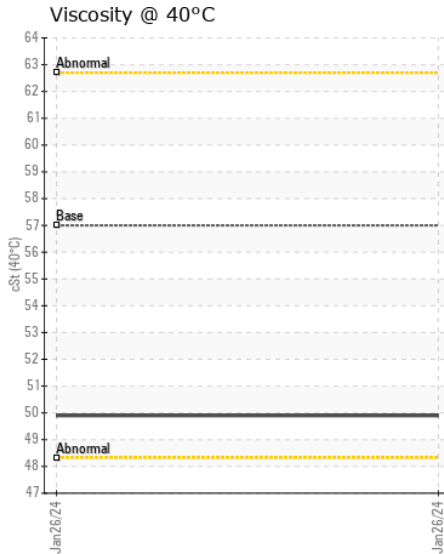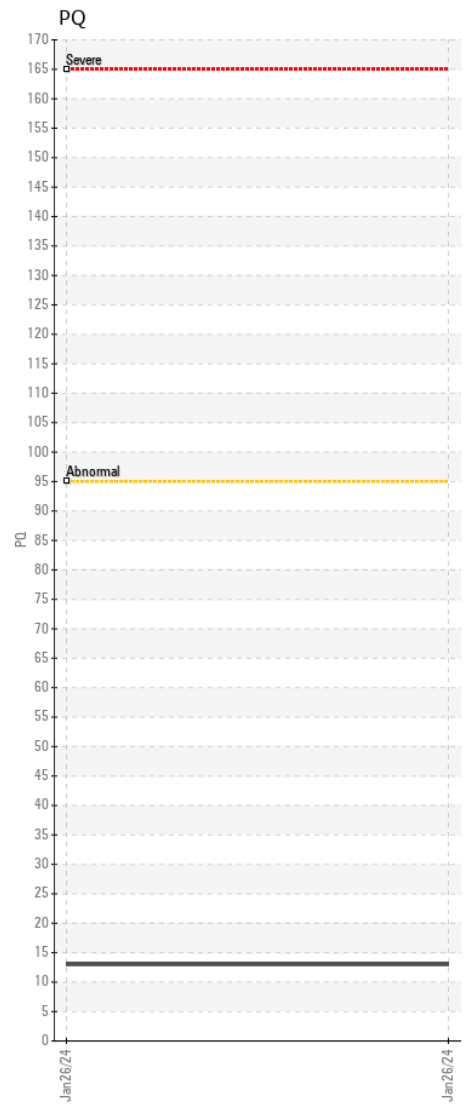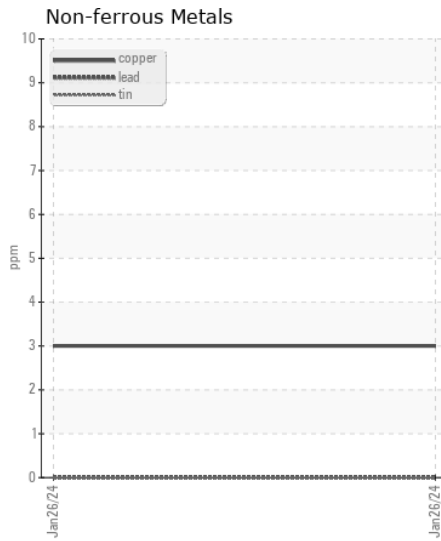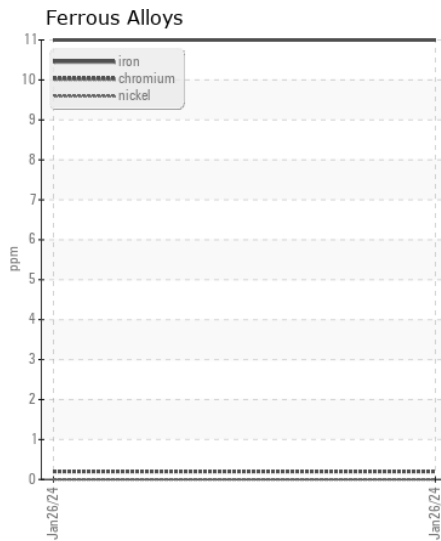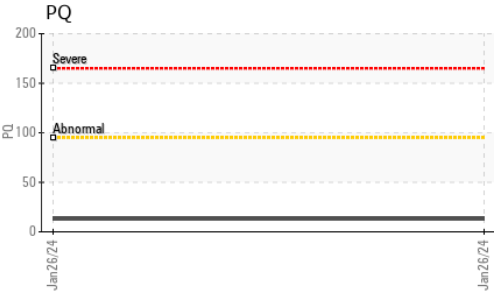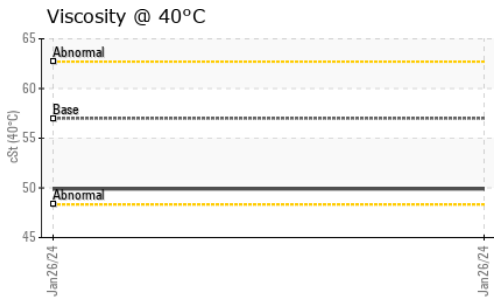

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0044561 **Recieved** : 30 Jan 2024
Lab Number : 06075042 **Diagnosed** : 01 Feb 2024
Unique Number : 10857133 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

BRIDGEPORT EQUIPMENT & TOOL
 15 ACME ST
 MARIETTA, OH
 US 45750
 Contact: ROBBIE CLIFTON
 rclifton@bridgeportequip.com
 T: (740)373-6686
 F: (740)373-3895

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)