



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 1DW748LBPPL718824
 Component
Rear Axle
 Fluid
TDH FLUID SAE 75W80 (32 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0200749	---	---
Sample Date		Client Info		28 Jan 2024	---	---
Machine Age	hrs	Client Info		532	---	---
Oil Age	hrs	Client Info		532	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		51	---	---
Iron	ppm	ASTM D5185m	>750	87	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	2	---	---
Lead	ppm	ASTM D5185m	>49	1	---	---
Copper	ppm	ASTM D5185m	>101	26	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	6	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	---	---
Boron	ppm	ASTM D5185m	10	3	---	---
Barium	ppm	ASTM D5185m	10	8	---	---
Molybdenum	ppm	ASTM D5185m	10	<1	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m	100	111	---	---
Calcium	ppm	ASTM D5185m	3500	3481	---	---
Phosphorus	ppm	ASTM D5185m	1150	1097	---	---
Zinc	ppm	ASTM D5185m	1150	1294	---	---
Sulfur	ppm	ASTM D5185m	5000	4193	---	---
Visc @ 40°C	cSt	ASTM D445	48	54.3	---	---

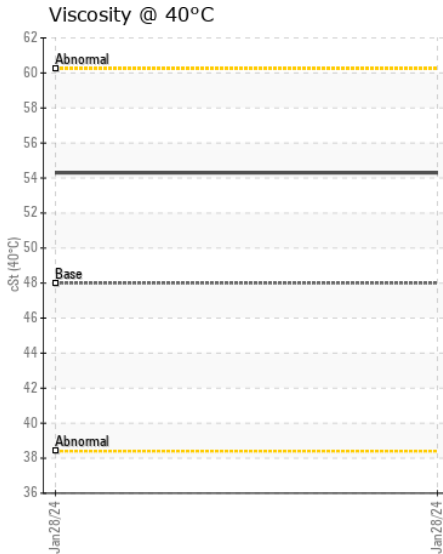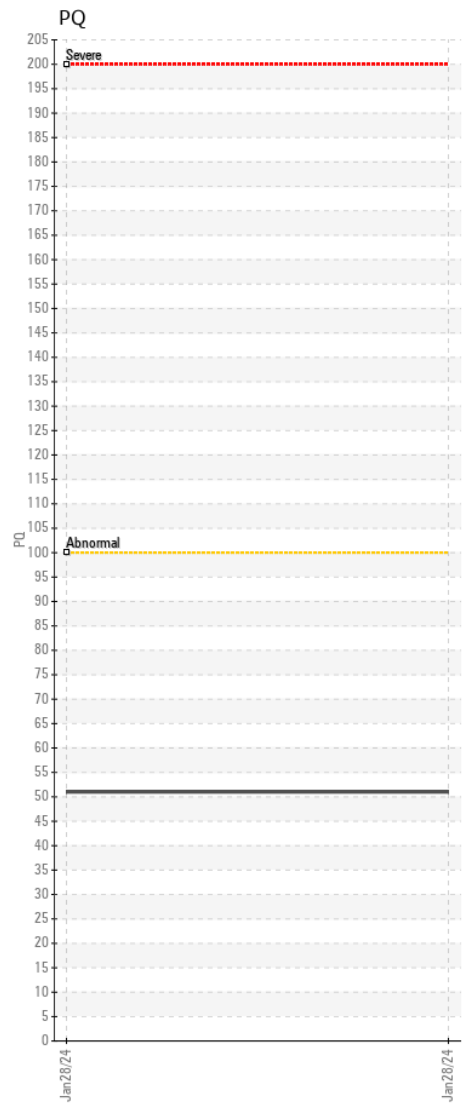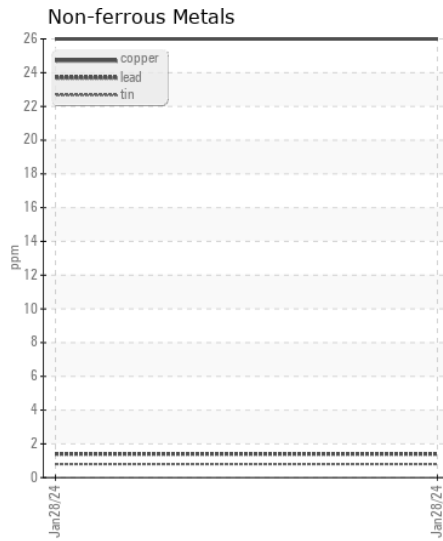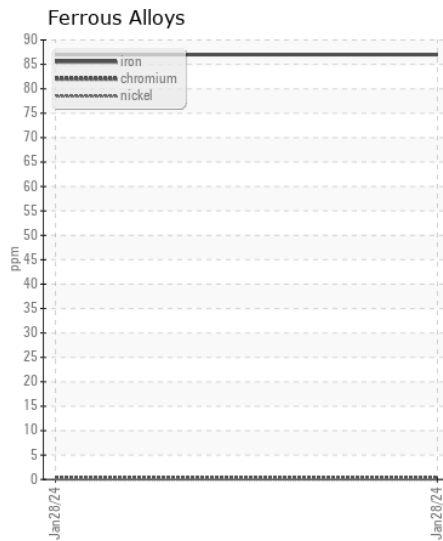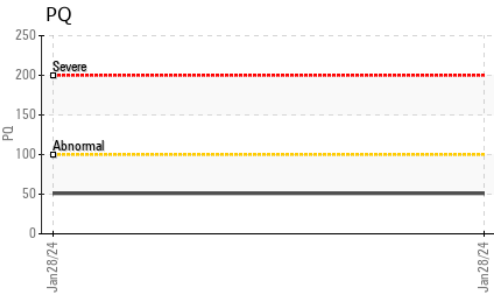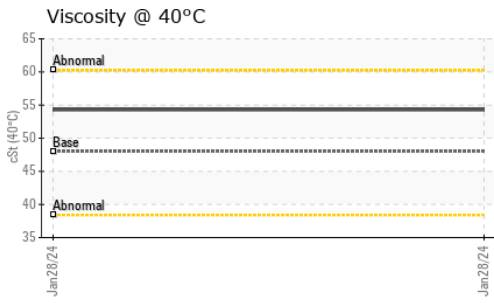

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200749 **Received** : 30 Jan 2024
Lab Number : 06075089 **Diagnosed** : 31 Jan 2024
Unique Number : 10857180 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

AMERICAN MATERIALS
P.O. BOX 16014
WICHITA, KS
US 67216
Contact: FRED THATALE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: